

Exam Questions 312-50v11

Certified Ethical Hacker Exam (CEH v11)

<https://www.2passeasy.com/dumps/312-50v11/>



NEW QUESTION 1

Which of the following allows attackers to draw a map or outline the target organization's network infrastructure to know about the actual environment that they are going to hack.

- A. Enumeration
- B. Vulnerability analysis
- C. Malware analysis
- D. Scanning networks

Answer: D

NEW QUESTION 2

A network administrator discovers several unknown files in the root directory of his Linux FTP server. One of the files is a tarball, two are shell script files, and the third is a binary file is named "nc." The FTP server's access logs show that the anonymous user account logged in to the server, uploaded the files, and extracted the contents of the tarball and ran the script using a function provided by the FTP server's software. The "ps" command shows that the "nc" file is running as process, and the netstat command shows the "nc" process is listening on a network port.

What kind of vulnerability must be present to make this remote attack possible?

- A. File system permissions
- B. Privilege escalation
- C. Directory traversal
- D. Brute force login

Answer: A

NEW QUESTION 3

When a normal TCP connection starts, a destination host receives a SYN (synchronize/start) packet from a source host and sends back a SYN/ACK (synchronize acknowledge). The destination host must then hear an ACK (acknowledge) of the SYN/ACK before the connection is established. This is referred to as the "TCP three-way handshake." While waiting for the ACK to the SYN ACK, a connection queue of finite size on the destination host keeps track of connections waiting to be completed. This queue typically empties quickly since the ACK is expected to arrive a few milliseconds after the SYN ACK.

How would an attacker exploit this design by launching TCP SYN attack?

- A. Attacker generates TCP SYN packets with random destination addresses towards a victim host
- B. Attacker floods TCP SYN packets with random source addresses towards a victim host
- C. Attacker generates TCP ACK packets with random source addresses towards a victim host
- D. Attacker generates TCP RST packets with random source addresses towards a victim host

Answer: B

NEW QUESTION 4

Josh has finished scanning a network and has discovered multiple vulnerable services. He knows that several of these usually have protections against external sources but are frequently susceptible to internal users. He decides to draft an email, spoof the sender as the internal IT team, and attach a malicious file disguised as a financial spreadsheet. Before Josh sends the email, he decides to investigate other methods of getting the file onto the system. For this particular attempt, what was the last stage of the cyber kill chain that Josh performed?

- A. Exploitation
- B. Weaponization
- C. Delivery
- D. Reconnaissance

Answer: B

NEW QUESTION 5

You start performing a penetration test against a specific website and have decided to start from grabbing all the links from the main page.

What Is the best Linux pipe to achieve your milestone?

- A. dirb https://site.com | grep "site"
- B. curl -s https://sile.com | grep "< a href-\`http" | grep "Site-com- | cut -d "V" -f 2
- C. wget https://stte.com | grep "< a href=\`*http" | grep "site.com"
- D. wgethttps://site.com | cut-d"http

Answer: C

NEW QUESTION 6

Null sessions are un-authenticated connections (not using a username or password.) to an NT or 2000 system. Which TCP and UDP ports must you filter to check null sessions on your network?

- A. 137 and 139
- B. 137 and 443
- C. 139 and 443
- D. 139 and 445

Answer: D

NEW QUESTION 7

Which of the following Metasploit post-exploitation modules can be used to escalate privileges on Windows systems?

- A. getsystem
- B. getuid
- C. keylogrecorder
- D. autoroute

Answer: A

NEW QUESTION 8

An incident investigator asks to receive a copy of the event logs from all firewalls, proxy servers, and Intrusion Detection Systems (IDS) on the network of an organization that has experienced a possible breach of security. When the investigator attempts to correlate the information in all of the logs, the sequence of many of the logged events do not match up.

What is the most likely cause?

- A. The network devices are not all synchronized.
- B. Proper chain of custody was not observed while collecting the logs.
- C. The attacker altered or erased events from the logs.
- D. The security breach was a false positive.

Answer: A

NEW QUESTION 9

In Trojan terminology, what is a covert channel?



- A. A channel that transfers information within a computer system or network in a way that violates the security policy
- B. A legitimate communication path within a computer system or network for transfer of data
- C. It is a kernel operation that hides boot processes and services to mask detection
- D. It is Reverse tunneling technique that uses HTTPS protocol instead of HTTP protocol to establish connections

Answer: A

NEW QUESTION 10

Which of the following incident handling process phases is responsible for defining rules, collaborating human workforce, creating a back-up plan, and testing the plans for an organization?

- A. Preparation phase
- B. Containment phase
- C. Identification phase
- D. Recovery phase

Answer: A

NEW QUESTION 10

Jacob works as a system administrator in an organization. He wants to extract the source code of a mobile application and disassemble the application to analyze its design flaws. Using this technique, he wants to fix any bugs in the application, discover underlying vulnerabilities, and improve defense strategies against attacks.

What is the technique used by Jacob in the above scenario to improve the security of the mobile application?

- A. Reverse engineering
- B. App sandboxing
- C. Jailbreaking
- D. Social engineering

Answer: A

NEW QUESTION 13

The change of a hard drive failure is once every three years. The cost to buy a new hard drive is \$300. It will require 10 hours to restore the OS and software to the new hard disk. It will require a further 4 hours to restore the database from the last backup to the new hard disk. The recovery person earns \$10/hour. Calculate the SLE, ARO, and ALE. Assume the EF = 1(100%). What is the closest approximate cost of this replacement and recovery operation per year?

- A. \$1320
- B. \$440
- C. \$100
- D. \$146

Answer: D

NEW QUESTION 17

Suppose your company has just passed a security risk assessment exercise. The results display that the risk of the breach in the main company application is 50%. Security staff has taken some measures and implemented the necessary controls. After that, another security risk assessment was performed showing that risk has decreased to 10%. The risk threshold for the application is 20%. Which of the following risk decisions will be the best for the project in terms of its successful continuation with the most business profit?

- A. Accept the risk
- B. Introduce more controls to bring risk to 0%
- C. Mitigate the risk
- D. Avoid the risk

Answer: A

NEW QUESTION 21

To invisibly maintain access to a machine, an attacker utilizes a toolkit that sits undetected in the core components of the operating system. What is this type of rootkit an example of?

- A. Hypervisor rootkit
- B. Kernel toolkit
- C. Hardware rootkit
- D. Firmware rootkit

Answer: B

Explanation:

Kernel-mode rootkits run with the best operating system privileges (Ring 0) by adding code or replacement parts of the core operating system, as well as each the kernel and associated device drivers. Most operative systems support kernel-mode device drivers, that execute with a similar privileges because the software itself. As such, several kernel-mode rootkits square measure developed as device drivers or loadable modules, like loadable kernel modules in Linux or device drivers in Microsoft Windows. This category of rootkit has unrestricted security access, however is tougher to jot down. The quality makes bugs common, and any bugs in code operative at the kernel level could seriously impact system stability, resulting in discovery of the rootkit. one amongst the primary wide familiar kernel rootkits was developed for Windows NT four.0 and discharged in Phrack magazine in 1999 by Greg Hoglund. Kernel rootkits is particularly tough to observe and take away as a result of they operate at a similar security level because the software itself, and square measure therefore able to intercept or subvert the foremost sure software operations. Any package, like antivirus package, running on the compromised system is equally vulnerable. during this scenario, no a part of the system is sure.

NEW QUESTION 25

The security team of Debry Inc. decided to upgrade Wi-Fi security to thwart attacks such as dictionary attacks and key recovery attacks. For this purpose, the security team started implementing cutting-edge technology that uses a modern key establishment protocol called the simultaneous authentication of equals (SAE), also known as dragonfly key exchange, which replaces the PSK concept. What is the Wi-Fi encryption technology implemented by Debry Inc.?

- A. WEP
- B. WPA
- C. WPA2
- D. WPA3

Answer: C

NEW QUESTION 27

Email is transmitted across the Internet using the Simple Mail Transport Protocol. SMTP does not encrypt email, leaving the information in the message vulnerable to being read by an unauthorized person. SMTP can upgrade a connection between two mail servers to use TLS. Email transmitted by SMTP over TLS is encrypted. What is the name of the command used by SMTP to transmit email over TLS?

- A. OPPORTUNISTIC TLS
- B. UPGRADE TLS
- C. FORCE TLS
- D. START TLS

Answer: D

NEW QUESTION 32

Morris, a professional hacker, performed a vulnerability scan on a target organization by sniffing the traffic on the network to identify the active systems, network services, applications, and vulnerabilities. He also obtained the list of the users who are currently accessing the network. What is the type of vulnerability assessment that Morris performed on the target organization?

- A. internal assessment
- B. Passive assessment
- C. External assessment
- D. Credentialed assessment

Answer: B

Explanation:

Passive Assessment Passive assessments sniff the traffic present on the network to identify the active systems, network services, applications, and vulnerabilities. Passive assessments also provide a list of the users who are currently accessing the network.

NEW QUESTION 33

This type of injection attack does not show any error message. It is difficult to exploit as it returns information when the application is given SQL payloads that elicit a true or false response from the server. By observing the response, an attacker can extract sensitive information. What type of attack is this?

- A. Time-based SQL injection
- B. Union SQL injection
- C. Error-based SQL injection
- D. Blind SQL injection

Answer: D

NEW QUESTION 34

When discussing passwords, what is considered a brute force attack?

- A. You attempt every single possibility until you exhaust all possible combinations or discover the password
- B. You threaten to use the rubber hose on someone unless they reveal their password
- C. You load a dictionary of words into your cracking program
- D. You create hashes of a large number of words and compare it with the encrypted passwords
- E. You wait until the password expires

Answer: A

NEW QUESTION 35

While performing an Nmap scan against a host, Paola determines the existence of a firewall. In an attempt to determine whether the firewall is stateful or stateless, which of the following options would be best to use?

- A. -sA
- B. -sX
- C. -sT
- D. -sF

Answer: A

NEW QUESTION 38

You have retrieved the raw hash values from a Windows 2000 Domain Controller. Using social engineering, you come to know that they are enforcing strong passwords. You understand that all users are required to use passwords that are at least 8 characters in length. All passwords must also use 3 of the 4 following categories: lower case letters, capital letters, numbers and special characters. With your existing knowledge of users, likely user account names and the possibility that they will choose the easiest passwords possible, what would be the fastest type of password cracking attack you can run against these hash values and still get results?

- A. Online Attack
- B. Dictionary Attack
- C. Brute Force Attack
- D. Hybrid Attack

Answer: D

NEW QUESTION 41

As a Certified Ethical Hacker, you were contracted by a private firm to conduct an external security assessment through penetration testing. What document describes the specifics of the testing, the associated violations, and essentially protects both the organization's interest and your liabilities as a tester?

- A. Service Level Agreement
- B. Project Scope
- C. Rules of Engagement
- D. Non-Disclosure Agreement

Answer: C

NEW QUESTION 45

Which among the following is the best example of the hacking concept called "clearing tracks"?

- A. After a system is breached, a hacker creates a backdoor to allow re-entry into a system.
- B. During a cyberattack, a hacker injects a rootkit into a server.
- C. An attacker gains access to a server through an exploitable vulnerability.
- D. During a cyberattack, a hacker corrupts the event logs on all machines.

Answer: D

NEW QUESTION 49

You are attempting to run an Nmap port scan on a web server. Which of the following commands would result in a scan of common ports with the least amount of noise in order to evade IDS?

- A. nmap -A -Pn
- B. nmap -sP -p-65535 -T5
- C. nmap -sT -O -T0
- D. nmap -A --host-timeout 99 -T1

Answer: C

NEW QUESTION 50

Robin, a professional hacker, targeted an organization's network to sniff all the traffic. During this process. Robin plugged in a rogue switch to an unused port in the LAN with a priority lower than any other switch in the network so that he could make it a root bridge that will later allow him to sniff all the traffic in the network. What is the attack performed by Robin in the above scenario?

- A. ARP spoofing attack
- B. VLAN hopping attack
- C. DNS poisoning attack
- D. STP attack


Answer: D

Explanation:

STP prevents bridging loops in a redundant switched network environment. By avoiding loops, you can ensure that broadcast traffic does not become a traffic storm.

STP is a hierarchical tree-like topology with a "root" switch at the top. A switch is elected as root based on the lowest configured priority of any switch (0 through 65,535). When a switch boots up, it begins a process of identifying other switches and determining the root bridge. After a root bridge is elected, the topology is established from its perspective of the connectivity. The switches determine the path to the root bridge, and all redundant paths are blocked. STP sends configuration and topology change notifications and acknowledgments (TCN/TCA) using bridge protocol data units (BPDU).

An STP attack involves an attacker spoofing the root bridge in the topology. The attacker broadcasts out an STP configuration/topology change BPDU in an attempt to force an STP recalculation. The BPDU sent out announces that the attacker's system has a lower bridge priority. The attacker can then see a variety of frames forwarded from other switches to it. STP recalculation may also cause a denial-of-service (DoS) condition on the network by causing an interruption of 30 to 45 seconds each time the root bridge changes. An attacker using STP network topology changes to force its host to be elected as the root bridge.

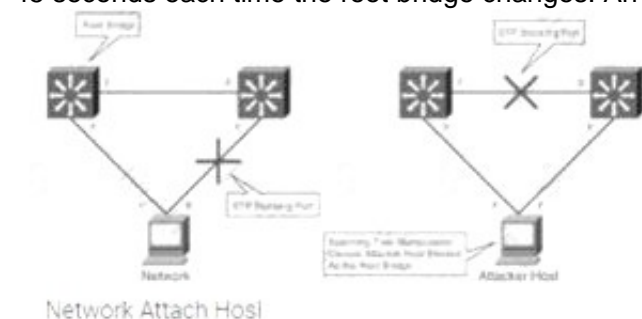

switch

NEW QUESTION 51

To reach a bank web site, the traffic from workstations must pass through a firewall. You have been asked to review the firewall configuration to ensure that workstations in network 10.10.10.0/24 can only reach the bank web site 10.20.20.1 using https. Which of the following firewall rules meets this requirement?

- A. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 443) then permit
- B. If (source matches 10.10.10.0/24 and destination matches 10.20.20.1 and port matches 80 or 443) then permit
- C. If (source matches 10.20.20.1 and destination matches 10.10.10.0/24 and port matches 443) then permit
- D. If (source matches 10.10.10.0 and destination matches 10.20.20.1 and port matches 443) then permit

Answer: A

NEW QUESTION 53

Which of the following Bluetooth hacking techniques does an attacker use to send messages to users without the recipient's consent, similar to email spamming?

- A. Bluesmacking
- B. BlueSniffing
- C. Bluejacking
- D. Bluesnarfing

Answer: C

NEW QUESTION 57

Jack, a disgruntled ex-employee of Incalsol Ltd., decided to inject fileless malware into Incalsol's systems. To deliver the malware, he used the current employees' email IDs to send fraudulent emails embedded with malicious links that seem to be legitimate. When a victim employee clicks on the link, they are directed to a fraudulent website that automatically loads Flash and triggers the exploit. What is the technique used by Jack to launch the fileless malware on the target systems?

- A. In-memory exploits
- B. Phishing
- C. Legitimate applications
- D. Script-based injection

Answer: B

NEW QUESTION 58

Upon establishing his new startup, Tom hired a cloud service provider (CSP) but was dissatisfied with their service and wanted to move to another CSP. What part of the contract might prevent him from doing so?

- A. Virtualization
- B. Lock-in
- C. Lock-down
- D. Lock-up

Answer: B

NEW QUESTION 60

DHCP snooping is a great solution to prevent rogue DHCP servers on your network. Which security feature on switchers leverages the DHCP snooping database to help prevent man-in-the-middle attacks?

- A. Spanning tree
- B. Dynamic ARP Inspection (DAI)
- C. Port security
- D. Layer 2 Attack Prevention Protocol (LAPP)

Answer: B

NEW QUESTION 62

What is the minimum number of network connections in a multihomed firewall?

- A. 3
- B. 5
- C. 4
- D. 2

Answer: A

NEW QUESTION 64

What is the proper response for a NULL scan if the port is closed?

- A. SYN
- B. ACK
- C. FIN
- D. PSH
- E. RST
- F. No response

Answer: E

NEW QUESTION 66

Mary found a high vulnerability during a vulnerability scan and notified her server team. After analysis, they sent her proof that a fix to that issue had already been applied. The vulnerability that Marry found is called what?

- A. False-negative
- B. False-positive
- C. Brute force attack
- D. Backdoor

Answer: B

NEW QUESTION 69

While examining audit logs, you discover that people are able to telnet into the SMTP server on port 25. You would like to block this, though you do not see any evidence of an attack or other wrong doing. However, you are concerned about affecting the normal functionality of the email server. From the following options choose how best you can achieve this objective?

- A. Block port 25 at the firewall.
- B. Shut off the SMTP service on the server.
- C. Force all connections to use a username and password.
- D. Switch from Windows Exchange to UNIX Sendmail.
- E. None of the above.

Answer: E

NEW QUESTION 71

Steve, a scientist who works in a governmental security agency, developed a technological solution to identify people based on walking patterns and implemented this approach to a physical control access.

A camera captures people walking and identifies the individuals using Steve's approach.

After that, people must approximate their RFID badges. Both the identifications are required to open the door. In this case, we can say:

- A. Although the approach has two phases, it actually implements just one authentication factor
- B. The solution implements the two authentication factors: physical object and physical characteristic
- C. The solution will have a high level of false positives
- D. Biological motion cannot be used to identify people

Answer: B

NEW QUESTION 72

Ricardo has discovered the username for an application in his targets environment. As he has a limited amount of time, he decides to attempt to use a list of common passwords he found on the Internet. He compiles them into a list and then feeds that list as an argument into his password-cracking application, what type of attack is Ricardo performing?

- A. Known plaintext
- B. Password spraying

- C. Brute force
- D. Dictionary

Answer: D

Explanation:

A dictionary Attack as an attack vector utilized by the attacker to break in a very system, that is password protected, by golf shot technically each word in a very dictionary as a variety of password for that system. This attack vector could be a variety of Brute Force Attack.

The lexicon will contain words from an English dictionary and conjointly some leaked list of commonly used passwords and once combined with common character substitution with numbers, will generally be terribly effective and quick.

How is it done?

Basically, it's attempting each single word that's already ready. it's done victimization machine-controlled tools that strive all the possible words within the dictionary.

Some password Cracking Software:

- John the ripper
- L0phtCrack
- Aircrack-ng

NEW QUESTION 73

Which of the following is the primary objective of a rootkit?

- A. It opens a port to provide an unauthorized service
- B. It creates a buffer overflow
- C. It replaces legitimate programs
- D. It provides an undocumented opening in a program

Answer: C

NEW QUESTION 74

Wilson, a professional hacker, targets an organization for financial benefit and plans to compromise its systems by sending malicious emails. For this purpose, he uses a tool to track the emails of the target and extracts information such as sender identities, mail servers, sender IP addresses, and sender locations from different public sources. He also checks if an email address was leaked using the haveibeenpwned.com API. Which of the following tools is used by Wilson in the above scenario?

- A. Factiva
- B. Netcraft
- C. infoga
- D. Zoominfo

Answer: C

Explanation:

Infoga may be a tool gathering email accounts informations (ip,hostname,country,...) from completely different public supply (search engines, pgp key servers and shodan) and check if email was leaked using haveibeenpwned.com API. is a really simple tool, however very effective for the first stages of a penetration test or just to know the visibility of your company within the net.

NEW QUESTION 77

When you are getting information about a web server, it is very important to know the HTTP Methods (GET, POST, HEAD, PUT, DELETE, TRACE) that are available because there are two critical methods (PUT and DELETE). PUT can upload a file to the server and DELETE can delete a file from the server. You can detect all these methods (GET, POST, HEAD, DELETE, PUT, TRACE) using NMAP script engine. What Nmap script will help you with this task?

- A. http-methods
- B. http_enum
- C. http-headers
- D. http-git

Answer: A

NEW QUESTION 78

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.
- B. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- C. Symmetric encryption allows the server to security transmit the session keys out-of-band.
- D. Asymmetric cryptography is computationally expensive in compariso
- E. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.

Answer: A

NEW QUESTION 83

Techno Security Inc. recently hired John as a penetration tester. He was tasked with identifying open ports in the target network and determining whether the ports are online and any firewall rule sets are encountered. John decided to perform a TCP SYN ping scan on the target network. Which of the following Nmap commands must John use to perform the TCP SYN ping scan?

- A. nmap -sn -pp < target ip address >
- B. nmap -sn -PO < target IP address >
- C. nmap -sn -PS < target IP address >
- D. nmap -sn -PA < target IP address >

- A. The use of security agents in clients' computers
- B. The use of DNSSEC
- C. The use of double-factor authentication
- D. Client awareness

Answer: B

NEW QUESTION 94

Mary, a penetration tester, has found password hashes in a client system she managed to breach. She needs to use these passwords to continue with the test, but she does not have time to find the passwords that correspond to these hashes. Which type of attack can she implement in order to continue?

- A. LLMNR/NBT-NS poisoning
- B. Internal monologue attack
- C. Pass the ticket
- D. Pass the hash

Answer: D

NEW QUESTION 98

Under what conditions does a secondary name server request a zone transfer from a primary name server?

- A. When a primary SOA is higher than a secondary SOA
- B. When a secondary SOA is higher than a primary SOA
- C. When a primary name server has had its service restarted
- D. When a secondary name server has had its service restarted
- E. When the TTL falls to zero

Answer: A

NEW QUESTION 99

A group of hackers were roaming around a bank office building in a city, driving a luxury car. They were using hacking tools on their laptop with the intention to find a free-access wireless network. What is this hacking process known as?

- A. GPS mapping
- B. Spectrum analysis
- C. Wardriving
- D. Wireless sniffing

Answer: C

NEW QUESTION 101

The security administrator of ABC needs to permit Internet traffic in the host 10.0.0.2 and UDP traffic in the host 10.1.1.3. He also needs to permit all FTP traffic to the rest of the network and deny all other traffic. After he applied his ACL configuration in the router, nobody can access the ftp, and the permitted hosts cannot access the Internet. According to the next configuration, what is happening in the network?

```
access-list 102 deny tcp any any
access-list 104 permit udp host 10.0.0.3 any
access-list 110 permit tcp host 10.0.0.2 eq www any
access-list 108 permit tcp any eq ftp any
```

- A. The ACL 104 needs to be first because it is UDP
- B. The first ACL is denying all TCP traffic and the other ACLs are being ignored by the router
- C. The ACL for FTP must be before the ACL 110
- D. The ACL 110 needs to be changed to port 80

Answer: B

NEW QUESTION 103

Which protocol is used for setting up secure channels between two devices, typically in VPNs?

- A. PEM
- B. ppp
- C. IPSEC
- D. SET

Answer: C

NEW QUESTION 108

A hacker is an intelligent individual with excellent computer skills and the ability to explore a computer's software and hardware without the owner's permission. Their intention can either be to simply gain knowledge or to illegally make changes.

Which of the following class of hacker refers to an individual who works both offensively and defensively at various times?

- A. White Hat
- B. Suicide Hacker
- C. Gray Hat
- D. Black Hat

Answer: C

NEW QUESTION 111

When configuring wireless on his home router, Javik disables SSID broadcast. He leaves authentication “open” but sets the SSID to a 32-character string of random letters and numbers.

What is an accurate assessment of this scenario from a security perspective?

- A. Since the SSID is required in order to connect, the 32-character string is sufficient to prevent brute-force attacks.
- B. Disabling SSID broadcast prevents 802.11 beacons from being transmitted from the access point, resulting in a valid setup leveraging “security through obscurity”.
- C. It is still possible for a hacker to connect to the network after sniffing the SSID from a successful wireless association.
- D. Javik’s router is still vulnerable to wireless hacking attempts because the SSID broadcast setting can be enabled using a specially crafted packet sent to the hardware address of the access point.

Answer: C

NEW QUESTION 113

Alice, a professional hacker, targeted an organization's cloud services. She infiltrated the targets MSP provider by sending spear-phishing emails and distributed custom-made malware to compromise user accounts and gain remote access to the cloud service. Further, she accessed the target customer profiles with her MSP account, compressed the customer data, and stored them in the MSP. Then, she used this information to launch further attacks on the target organization. Which of the following cloud attacks did Alice perform in the above scenario?

- A. Cloud hopper attack
- B. Cloud cryptojacking
- C. Cloudborne attack
- D. Man-in-the-cloud (MITC) attack

Answer: A

Explanation:

Operation Cloud Hopper was an in depth attack and theft of data in 2017 directed at MSP within the uk (U.K.), us (U.S.), Japan, Canada, Brazil, France, Switzerland, Norway, Finland, Sweden, South Africa , India, Thailand, South Korea and Australia. The group used MSP as intermediaries to accumulate assets and trade secrets from MSP client engineering, MSP industrial manufacturing, retail, energy, pharmaceuticals, telecommunications, and government agencies. Operation Cloud Hopper used over 70 variants of backdoors, malware and trojans. These were delivered through spear-phishing emails. The attacks scheduled tasks or leveraged services/utilities to continue Microsoft Windows systems albeit the pc system was rebooted. It installed malware and hacking tools to access systems and steal data.

NEW QUESTION 117

Sam, a professional hacker. targeted an organization with intention of compromising AWS IAM credentials. He attempted to lure one of the employees of the organization by initiating fake calls while posing as a legitimate employee. Moreover, he sent phishing emails to steal the AWS IAM credentials and further compromise the employee's account. What is the technique used by Sam to compromise the AWS IAM credentials?

- A. Social engineering
- B. insider threat
- C. Password reuse
- D. Reverse engineering

Answer: A

Explanation:

Just like any other service that accepts usernames and passwords for logging in, AWS users are vulnerable to social engineering attacks from attackers. fake emails, calls, or any other method of social engineering, may find yourself with an AWS users’ credentials within the hands of an attacker.

If a user only uses API keys for accessing AWS, general phishing techniques could still use to gain access to other accounts or their pc itself, where the attacker may then pull the API keys for aforementioned AWS user.

With basic opensource intelligence (OSINT), it’s usually simple to collect a list of workers of an organization that use AWS on a regular basis. This list will then be targeted with spear phishing to do and gather credentials. an easy technique may include an email that says your bill has spiked 500th within the past 24 hours, “click here for additional information”, and when they click the link, they’re forwarded to a malicious copy of the AWS login page designed to steal their credentials.

An example of such an email will be seen within the screenshot below. it’s exactly like an email that AWS would send to you if you were to exceed the free tier limits, except for a few little changes. If you clicked on any of the highlighted regions within the screenshot, you’d not be taken to the official AWS web site and you’d instead be forwarded to a pretend login page setup to steal your credentials.

These emails will get even more specific by playing a touch bit additional OSINT before causing them out. If an attacker was ready to discover your AWS account ID on-line somewhere, they could use methods we at rhino have free previously to enumerate what users and roles exist in your account with none logs contact on your side. they could use this list to more refine their target list, further as their emails to reference services they will know that you often use.

For reference, the journal post for using AWS account IDs for role enumeration will be found here and the journal post for using AWS account IDs for user enumeration will be found here.

During engagements at rhino, we find that phishing is one in all the fastest ways for us to achieve access to an AWS environment.

NEW QUESTION 119

What is the way to decide how a packet will move from an untrusted outside host to a protected inside that is behind a firewall, which permits the hacker to determine which ports are open and if the packets can pass through the packet-filtering of the firewall?

- A. Session hijacking
- B. Firewalking
- C. Man-in-the middle attack
- D. Network sniffing

Answer: B

NEW QUESTION 123

An attacker utilizes a Wi-Fi Pineapple to run an access point with a legitimate-looking SSID for a nearby business in order to capture the wireless password. What

kind of attack is this?

- A. MAC spoofing attack
- B. Evil-twin attack
- C. War driving attack
- D. Phishing attack

Answer: B

NEW QUESTION 128

John is an incident handler at a financial institution. His steps in a recent incident are not up to the standards of the company. John frequently forgets some steps and procedures while handling responses as they are very stressful to perform. Which of the following actions should John take to overcome this problem with the least administrative effort?

- A. Create an incident checklist.
- B. Select someone else to check the procedures.
- C. Increase his technical skills.
- D. Read the incident manual every time it occurs.

Answer: C

NEW QUESTION 132

The company ABC recently contracts a new accountant. The accountant will be working with the financial statements. Those financial statements need to be approved by the CFO and then they will be sent to the accountant but the CFO is worried because he wants to be sure that the information sent to the accountant was not modified once he approved it. Which of the following options can be useful to ensure the integrity of the data?

- A. The CFO can use a hash algorithm in the document once he approved the financial statements
- B. The CFO can use an excel file with a password
- C. The financial statements can be sent twice, one by email and the other delivered in USB and the accountant can compare both to be sure is the same document
- D. The document can be sent to the accountant using an exclusive USB for that document

Answer: A

NEW QUESTION 136

There are multiple cloud deployment options depending on how isolated a customer's resources are from those of other customers. Shared environments share the costs and allow each customer to enjoy lower operations expenses. One solution is for a customer to join with a group of users or organizations to share a cloud environment. What is this cloud deployment option called?

- A. Hybrid
- B. Community
- C. Public
- D. Private

Answer: B

Explanation:

The purpose of this idea is to permit multiple customers to figure on joint projects and applications that belong to the community, where it's necessary to possess a centralized clouds infrastructure. In other words, Community Cloud may be a distributed infrastructure that solves the precise problems with business sectors by integrating the services provided by differing types of clouds solutions.

The communities involved in these projects, like tenders, business organizations, and research companies, specialise in similar issues in their cloud interactions. Their shared interests may include concepts and policies associated with security and compliance considerations, and therefore the goals of the project also .

Community Cloud computing facilitates its users to spot and analyze their business demands better. Community Clouds could also be hosted during a data center, owned by one among the tenants, or by a third-party cloud services provider and may be either on-site or off-site.

Community Cloud Examples and Use CasesCloud providers have developed Community Cloud offerings, and a few organizations are already seeing the advantages . the subsequent list shows a number of the most scenarios of the Community Cloud model that's beneficial to the participating organizations.

➤ Multiple governmental departments that perform transactions with each other can have their processing systems on shared infrastructure. This setup makes it cost-effective to the tenants, and may also reduce their data traffic.

Benefits of Community CloudsCommunity Cloud provides benefits to organizations within the community, individually also as collectively. Organizations don't need to worry about the safety concerns linked with Public Cloud due to the closed user group.

This recent cloud computing model has great potential for businesses seeking cost-effective cloud services to collaborate on joint projects, because it comes with multiple advantages.

Openness and ImpartialityCommunity Clouds are open systems, and that they remove the dependency organizations wear cloud service providers. Organizations are able to do many benefits while avoiding the disadvantages of both public and personal clouds.

➤ Ensures compatibility among each of its users, allowing them to switch properties consistent with their individual use cases. They also enable companies to interact with their remote employees and support the utilization of various devices, be it a smartphone or a tablet. This makes this sort of cloud solution more flexible to users' demands.

➤ Consists of a community of users and, as such, is scalable in several aspects like hardware resources, services, and manpower. It takes under consideration demand growth, and you simply need to increase the user-base.

Flexibility and ScalabilityHigh Availability and ReliabilityYour cloud service must be ready to make sure the availability of knowledge and applications in the least times. Community Clouds secure your data within the same way as the other cloud service, by replicating data and applications in multiple secure locations to guard them from unforeseen circumstances.

Cloud possesses redundant infrastructure to form sure data is out there whenever and wherever you would like it. High availability and reliability are critical concerns for any sort of cloud solution.

Security and ComplianceTwo significant concerns discussed when organizations believe cloud computing are data security and compliance with relevant regulatory authorities. Compromising each other's data security isn't profitable to anyone during a Community Cloud.

➤ the power to dam users from editing and downloading specific datasets.

➤ Making sensitive data subject to strict regulations on who has access to Sharing sensitive data unique to a specific organization would bring harm to all or any

the members involved.

➤ What devices can store sensitive data.

Users can configure various levels of security for his or her data. Common use cases: Convenience and Control Conflicts associated with convenience and control don't arise during a Community Cloud. Democracy may be a crucial factor the Community Cloud offers as all tenants share and own the infrastructure and make decisions collaboratively. This setup allows organizations to possess their data closer to them while avoiding the complexities of a personal Cloud.

Less Work for the IT Department Having data, applications, and systems within the cloud means you are doing not need to manage them entirely. This convenience eliminates the necessity for tenants to use extra human resources to manage the system. Even during a self-managed solution, the work is split among the participating organizations.

Environment Sustainability In the Community Cloud, organizations use one platform for all their needs, which dissuades them from investing in separate cloud facilities. This shift introduces a symbiotic relationship between broadening and shrinking the utilization of cloud among clients. With the reduction of organizations using different clouds, resources are used more efficiently, thus resulting in a smaller carbon footprint.

NEW QUESTION 139

Widespread fraud at Enron, WorldCom, and Tyco led to the creation of a law that was designed to improve the accuracy and accountability of corporate disclosures. It covers accounting firms and third parties that provide financial services to some organizations and came into effect in 2002. This law is known by what acronym?

- A. Fed RAMP
- B. PCIDSS
- C. SOX
- D. HIPAA

Answer: C

Explanation:

The Sarbanes-Oxley Act of 2002 could be a law the U.S. Congress passed on July thirty of that year to assist defend investors from fallacious money coverage by companies. Also called the SOX Act of 2002 and also the company Responsibility Act of 2002, it mandated strict reforms to existing securities rules and obligatory powerful new penalties on law breakers.

The Sarbanes-Oxley law Act of 2002 came in response to money scandals within the early 2000s involving in public listed corporations like Enron Corporation, Tyco International plc, and WorldCom. The high-profile frauds cask capitalist confidence within the trustiness of company money statements Associate in Nursing light-emitting diode several to demand an overhaul of decades-old restrictive standards.

NEW QUESTION 144

What is the algorithm used by LM for Windows 2000 SAM?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 149

Which of the following Linux commands will resolve a domain name into IP address?

- A. >host -t a hackeddomain.com
- B. >host -t ns hackeddomain.com
- C. >host -t soa hackeddomain.com
- D. >host -t AXFR hackeddomain.com

Answer: A

NEW QUESTION 150

Alex, a cloud security engineer working in Eyecloud Inc. is tasked with isolating applications from the underlying infrastructure and stimulating communication via well-defined channels. For this purpose, he used an open-source technology that helped him in developing, packaging, and running applications; further, the technology provides PaaS through OS-level visualization, delivers containerized software packages, and promotes fast software delivery. What is the cloud technology employed by Alex in the above scenario?

- A. Virtual machine
- B. Serverless computing
- C. Docker
- D. Zero trust network

Answer: C

NEW QUESTION 155

What kind of detection techniques is being used in antivirus softwares that identifies malware by collecting data from multiple protected systems and instead of analyzing files locally it's made on the premier environment

- A. VCloud based
- B. Honypot based
- C. Behaviour based
- D. Heuristics based

Answer: A

NEW QUESTION 158

Which of the following algorithms can be used to guarantee the integrity of messages being sent, in transit, or stored?

- A. symmetric algorithms
- B. asymmetric algorithms
- C. hashing algorithms
- D. integrity algorithms

Answer: C

NEW QUESTION 162

Clark, a professional hacker, was hired by an organization to gather sensitive information about its competitors surreptitiously. Clark gathers the server IP address of the target organization using Whois footprinting. Further, he entered the server IP address as an input to an online tool to retrieve information such as the network range of the target organization and to identify the network topology and operating system used in the network. What is the online tool employed by Clark in the above scenario?

- A. AOL
- B. ARIN
- C. DuckDuckGo
- D. Baidu

Answer: B

Explanation:

<https://search.arin.net/rdap/?query=199.43.0.43>

NEW QUESTION 166

Gilbert, a web developer, uses a centralized web API to reduce complexity and increase the integrity of updating and changing data. For this purpose, he uses a web service that uses HTTP methods such as PUT, POST, GET, and DELETE and can improve the overall performance, visibility, scalability, reliability, and portability of an application. What is the type of web-service API mentioned in the above scenario?

- A. JSON-RPC
- B. SOAP API
- C. RESTful API
- D. REST API

Answer: C

Explanation:

*REST is not a specification, tool, or framework, but instead is an architectural style for web services that serves as a communication medium between various systems on the web. *RESTful APIs, which are also known as RESTful services, are designed using REST principles and HTTP communication protocols. RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE.

RESTful API: RESTful API is a RESTful service that is designed using REST principles and HTTP communication protocols. RESTful is a collection of resources that use HTTP methods such as PUT, POST, GET, and DELETE. RESTful API is also designed to make applications independent to improve the overall performance, visibility, scalability, reliability, and portability of an application. APIs with the following features can be referred to as RESTful APIs:

- o Stateless: The client end stores the state of the session; the server is restricted to save data during the request processing.
- o Cacheable: The client should save responses (representations) in the cache. This feature can enhance API performance.

pg. 1920 CEHV11 manual.

<https://cloud.google.com/files/apigee/apigee-web-api-design-the-missing-link-ebook.pdf>

The HTTP methods GET, POST, PUT or PATCH, and DELETE can be used with these templates to read, create, update, and delete description resources for dogs and their owners. This API style has become popular for many reasons. It is straightforward and intuitive, and learning this pattern is similar to learning a programming language API. APIs like this one are commonly called RESTful APIs, although they do not display all of the characteristics that define REST (more on REST later).

NEW QUESTION 167

Which Nmap option would you use if you were not concerned about being detected and wanted to perform a very fast scan?

- A. -T5
- B. -O
- C. -T0
- D. -A

Answer: A

NEW QUESTION 168

A network admin contacts you. He is concerned that ARP spoofing or poisoning might occur on his network. What are some things he can do to prevent it? Select the best answers.

- A. Use port security on his switches.
- B. Use a tool like ARPwatch to monitor for strange ARP activity.
- C. Use a firewall between all LAN segments.
- D. If you have a small network, use static ARP entries.
- E. Use only static IP addresses on all PC's.

Answer: ABD

NEW QUESTION 169

In this form of encryption algorithm, every individual block contains 64-bit data, and three keys are used, where each key consists of 56 bits. Which is this encryption algorithm?

- A. IDEA
- B. Triple Data Encryption standard
- C. MDS encryption algorithm
- D. AES

Answer: B

Explanation:

Triple DES is another mode of DES operation. It takes three 64-bit keys, for an overall key length of 192 bits. In Stealth, you merely type within the entire 192-bit (24 character) key instead of entering each of the three keys individually. The Triple DES DLL then breaks the user-provided key into three subkeys, padding the keys if necessary in order that they are each 64 bits long. The procedure for encryption is strictly an equivalent as regular DES, but it's repeated 3 times, hence the name Triple DES. The info is encrypted with the primary key, decrypted with the second key, and eventually encrypted again with the third key. Triple DES runs 3 times slower than DES, but is far safer if used properly. The procedure for decrypting something is that the same because the procedure for encryption, except it's executed in reverse. Like DES, data is encrypted and decrypted in 64-bit chunks. Although the input key for DES is 64 bits long, the particular key employed by DES is merely 56 bits long. The smallest amount significant (right-most) bit in each byte may be a parity, and will be set in order that there are always an odd number of 1s in every byte. These parity bits are ignored, so only the seven most vital bits of every byte are used, leading to a key length of 56 bits. This suggests that the effective key strength for Triple DES is really 168 bits because each of the three keys contains 8 parity bits that aren't used during the encryption process.

Triple DES Modes

- Triple ECB (Electronic Code Book)**• This variant of Triple DES works precisely the same way because the ECB mode of DES. • this is often the foremost commonly used mode of operation.
- Triple CBC (Cipher Block Chaining)**• This method is extremely almost like the quality DES CBC mode. • like Triple ECB, the effective key length is 168 bits and keys are utilized in an equivalent manner, as described above, but the chaining features of CBC mode also are employed. • the primary 64-bit key acts because the Initialization Vector to DES. • Triple ECB is then executed for one 64-bit block of plaintext. • The resulting ciphertext is then XORed with subsequent plaintext block to be encrypted, and therefore the procedure is repeated. • This method adds an additional layer of security to Triple DES and is therefore safer than Triple ECB, although it's not used as widely as Triple ECB.

NEW QUESTION 170

Which method of password cracking takes the most time and effort?

- A. Dictionary attack
- B. Shoulder surfing
- C. Rainbow tables
- D. Brute force

Answer: D

NEW QUESTION 171

What useful information is gathered during a successful Simple Mail Transfer Protocol (SMTP) enumeration?

- A. The two internal commands VRFY and EXPN provide a confirmation of valid users, email addresses, aliases, and mailing lists.
- B. Reveals the daily outgoing message limits before mailboxes are locked
- C. The internal command RCPT provides a list of ports open to message traffic.
- D. A list of all mail proxy server addresses used by the targeted host

Answer: A

NEW QUESTION 173

This kind of password cracking method uses word lists in combination with numbers and special characters:

- A. Hybrid
- B. Linear
- C. Symmetric
- D. Brute Force

Answer: A

NEW QUESTION 177

Which of the following steps for risk assessment methodology refers to vulnerability identification?

- A. Determines if any flaws exist in systems, policies, or procedures
- B. Assigns values to risk probabilities; Impact values.
- C. Determines risk probability that vulnerability will be exploited (High)
- D. Medium, Low)
- E. Identifies sources of harm to an IT system
- F. (Natural, Human)
- G. Environmental)

Answer: C

NEW QUESTION 180

Security administrator John Smith has noticed abnormal amounts of traffic coming from local computers at night. Upon reviewing, he finds that user data have been exfiltrated by an attacker. AV tools are unable to find any malicious software, and the IDS/IPS has not reported on any non-whitelisted programs, what type of malware did the attacker use to bypass the company's application whitelisting?

- A. Phishing malware
- B. Zero-day malware
- C. File-less malware
- D. Logic bomb malware

Answer: C

Explanation:

<https://www.mcafee.com/enterprise/en-us/security-awareness/ransomware/what-is-fileless-malware.html>

NEW QUESTION 183

Why is a penetration test considered to be more thorough than vulnerability scan?

- A. Vulnerability scans only do host discovery and port scanning by default.
- B. A penetration test actively exploits vulnerabilities in the targeted infrastructure, while a vulnerability scan does not typically involve active exploitation.
- C. It is not – a penetration test is often performed by an automated tool, while a vulnerability scan requires active engagement.
- D. The tools used by penetration testers tend to have much more comprehensive vulnerability databases.

Answer: B

NEW QUESTION 188

You are attempting to crack LM Manager hashed from Windows 2000 SAM file. You will be using LM Brute force hacking tool for decryption. What encryption algorithm will you be decrypting?

- A. MD4
- B. DES
- C. SHA
- D. SSL

Answer: B

NEW QUESTION 189

The Heartbleed bug was discovered in 2014 and is widely referred to under MITRE's Common Vulnerabilities and Exposures (CVE) as CVE-2014-0160. This bug affects the OpenSSL implementation of the Transport Layer Security (TLS) protocols defined in RFC6520.

What type of key does this bug leave exposed to the Internet making exploitation of any compromised system very easy?

- A. Public
- B. Private
- C. Shared
- D. Root

Answer: B

NEW QUESTION 194

Which of the following tools performs comprehensive tests against web servers, including dangerous files and CGIs?

- A. Nikto
- B. John the Ripper
- C. Dsniff
- D. Snort

Answer: A

NEW QUESTION 199

MX record priority increases as the number increases. (True/False.)

- A. True
- B. False

Answer: B

NEW QUESTION 202

What is the main security service a cryptographic hash provides?

- A. Integrity and ease of computation
- B. Message authentication and collision resistance
- C. Integrity and collision resistance
- D. Integrity and computational in-feasibility

Answer: D

NEW QUESTION 207

Matthew, a black hat, has managed to open a meterpreter session to one of the kiosk machines in Evil Corp's lobby. He checks his current SID, which is S-1-5-21-1223352397-1872883824-861252104-501. What needs to happen before Matthew has full administrator access?

- A. He must perform privilege escalation.
- B. He needs to disable antivirus protection.
- C. He needs to gain physical access.
- D. He already has admin privileges, as shown by the "501" at the end of the SID.

Answer: A

NEW QUESTION 212

Which tool can be used to silently copy files from USB devices?

- A. USB Grabber
- B. USB Snoopy
- C. USB Sniffer
- D. Use Dumper

Answer: D

NEW QUESTION 213

Which of the following are well known password-cracking programs?

- A. L0phtcrack
- B. NetCat
- C. Jack the Ripper
- D. Netbus
- E. John the Ripper

Answer: AE

NEW QUESTION 214

Which mode of IPSec should you use to assure security and confidentiality of data within the same LAN?

- A. ESP transport mode
- B. ESP confidential
- C. AH permiscuous
- D. AH Tunnel mode

Answer: A

NEW QUESTION 217

What ports should be blocked on the firewall to prevent NetBIOS traffic from not coming through the firewall if your network is comprised of Windows NT, 2000, and XP?

- A. 110
- B. 135
- C. 139
- D. 161
- E. 445
- F. 1024

Answer: BCE

NEW QUESTION 218

Which of the following is an extremely common IDS evasion technique in the web world?

- A. Spyware
- B. Subnetting
- C. Unicode Characters
- D. Port Knocking

Answer: C

NEW QUESTION 221

Which of the following is the best countermeasure to encrypting ransomwares?

- A. Use multiple antivirus softwares
- B. Pay a ransom
- C. Keep some generation of off-line backup
- D. Analyze the ransomware to get decryption key of encrypted data

Answer: C

NEW QUESTION 223

A penetration tester is conducting a port scan on a specific host. The tester found several ports opened that were confusing in concluding the Operating System (OS) version installed. Considering that NMAP result below, which of the following is likely to be installed on the target machine by the OS? Starting NMAP 5.21 at 2011-03-15 11:06 NMAP scan report for 172.16.40.65 Host is up (1.00s latency). Not shown: 993 closed ports PORT STATE SERVICE 21/tcp open ftp 23/tcp open telnet 80/tcp open http 139/tcp open netbios-ssn 515/tcp open 631/tcp open ipp 9100/tcp open MAC Address: 00:00:48:0D:EE:8

- A. The host is likely a Linux machine.
- B. The host is likely a printer.
- C. The host is likely a router.
- D. The host is likely a Windows machine.

Answer: B

NEW QUESTION 226

BitLocker encryption has been implemented for all the Windows-based computers in an organization. You are concerned that someone might lose their cryptographic key. Therefore, a mechanism was implemented to recover the keys from Active Directory. What is this mechanism called in cryptography?

- A. Key archival
- B. Key escrow.
- C. Certificate rollover
- D. Key renewal

Answer: B

NEW QUESTION 230

Becky has been hired by a client from Dubai to perform a penetration test against one of their remote offices. Working from her location in Columbus, Ohio, Becky runs her usual reconnaissance scans to obtain basic information about their network. When analyzing the results of her Whois search, Becky notices that the IP was allocated to a location in Le Havre, France. Which regional Internet registry should Becky go to for detailed information?

- A. ARIN
- B. APNIC
- C. RIPE
- D. LACNIC

Answer: C

Explanation:

Regional Internet Registries (RIRs):

ARIN (American Registry for Internet Numbers) AFRINIC (African Network Information Center) APNIC (Asia Pacific Network Information Center)

RIPE (Réseaux IP Européens Network Coordination Centre)

LACNIC (Latin American and Caribbean Network Information Center)

NEW QUESTION 232

Bob, a network administrator at BigUniversity, realized that some students are connecting their notebooks in the wired network to have Internet access. In the university campus, there are many Ethernet ports available for professors and authorized visitors but not for students. He identified this when the IDS alerted for malware activities in the network. What should Bob do to avoid this problem?

- A. Disable unused ports in the switches
- B. Separate students in a different VLAN
- C. Use the 802.1x protocol
- D. Ask students to use the wireless network

Answer: C

NEW QUESTION 236

Henry is a penetration tester who works for XYZ organization. While performing enumeration on a client organization, he queries the DNS server for a specific cached DNS record. Further, by using this cached record, he determines the sites recently visited by the organization's user. What is the enumeration technique used by Henry on the organization?

- A. DNS zone walking
- B. DNS cache snooping
- C. DNS SEC zone walking
- D. DNS cache poisoning

Answer: B

NEW QUESTION 239

Peter is surfing the internet looking for information about DX Company. Which hacking process is Peter doing?

- A. Scanning
- B. Footprinting
- C. Enumeration
- D. System Hacking

Answer: B

NEW QUESTION 242

What is one of the advantages of using both symmetric and asymmetric cryptography in SSL/TLS?

- A. Symmetric algorithms such as AES provide a failsafe when asymmetric methods fail.
- B. Asymmetric cryptography is computationally expensive in compariso
- C. However, it is well-suited to securely negotiate keys for use with symmetric cryptography.
- D. Symmetric encryption allows the server to securely transmit the session keys out-of-band.
- E. Supporting both types of algorithms allows less-powerful devices such as mobile phones to use symmetric encryption instead.

Answer: D

NEW QUESTION 245

Bob was recently hired by a medical company after it experienced a major cyber security breach. Many patients are complaining that their personal medical records are fully exposed on the Internet and someone can find them with a simple Google search. Bob's boss is very worried because of regulations that protect those data. Which of the following regulations is mostly violated?

- A. HIPPA/PHI
- B. PII
- C. PCIDSS
- D. ISO 2002

Answer: A

Explanation:

PHI stands for Protected Health info. The HIPAA Privacy Rule provides federal protections for private health info held by lined entities and provides patients an array of rights with regard to that info. under HIPAA phi is considered to be any identifiable health info that's used, maintained, stored, or transmitted by a HIPAA-covered entity – a healthcare provider, health plan or health insurer, or a aid clearinghouse – or a business associate of a HIPAA-covered entity, in relation to the availability of aid or payment for aid services.

It is not only past and current medical info that's considered letter under HIPAA Rules, however also future info concerning medical conditions or physical and mental health related to the provision of care or payment for care. phi is health info in any kind, together with physical records, electronic records, or spoken info. Therefore, letter includes health records, medical histories, lab check results, and medical bills. basically, all health info is considered letter once it includes individual identifiers. Demographic info is additionally thought of phi underneath HIPAA Rules, as square measure several common identifiers like patient names, Social Security numbers, Driver's license numbers, insurance details, and birth dates, once they square measure connected with health info.

The eighteen identifiers that create health info letter are:

- Names
- Dates, except year
- phonephone numbers
- Geographic information
- FAX numbers
- Social Security numbers
- Email addresses
- case history numbers
- Account numbers
- Health arrange beneficiary numbers
- Certificate/license numbers
- Vehicle identifiers and serial numbers together with license plates
- Web URLs
- Device identifiers and serial numbers
- net protocol addresses
- Full face photos and comparable pictures
- Biometric identifiers (i.e. retinal scan, fingerprints)
- Any distinctive identifying variety or code

One or a lot of of those identifiers turns health info into letter, and phi HIPAA Privacy Rule restrictions can then apply that limit uses and disclosures of the data. HIPAA lined entities and their business associates will ought to guarantee applicable technical, physical, and body safeguards are enforced to make sure the confidentiality, integrity, and availability of phi as stipulated within the HIPAA Security Rule.

NEW QUESTION 247

Louis, a professional hacker, had used specialized tools or search engines to encrypt all his browsing activity and navigate anonymously to obtain sensitive/hidden information about official government or federal databases. After gathering the Information, he successfully performed an attack on the target government organization without being traced. Which of the following techniques is described in the above scenario?

- A. Dark web footprinting
- B. VolP footpnnting
- C. VPN footprinting
- D. website footprinting

Answer: A

Explanation:

The deep web is the layer of the online cyberspace that consists of web pages and content that are hidden and unindexed.

NEW QUESTION 250

Jim's company regularly performs backups of their critical servers. But the company cannot afford to send backup tapes to an off-site vendor for long-term storage and archiving. Instead, Jim's company keeps the backup tapes in a safe in the office. Jim's company is audited each year, and the results from this year's audit show a risk because backup tapes are not stored off-site. The Manager of Information Technology has a plan to take the backup tapes home with him and wants to know what two things he can do to secure the backup tapes while in transit?

- A. Encrypt the backup tapes and transport them in a lock box.
- B. Degauss the backup tapes and transport them in a lock box.
- C. Hash the backup tapes and transport them in a lock box.
- D. Encrypt the backup tapes and use a courier to transport them.

Answer: A

NEW QUESTION 251

Ben purchased a new smartphone and received some updates on it through the OTA method. He received two messages: one with a PIN from the network

operator and another asking him to enter the PIN received from the operator. As soon as he entered the PIN, the smartphone started functioning in an abnormal manner. What is the type of attack performed on Ben in the above scenario?

- A. Advanced SMS phishing
- B. Bypass SSL pinning
- C. Phishing
- D. Tap 'n ghost attack

Answer: A

NEW QUESTION 256

George is a security professional working for iTech Solutions. He was tasked with securely transferring sensitive data of the organization between industrial systems. In this process, he used a short-range communication protocol based on the IEEE 802.15.4 standard. This protocol is used in devices that transfer data infrequently at a low rate in a restricted area, within a range of 10-100 m. What is the short-range wireless communication technology George employed in the above scenario?

- A. MQTT
- B. LPWAN
- C. Zigbee
- D. NB-IoT

Answer: C

Explanation:

Zigbee could be a wireless technology developed as associate open international normal to deal with the unique desires of affordable, low-power wireless IoT networks. The Zigbee normal operates on the IEEE 802.15.4 physical radio specification and operates in unauthorised bands as well as a pair of 4 GHz, 900 MHz and 868 MHz.

The 802.15.4 specification upon that the Zigbee stack operates gained confirmation by the Institute of Electrical and physical science Engineers (IEEE) in 2003.

The specification could be a packet-based radio protocol supposed for affordable, battery-operated devices. The protocol permits devices to speak in an exceedingly kind of network topologies and may have battery life lasting many years.

The Zigbee three.0 Protocol

The Zigbee protocol has been created and ratified by member corporations of the Zigbee Alliance. Over three hundred leading semiconductor makers, technology corporations, OEMs and repair corporations comprise the Zigbee Alliance membership. The Zigbee protocol was designed to supply associate easy-to-use wireless information answer characterised by secure, reliable wireless network architectures.

THE ZIGBEE ADVANTAGE

The Zigbee 3.0 protocol is intended to speak information through rip-roaring RF environments that area unit common in business and industrial applications.

Version 3.0 builds on the prevailing Zigbee normal however unifies the market-specific application profiles to permit all devices to be wirelessly connected within the same network, no matter their market designation and performance. what is more, a Zigbee 3.0 certification theme ensures the ability of product from completely different makers. Connecting Zigbee three.0 networks to the information science domain unveil observance and management from devices like smartphones and tablets on a local area network or WAN, as well as the web, and brings verity net of Things to fruition.

Zigbee protocol options include:

- Support for multiple network topologies like point-to-point, point-to-multipoint and mesh networks
- Low duty cycle – provides long battery life
- Low latency
- Direct Sequence spread Spectrum (DSSS)
- Up to 65,000 nodes per network
- 128-bit AES encryption for secure information connections
- Collision avoidance, retries and acknowledgements

This is another short-range communication protocol based on the IEEE 802.15.4 standard. Zig-Bee is used in devices that transfer data infrequently at a low rate in a restricted area and within a range of 10–100 m.

NEW QUESTION 257

You have successfully comprised a server having an IP address of 10.10.0.5. You would like to enumerate all machines in the same network quickly.

What is the best Nmap command you will use?

- A. nmap -T4 -q 10.10.0.0/24
- B. nmap -T4 -F 10.10.0.0/24
- C. nmap -T4 -r 10.10.1.0/24
- D. nmap -T4 -O 10.10.0.0/24

Answer: B

NEW QUESTION 258

Morris, an attacker, wanted to check whether the target AP is in a locked state. He attempted using different utilities to identify WPS-enabled APs in the target wireless network. Ultimately, he succeeded with one special command-line utility. Which of the following command-line utilities allowed Morris to discover the WPS-enabled APs?

- A. wash
- B. ntptrace
- C. macof
- D. net View

Answer: A

NEW QUESTION 259

In an attempt to increase the security of your network, you implement a solution that will help keep your wireless network undiscoverable and accessible only to

those that know it. How do you accomplish this?

- A. Delete the wireless network
- B. Remove all passwords
- C. Lock all users
- D. Disable SSID broadcasting

Answer: D

NEW QUESTION 260

You are a security officer of a company. You had an alert from IDS that indicates that one PC on your Intranet is connected to a blacklisted IP address (C2 Server) on the Internet. The IP address was blacklisted just before the alert. You are starting an investigation to roughly analyze the severity of the situation. Which of the following is appropriate to analyze?

- A. IDS log
- B. Event logs on domain controller
- C. Internet Firewall/Proxy log.
- D. Event logs on the PC

Answer: C

NEW QUESTION 262

These hackers have limited or no training and know how to use only basic techniques or tools. What kind of hackers are we talking about?

- A. Black-Hat Hackers A
- B. Script Kiddies
- C. White-Hat Hackers
- D. Gray-Hat Hacker

Answer: B

Explanation:

Script Kiddies: These hackers have limited or no training and know how to use only basic techniques or tools. Even then they may not understand any or all of what they are doing.

NEW QUESTION 263

Boney, a professional hacker, targets an organization for financial benefits. He performs an attack by sending his session ID using an MITM attack technique. Boney first obtains a valid session ID by logging into a service and later feeds the same session ID to the target employee. The session ID links the target employee to Boney's account page without disclosing any information to the victim. When the target employee clicks on the link, all the sensitive payment details entered in a form are linked to Boney's account. What is the attack performed by Boney in the above scenario?

- A. Session donation attack
- B. Session fixation attack
- C. Forbidden attack
- D. CRIME attack

Answer: A

Explanation:

In a session donation attack, the attacker donates their own session ID to the target user. In this attack, the attacker first obtains a valid session ID by logging into a service and later feeds the same session ID to the target user. This session ID links a target user to the attacker's account page without disclosing any information to the victim. When the target user clicks on the link and enters the details (username, password, payment details, etc.) in a form, the entered details are linked to the attacker's account. To initiate this attack, the attacker can send their session ID using techniques such as cross-site cooking, an MITM attack, and session fixation. A session donation attack involves the following steps.

NEW QUESTION 264

A new wireless client is configured to join a 802.11 network. This client uses the same hardware and software as many of the other clients on the network. The client can see the network, but cannot connect. A wireless packet sniffer shows that the Wireless Access Point (WAP) is not responding to the association requests being sent by the wireless client. What is a possible source of this problem?

- A. The WAP does not recognize the client's MAC address
- B. The client cannot see the SSID of the wireless network
- C. Client is configured for the wrong channel
- D. The wireless client is not configured to use DHCP

Answer: A

NEW QUESTION 267

What is the role of test automation in security testing?

- A. It is an option but it tends to be very expensive.
- B. It should be used exclusively.
- C. Manual testing is outdated because of low speed and possible test setup inconsistencies.
- D. Test automation is not usable in security due to the complexity of the tests.
- E. It can accelerate benchmark tests and repeat them with a consistent test setup.
- F. But it cannot replace manual testing completely.

Answer: D

NEW QUESTION 268

If a token and 4-digit personal identification number (PIN) are used to access a computer system and the token performs off-line checking for the correct PIN, what type of attack is possible?

- A. Birthday
- B. Brute force
- C. Man-in-the-middle
- D. Smurf

Answer: B

NEW QUESTION 270

Joel, a professional hacker, targeted a company and identified the types of websites frequently visited by its employees. Using this information, he searched for possible loopholes in these websites and injected a malicious script that can redirect users from the web page and download malware onto a victim's machine. Joel waits for the victim to access the infected web application so as to compromise the victim's machine. Which of the following techniques is used by Joel in the above scenario?

- A. DNS rebinding attack
- B. Clickjacking attack
- C. MarioNet attack
- D. Watering hole attack

Answer: B

NEW QUESTION 275

Which of the following is a low-tech way of gaining unauthorized access to systems?

- A. Social Engineering
- B. Eavesdropping
- C. Scanning
- D. Sniffing

Answer: A

NEW QUESTION 278

In the field of cryptanalysis, what is meant by a "rubber-hose" attack?

- A. Attempting to decrypt cipher text by making logical assumptions about the contents of the original plain text.
- B. Extraction of cryptographic secrets through coercion or torture.
- C. Forcing the targeted key stream through a hardware-accelerated device such as an ASIC.
- D. A backdoor placed into a cryptographic algorithm by its creator.

Answer: B

NEW QUESTION 280

You are trying to break into a highly classified top-secret mainframe computer with highest security system in place at Merclyn Barley Bank located in Los Angeles. You know that conventional hacking doesn't work in this case, because organizations such as banks are generally tight and secure when it comes to protecting their systems.

In other words, you are trying to penetrate an otherwise impenetrable system. How would you proceed?

- A. Look for "zero-day" exploits at various underground hacker websites in Russia and China and buy the necessary exploits from these hackers and target the bank's network
- B. Try to hang around the local pubs or restaurants near the bank, get talking to a poorly-paid or disgruntled employee, and offer them money if they'll abuse their access privileges by providing you with sensitive information
- C. Launch DDOS attacks against Merclyn Barley Bank's routers and firewall systems using 100, 000 or more "zombies" and "bots"
- D. Try to conduct Man-in-the-Middle (MiTM) attack and divert the network traffic going to the Merclyn Barley Bank's Webserver to that of your machine using DNS Cache Poisoning techniques

Answer: B

NEW QUESTION 285

which type of virus can change its own code and then cipher itself multiple times as it replicates?

- A. Stealth virus
- B. Tunneling virus
- C. Cavity virus
- D. Encryption virus

Answer: A

Explanation:

A stealth virus may be a sort of virus malware that contains sophisticated means of avoiding detection by antivirus software. After it manages to urge into the now-infected machine a stealth viruses hides itself by continually renaming and moving itself round the disc. Like other viruses, a stealth virus can take hold of the many parts of one's PC. When taking control of the PC and performing tasks, antivirus programs can detect it, but a stealth virus sees that coming and can rename then copy itself to a special drive or area on the disc, before the antivirus software. Once moved and renamed a stealth virus will usually replace the detected 'infected' file with a clean file that doesn't trigger anti-virus detection. It's a never-ending game of cat and mouse. The intelligent architecture of this sort of virus about guarantees it's impossible to completely rid oneself of it once infected. One would need to completely wipe the pc and rebuild it from scratch to completely

eradicate the presence of a stealth virus. Using regularly-updated antivirus software can reduce risk, but, as we all know, antivirus software is additionally caught in an endless cycle of finding new threats and protecting against them.
<https://www.techslang.com/definition/what-is-a-stealth-virus/>

NEW QUESTION 289

You work for Acme Corporation as Sales Manager. The company has tight network security restrictions. You are trying to steal data from the company's Sales database (Sales.xls) and transfer them to your home computer. Your company filters and monitors traffic that leaves from the internal network to the Internet. How will you achieve this without raising suspicion?

- A. Encrypt the Sales.xls using PGP and e-mail it to your personal gmail account
- B. Package the Sales.xls using Trojan wrappers and telnet them back your home computer
- C. You can conceal the Sales.xls database in another file like photo.jpg or other files and send it out in an innocent looking email or file transfer using Steganography techniques
- D. Change the extension of Sales.xls to sales.txt and upload them as attachment to your hotmail account

Answer: C

NEW QUESTION 290

Which utility will tell you in real time which ports are listening or in another state?

- A. Netstat
- B. TCPView
- C. Nmap
- D. Loki

Answer: B

NEW QUESTION 293

Shellshock allowed an unauthorized user to gain access to a server. It affected many Internet-facing services, which OS did it not directly affect?

- A. Linux
- B. Unix
- C. OS X
- D. Windows

Answer: D

NEW QUESTION 297

You are working as a Security Analyst in a company XYZ that owns the whole subnet range of 23.0.0.0/8 and 192.168.0.0/8. While monitoring the data, you find a high number of outbound connections. You see that IP's owned by XYZ (Internal) and private IP's are communicating to a Single Public IP. Therefore, the Internal IP's are sending data to the Public IP. After further analysis, you find out that this Public IP is a blacklisted IP, and the internal communicating devices are compromised. What kind of attack does the above scenario depict?

- A. Botnet Attack
- B. Spear Phishing Attack
- C. Advanced Persistent Threats
- D. Rootkit Attack

Answer: A

NEW QUESTION 301

An attacker redirects the victim to malicious websites by sending them a malicious link by email. The link appears authentic but redirects the victim to a malicious web page, which allows the attacker to steal the victim's data. What type of attack is this?

- A. Phishing
- B. Vishing
- C. Spoofing
- D. DDoS

Answer: A

NEW QUESTION 305

Clark, a professional hacker, attempted to perform a Btlejacking attack using an automated tool, Btlejack, and hardware tool, micro:bit. This attack allowed Clark to hijack, read, and export sensitive information shared between connected devices. To perform this attack, Clark executed various btlejack commands. Which of the following commands was used by Clark to hijack the connections?

- A. btlejack-f 0x129f3244-j
- B. btlejack -c any
- C. btlejack -d /dev/ttyACM0 -d /dev/ttyACM2 -s
- D. btlejack -f 0x9c68fd30 -t -m 0x1 ffffffff

Answer: D

NEW QUESTION 310

The collection of potentially actionable, overt, and publicly available information is known as

- A. Open-source intelligence
- B. Real intelligence
- C. Social intelligence
- D. Human intelligence

Answer: A

NEW QUESTION 315

What information security law or standard aims at protecting stakeholders and the general public from accounting errors and fraudulent activities within organizations?

- A. PCI-DSS
- B. FISMA
- C. SOX
- D. ISO/IEC 27001:2013

Answer: C

NEW QUESTION 318

What type of a vulnerability/attack is it when the malicious person forces the user's browser to send an authenticated request to a server?

- A. Session hijacking
- B. Server side request forgery
- C. Cross-site request forgery
- D. Cross-site scripting

Answer: C

NEW QUESTION 323

Firewalk has just completed the second phase (the scanning phase) and a technician receives the output shown below. What conclusions can be drawn based on these scan results?

TCP port 21 no response
TCP port 22 no response
TCP port 23 Time-to-live exceeded

- A. The lack of response from ports 21 and 22 indicate that those services are not running on the destination server
- B. The scan on port 23 was able to make a connection to the destination host prompting the firewall to respond with a TTL error
- C. The scan on port 23 passed through the filtering device
- D. This indicates that port 23 was not blocked at the firewall
- E. The firewall itself is blocking ports 21 through 23 and a service is listening on port 23 of the target host

Answer: C

NEW QUESTION 324

DNS cache snooping is a process of determining if the specified resource address is present in the DNS cache records. It may be useful during the examination of the network to determine what software update resources are used, thus discovering what software is installed. What command is used to determine if the entry is present in DNS cache?

- A. nslookup -fullrecursive update.antivirus.com
- B. dnsnoping -rt update.antivirus.com
- C. nslookup -norecursive update.antivirus.com
- D. dns --snoop update.antivirus.com

Answer: C

NEW QUESTION 328

Which of the following types of SQL injection attacks extends the results returned by the original query, enabling attackers to run two or more statements if they have the same structure as the original one?

- A. Error-based injection
- B. Boolean-based blind SQL injection
- C. Blind SQL injection
- D. Union SQL injection

Answer: D

NEW QUESTION 332

Fingerprinting an Operating System helps a cracker because:

- A. It defines exactly what software you have installed
- B. It opens a security-delayed window based on the port being scanned
- C. It doesn't depend on the patches that have been applied to fix existing security holes
- D. It informs the cracker of which vulnerabilities he may be able to exploit on your system

Answer: D

NEW QUESTION 335

By using a smart card and pin, you are using a two-factor authentication that satisfies

- A. Something you are and something you remember
- B. Something you have and something you know
- C. Something you know and something you are
- D. Something you have and something you are

Answer: B

NEW QUESTION 340

Robert, a professional hacker, is attempting to execute a fault injection attack on a target IoT device. In this process, he injects faults into the power supply that can be used for remote execution, also causing the skipping of key instructions. He also injects faults into the clock network used for delivering a synchronized signal across the chip.

Which of the following types of fault injection attack is performed by Robert in the above scenario?

- A. Frequency/voltage tampering
- B. Optical, electromagnetic fault injection (EMFI)
- C. Temperature attack
- D. Power/clock/reset glitching

Answer: D

Explanation:

These types of attacks occur when faults or glitches are INJECTED into the Power supply that can be used for remote execution.

NEW QUESTION 344

You receive an e-mail like the one shown below. When you click on the link contained in the mail, you are redirected to a website seeking you to download free Anti-Virus software.

Dear valued customers,

We are pleased to announce the newest version of Antivirus 2010 for Windows which will probe you with total security against the latest spyware, malware, viruses, Trojans and other online threats. Simply visit the link below and enter your antivirus code:

```
Antivirus code: 5014
http://www.juggyboy/virus/virus.html
Thank you for choosing us, the worldwide leader Antivirus solutions.
Mike Robertson
PDF Reader Support
Copyright Antivirus 2010 ?All rights reserved
If you want to stop receiving mail, please go to:
http://www.juggyboy.com
```

or you may contact us at the following address: Media Internet Consultants, Edif. Neptuno, Planta

Baja, Ave. Ricardo J. Alfaro, Tumba Muerto, n/a Panama

How will you determine if this is Real Anti-Virus or Fake Anti-Virus website?

- A. Look at the website design, if it looks professional then it is a Real Anti-Virus website
- B. Connect to the site using SSL, if you are successful then the website is genuine
- C. Search using the URL and Anti-Virus product name into Google and lookout for suspicious warnings against this site
- D. Download and install Anti-Virus software from this suspicious looking site, your Windows 7 will prompt you and stop the installation if the downloaded file is a malware
- E. Download and install Anti-Virus software from this suspicious looking site, your Windows 7 will prompt you and stop the installation if the downloaded file is a malware

Answer: C

NEW QUESTION 345

Ralph, a professional hacker, targeted Jane, who had recently bought new systems for her company. After a few days, Ralph contacted Jane while masquerading as a legitimate customer support executive, informing that her systems need to be serviced for proper functioning and that customer support will send a computer technician. Jane promptly replied positively. Ralph entered Jane's company using this opportunity and gathered sensitive information by scanning terminals for passwords, searching for important documents in desks, and rummaging bins. What is the type of attack technique Ralph used on Jane?

- A. Dumpster diving
- B. Eavesdropping
- C. Shoulder surfing
- D. impersonation

Answer: D

NEW QUESTION 350

A "Server-Side Includes" attack refers to the exploitation of a web application by injecting scripts in HTML pages or executing arbitrary code remotely.

Which web-page file type, if it exists on the web server, is a strong indication that the server is vulnerable to this kind of attack?

- A. .stm
- B. .html
- C. .rss
- D. .cms

Answer: A

NEW QUESTION 353

James is working as an ethical hacker at Technix Solutions. The management ordered James to discover how vulnerable its network is towards footprinting attacks. James took the help of an open-source framework for performing automated reconnaissance activities. This framework helped James in gathering information using free tools and resources. What is the framework used by James to conduct footprinting and reconnaissance activities?

- A. WebSploit Framework
- B. Browser Exploitation Framework
- C. OSINT framework
- D. SpeedPhish Framework

Answer: C

NEW QUESTION 358

What is the file that determines the basic configuration (specifically activities, services, broadcast receivers, etc.) in an Android application?

- A. AndroidManifest.xml
- B. APK.info
- C. resources.asrc
- D. classes.dex

Answer: A

Explanation:

The AndroidManifest.xml file contains information of your package, including components of the appliance like activities, services, broadcast receivers, content providers etc. It performs another tasks also:• it's responsible to guard the appliance to access any protected parts by providing the permissions. • It also declares the android api that the appliance goes to use. • It lists the instrumentation classes. The instrumentation classes provides profiling and other informations. These informations are removed just before the appliance is published etc. This is the specified xml file for all the android application and located inside the basis directory.

NEW QUESTION 362

Sophia is a shopping enthusiast who spends significant time searching for trendy outfits online. Clark, an attacker, noticed her activities several times and sent a fake email containing a deceptive page link to her social media page displaying all-new and trendy outfits. In excitement, Sophia clicked on the malicious link and logged in to that page using her valid credentials. Which of the following tools is employed by Clark to create the spoofed email?

- A. PyLoris
- B. Slowloris
- C. Evilginx
- D. PLCinject

Answer: C

NEW QUESTION 367

Which of the following is the least-likely physical characteristic to be used in biometric control that supports a large company?

- A. Iris patterns
- B. Voice
- C. Height and Weight
- D. Fingerprints

Answer: C

NEW QUESTION 368

Why would you consider sending an email to an address that you know does not exist within the company you are performing a Penetration Test for?

- A. To determine who is the holder of the root account
- B. To perform a DoS
- C. To create needless SPAM
- D. To illicit a response back that will reveal information about email servers and how they treat undeliverable mail
- E. To test for virus protection

Answer: D

NEW QUESTION 372

An organization has automated the operation of critical infrastructure from a remote location. For this purpose, all the industrial control systems are connected to the Internet. To empower the manufacturing process, ensure the reliability of industrial networks, and reduce downtime and service disruption, the organization decided to install an OT security tool that further protects against security incidents such as cyber espionage, zero-day attacks, and malware. Which of the following tools must the organization employ to protect its critical infrastructure?

- A. Robotium
- B. BalenaCloud
- C. Flowmon
- D. IntentFuzzer

Answer: C

Explanation:

Source: <https://www.flowmon.com>

Flowmon empowers manufacturers and utility companies to ensure the reliability of their industrial networks confidently to avoid downtime and disruption of service continuity. This can be achieved by continuous monitoring and anomaly detection so that malfunctioning devices or security incidents, such as cyber espionage, zero-days, or malware, can be reported and remedied as quickly as possible.

NEW QUESTION 377

A computer science student needs to fill some information into a secured Adobe PDF job application that was received from a prospective employer. Instead of requesting a new document that allowed the forms to be completed, the student decides to write a script that pulls passwords from a list of commonly used passwords to try against the secured PDF until the correct password is found or the list is exhausted.

Which cryptography attack is the student attempting?

- A. Man-in-the-middle attack
- B. Brute-force attack
- C. Dictionary attack
- D. Session hijacking

Answer: C

NEW QUESTION 380

what is the port to block first in case you are suspicious that an IoT device has been compromised?

- A. 22
- B. 443
- C. 48101
- D. 80

Answer: C

Explanation:

TCP port 48101 uses the Transmission management Protocol. transmission control protocol is one in all the most protocols in TCP/IP networks. transmission control protocol could be a connection-oriented protocol, it needs acknowledgement to line up end-to-end communications. only a association is about up user's knowledge may be sent bi-directionally over the association.

Attention! transmission control protocol guarantees delivery of knowledge packets on port 48101 within the same order during which they were sent. bonded communication over transmission control protocol port 48101 is that the main distinction between transmission control protocol and UDP. UDP port 48101 wouldn't have bonded communication as transmission control protocol.

UDP on port 48101 provides Associate in Nursing unreliable service and datagrams might arrive duplicated, out of order, or missing unexpectedly. UDP on port 48101 thinks that error checking and correction isn't necessary or performed within the application, avoiding the overhead of such process at the network interface level.

UDP (User Datagram Protocol) could be a borderline message-oriented Transport Layer protocol (protocol is documented in IETF RFC 768).

Application examples that always use UDP: vocalisation IP (VoIP), streaming media and period multiplayer games. several internet applications use UDP, e.g. the name System (DNS), the Routing info Protocol (RIP), the Dynamic Host Configuration Protocol (DHCP), the straightforward Network Management Protocol (SNMP).

NEW QUESTION 384

Ethical backer jane Doe is attempting to crack the password of the head of the it department of ABC company. She Is utilizing a rainbow table and notices upon entering a password that extra characters are added to the password after submitting. What countermeasure is the company using to protect against rainbow tables?

- A. Password key hashing
- B. Password salting
- C. Password hashing
- D. Account lockout

Answer: B

Explanation:

Passwords are usually delineated as "hashed and salted". salting is simply the addition of a unique, random string of characters renowned solely to the site to every parole before it's hashed, typically this "salt" is placed in front of each password.

The salt value needs to be hold on by the site, which means typically sites use the same salt for each parole. This makes it less effective than if individual salts are used.

The use of unique salts means that common passwords shared by multiple users – like "123456" or "password" – aren't revealed revealed when one such hashed password is known – because despite the passwords being the same the immediately and hashed values are not.

Large salts also protect against certain methods of attack on hashes, including rainbow tables or logs of hashed passwords previously broken.

Both hashing and salting may be repeated more than once to increase the issue in breaking the security.

NEW QUESTION 389

Which type of malware spreads from one system to another or from one network to another and causes similar types of damage as viruses do to the infected system?

- A. Rootkit
- B. Trojan
- C. Worm
- D. Adware

Answer: C

NEW QUESTION 394

Identify the UDP port that Network Time Protocol (NTP) uses as its primary means of communication?

- A. 113
- B. 69
- C. 123
- D. 161

Answer: C

NEW QUESTION 398

Henry is a cyber security specialist hired by BlackEye - Cyber security solutions. He was tasked with discovering the operating system (OS) of a host. He used the Unknornscan tool to discover the OS of the target system. As a result, he obtained a TTL value, which indicates that the target system is running a Windows OS. Identify the TTL value Henry obtained, which indicates that the target OS is Windows.

- A. 64
- B. 128
- C. 255
- D. 138

Answer: B

Explanation:

Windows TTL 128, Linux TTL 64, OpenBSD 255 ... <https://subinsb.com/default-device-ttl-values/> Time to Live (TTL) represents the number of 'hops' a packet can take before it is considered invalid. For Windows/Windows Phone, this value is 128. This value is 64 for Linux/Android.

NEW QUESTION 403

What type of analysis is performed when an attacker has partial knowledge of inner-workings of the application?

- A. Black-box
- B. Announced
- C. White-box
- D. Grey-box

Answer: D

NEW QUESTION 405

Bob is going to perform an active session hijack against Brownies Inc. He has found a target that allows session-oriented connections (Telnet) and performs the sequence prediction on the target operating system. He manages to find an active session due to the high level of traffic on the network. What is Bob supposed to do next?

- A. Take over the session
- B. Reverse sequence prediction
- C. Guess the sequence numbers
- D. Take one of the parties offline

Answer: C

NEW QUESTION 408

What is the common name for a vulnerability disclosure program opened by companies on platforms such as HackerOne?

- A. Vulnerability hunting program
- B. Bug bounty program
- C. White-hat hacking program
- D. Ethical hacking program

Answer: B

Explanation:

Bug bounty programs allow independent security researchers to report bugs to a company and receive rewards or compensation. These bugs are usually sometimes security exploits and vulnerabilities, although they will additionally embody method problems, hardware flaws, and so on.

The reports are usually created through a program run by an associate degree freelance third party (like Bugcrowd or HackerOne). The companies can get wind of (and run) a program curated to the organization's wants.

Programs are also non-public (invite-only) wherever reports are usually unbroken confidential to the organization or public (where anyone will sign in and join). They will happen over a collection timeframe or with without stopping date (though the second possibility is a lot of common).

Who uses bug bounty programs? Many major organizations use bug bounties as an area of their security program, together with AOL, Android, Apple, Digital Ocean, and Goldman Sachs. You'll read an inventory of all the programs offered by major bug bounty suppliers, Bugcrowd and HackerOne, at these links.

Why do corporations use bug bounty programs? Bug bounty programs provide corporations the flexibility to harness an outsized cluster of hackers so as to seek out bugs in their code.

This gives them access to a bigger variety of hackers or testers than they'd be able to access on a one-on-one basis. It {can also|also will|can even|may also|may} increase the probabilities that bugs are usually found and reported to them before malicious hackers can exploit them.

It may also be an honest publicity alternative for a firm. As bug bounties became a lot of common, having a bug bounty program will signal to the general public and even regulators that a corporation incorporates a mature security program.

This trend is likely to continue, as some have begun to see bug bounty programs as a business normal that all companies ought to invest in.

Why do researchers and hackers participate in bug bounty programs? Finding and news bugs via a bug bounty program may end up in each money bonuses and recognition. In some cases, it will be a good thanks to show real-world expertise once you are looking for employment, or will even facilitate introduce you to parents on the protection team within a company.

This can be full time income for a few of us, income to supplement employment, or the way to point out off your skills and find a full time job.

It may also be fun! It is a nice (legal) probability to check out your skills against huge companies and government agencies.

What are the disadvantages of a bug bounty program for independent researchers and hackers? A lot of hackers participate in these varieties of programs, and it will be tough to form a major quantity of cash on the platform.

In order to say the reward, the hacker has to be the primary person to submit the bug to the program. meaning that in apply, you may pay weeks searching for a bug to use, solely to be the person to report it and build no cash.

Roughly ninety seven of participants on major bug bounty platforms haven't sold-out a bug.

In fact, a 2019 report from HackerOne confirmed that out of quite three hundred,000 registered users, solely around two.5% received a bounty in their time on the platform.

Essentially, most hackers are not creating a lot of cash on these platforms, and really few square measure creating enough to switch a full time wage (plus they do not have advantages like vacation days, insurance, and retirement planning).

What square measure the disadvantages of bug bounty programs for organizations? These programs square measure solely helpful if the program ends up in the companies realizing issues that they weren't able to find themselves (and if they'll fix those problems)!

If the companies is not mature enough to be able to quickly rectify known problems, a bug bounty program is not the right alternative for his or her companies.

Also, any bug bounty program is probably going to draw in an outsized range of submissions, several of which can not be high-quality submissions. a corporation must be ready to cope with the exaggerated volume of alerts, and also the risk of a coffee signal to noise magnitude relation (essentially that it's probably that they're going to receive quite few unhelpful reports for each useful report).

Additionally, if the program does not attract enough participants (or participants with the incorrect talent set, and so participants are not able to establish any bugs), the program is not useful for the companies.

The overwhelming majority of bug bounty participants consider web site vulnerabilities (72%, per HackerOn), whereas solely a number of (3.5%) value more highly to seek for package vulnerabilities.

This is probably because of the actual fact that hacking in operation systems (like network hardware and memory) needs a big quantity of extremely specialised experience. this implies that firms may even see vital come on investment for bug bounties on websites, and not for alternative applications, notably those that need specialised experience.

This conjointly implies that organizations which require to look at AN application or web site among a selected time-frame may not need to rely on a bug bounty as there is no guarantee of once or if they receive reports.

Finally, it are often probably risky to permit freelance researchers to try to penetrate your network. this could end in public speech act of bugs, inflicting name harm within the limelight (which could end in individuals not eager to purchase the organizations' product or service), or speech act of bugs to additional malicious third parties, United Nations agency may use this data to focus on the organization.

NEW QUESTION 412

Which access control mechanism allows for multiple systems to use a central authentication server (CAS) that permits users to authenticate once and gain access to multiple systems?

- A. Role Based Access Control (RBAC)
- B. Discretionary Access Control (DAC)
- C. Single sign-on
- D. Windows authentication

Answer: C

NEW QUESTION 416

What is GINA?

- A. Gateway Interface Network Application
- B. GUI Installed Network Application CLASS
- C. Global Internet National Authority (G-USA)
- D. Graphical Identification and Authentication DLL

Answer: D

NEW QUESTION 421

Which of the following programs is usually targeted at Microsoft Office products?

- A. Polymorphic virus
- B. Multipart virus
- C. Macro virus
- D. Stealth virus

Answer: C

NEW QUESTION 425

A bank stores and processes sensitive privacy information related to home loans. However, auditing has never been enabled on the system. What is the first step that the bank should take before enabling the audit feature?

- A. Perform a vulnerability scan of the system.
- B. Determine the impact of enabling the audit feature.
- C. Perform a cost/benefit analysis of the audit feature.
- D. Allocate funds for staffing of audit log review.

Answer: B

NEW QUESTION 428

Which system consists of a publicly available set of databases that contain domain name registration contact information?

- A. WHOIS
- B. CAPTCHA
- C. IANA
- D. IETF

Answer: A

NEW QUESTION 432

What does the following command in netcat do? `nc -l -u -p55555 < /etc/passwd`

- A. logs the incoming connections to /etc/passwd file
- B. loads the /etc/passwd file to the UDP port 55555
- C. grabs the /etc/passwd file when connected to UDP port 55555
- D. deletes the /etc/passwd file when connected to the UDP port 55555

Answer: C

NEW QUESTION 435

In both pharming and phishing attacks, an attacker can create websites that look similar to legitimate sites with the intent of collecting personal identifiable information from its victims.

What is the difference between pharming and phishing attacks?

- A. In a pharming attack, a victim is redirected to a fake website by modifying their host configuration file or by exploiting vulnerabilities in DNS
- B. In a phishing attack, an attacker provides the victim with a URL that is either misspelled or looks similar to the actual websites domain name
- C. In a phishing attack, a victim is redirected to a fake website by modifying their host configuration file or by exploiting vulnerabilities in DNS
- D. In a pharming attack, an attacker provides the victim with a URL that is either misspelled or looks very similar to the actual websites domain name
- E. Both pharming and phishing attacks are purely technical and are not considered forms of social engineering
- F. Both pharming and phishing attacks are identical

Answer: A

NEW QUESTION 439

A company's policy requires employees to perform file transfers using protocols which encrypt traffic. You suspect some employees are still performing file transfers using unencrypted protocols because the employees do not like changes. You have positioned a network sniffer to capture traffic from the laptops used by employees in the data ingest department. Using Wireshark to examine the captured traffic, which command can be used as display filter to find unencrypted file transfers?

- A. `tcp.port == 21`
- B. `tcp.port == 23`
- C. `tcp.port == 21 || tcp.port == 22`
- D. `tcp.port != 21`

Answer: A

NEW QUESTION 440

Jake, a professional hacker, installed spyware on a target iPhone to spy on the target user's activities. He can take complete control of the target mobile device by jailbreaking the device remotely and record audio, capture screenshots, and monitor all phone calls and SMS messages. What is the type of spyware that Jake used to infect the target device?

- A. DroidSheep
- B. Andorot
- C. Zscaler
- D. Trident

Answer: B

NEW QUESTION 445

A company's security policy states that all Web browsers must automatically delete their HTTP browser cookies upon terminating. What sort of security breach is this policy attempting to mitigate?

- A. Attempts by attackers to access the user and password information stored in the company's SQL database.
- B. Attempts by attackers to access Web sites that trust the Web browser user by stealing the user's authentication credentials.
- C. Attempts by attackers to access password stored on the user's computer without the user's knowledge.
- D. Attempts by attackers to determine the user's Web browser usage patterns, including when sites were visited and for how long.

Answer: B

NEW QUESTION 450

Johnson, an attacker, performed online research for the contact details of reputed cybersecurity firms. He found the contact number of sibertech.org and dialed the number, claiming himself to represent a technical support team from a vendor. He warned that a specific server is about to be compromised and requested sibertech.org to follow the provided instructions. Consequently, he prompted the victim to execute unusual commands and install malicious files, which were then used to collect and pass critical information to Johnson's machine. What is the social engineering technique Steve employed in the above scenario?

- A. Quid pro quo
- B. Diversion theft
- C. Elicitation
- D. Phishing

Answer: A

Explanation:

<https://www.eccouncil.org/what-is-social-engineering/>

This Social Engineering scam involves an exchange of information that can benefit both the victim and the trickster. Scammers would make the prey believe that a fair exchange will be present between both sides, but in reality, only the fraudster stands to benefit, leaving the victim hanging on to nothing. An example of a Quid Pro Quo is a scammer pretending to be an IT support technician. The con artist asks for the login credentials of the company's computer saying that the company

is going to receive technical support in return. Once the victim has provided the credentials, the scammer now has control over the company's computer and may possibly load malware or steal personal information that can be a motive to commit identity theft.

"A quid pro quo attack (aka something for something" attack) is a variant of baiting. Instead of baiting a target with the promise of a good, a quid pro quo attack promises a service or a benefit based on the execution of a specific action."

<https://resources.infosecinstitute.com/topic/common-social-engineering-attacks/#:~:text=A%20quid%20pro%20>

NEW QUESTION 451

Clark is a professional hacker. He created and configured multiple domains pointing to the same host to switch quickly between the domains and avoid detection. Identify the behavior of the adversary In the above scenario.

- A. use of command-line interface
- B. Data staging
- C. Unspecified proxy activities
- D. Use of DNS tunneling

Answer: C

Explanation:

A proxy server acts as a gateway between you and therefore the internet. It's an intermediary server separating end users from the websites they browse. Proxy servers provide varying levels of functionality, security, and privacy counting on your use case, needs, or company policy. If you're employing a proxy server, internet traffic flows through the proxy server on its thanks to the address you requested. A proxy server is essentially a computer on the web with its own IP address that your computer knows. once you send an internet request, your request goes to the proxy server first. The proxy server then makes your web request on your behalf, collects the response from the online server, and forwards you the online page data so you'll see the page in your browser.

NEW QUESTION 454

Which type of attack attempts to overflow the content-addressable memory (CAM) table in an Ethernet switch?

- A. Evil twin attack
- B. DNS cache flooding
- C. MAC flooding
- D. DDoS attack

Answer: C

NEW QUESTION 458

Firewalls are the software or hardware systems that are able to control and monitor the traffic coming in and out the target network based on pre-defined set of rules. Which of the following types of firewalls can protect against SQL injection attacks?

- A. Data-driven firewall
- B. Packet firewall
- C. Web application firewall
- D. Stateful firewall

Answer: C

NEW QUESTION 460

Larry, a security professional in an organization, has noticed some abnormalities In the user accounts on a web server. To thwart evolving attacks, he decided to harden the security of the web server by adopting a countermeasures to secure the accounts on the web server.

Which of the following countermeasures must Larry implement to secure the user accounts on the web server?

- A. Enable unused default user accounts created during the installation of an OS
- B. Enable all non-interactive accounts that should exist but do not require interactive login
- C. Limit the administrator or toot-level access to the minimum number of users
- D. Retain all unused modules and application extensions

Answer: C

NEW QUESTION 465

Although FTP traffic is not encrypted by default, which layer 3 protocol would allow for end-to-end encryption of the connection?

- A. SFTP
- B. Ipsec
- C. SSL
- D. FTPS

Answer: B

NEW QUESTION 469

Which regulation defines security and privacy controls for Federal information systems and organizations?

- A. HIPAA
- B. EU Safe Harbor
- C. PCI-DSS
- D. NIST-800-53

Answer: D

NEW QUESTION 470

Why containers are less secure than virtual machines?

- A. Host OS on containers has a larger surface attack.
- B. Containers may full fill disk space of the host.
- C. A compromise container may cause a CPU starvation of the host.
- D. Containers are attached to the same virtual network.

Answer: A

NEW QUESTION 473

An attacker, using a rogue wireless AP, performed an MITM attack and injected an HTML code to embed a malicious applet in all HTTP connections. When users accessed any page, the applet ran and exploited many machines. Which one of the following tools the hacker probably used to inject HTML code?

- A. Wireshark
- B. Ettercap
- C. Aircrack-ng
- D. Tcpdump

Answer: B

NEW QUESTION 475

What is the following command used for?

```
sqlmap.py-u  
„http://10.10.1.20/?p=1  
&forumaction=search" -dbs
```

- A. Creating backdoors using SQL injection
- B. Enumerating the databases in the DBMS for the URL
- C. Retrieving SQL statements being executed on the database
- D. Searching database statements at the IP address given

Answer: A

NEW QUESTION 479

.....

THANKS FOR TRYING THE DEMO OF OUR PRODUCT

Visit Our Site to Purchase the Full Set of Actual 312-50v11 Exam Questions With Answers.

We Also Provide Practice Exam Software That Simulates Real Exam Environment And Has Many Self-Assessment Features. Order the 312-50v11 Product From:

<https://www.2passeasy.com/dumps/312-50v11/>

Money Back Guarantee

312-50v11 Practice Exam Features:

- * 312-50v11 Questions and Answers Updated Frequently
- * 312-50v11 Practice Questions Verified by Expert Senior Certified Staff
- * 312-50v11 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * 312-50v11 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year