

CompTIA

Exam Questions 220-1201

CompTIA A+ Certification Exam: Core 1



NEW QUESTION 1

- (Topic 1)

A network administrator must ensure that a printer will still be assigned a specific IP address even if all addresses are depleted. Which of the following network configuration concepts is this describing?

- A. VLAN
- B. Lease
- C. Reservation
- D. Exclusion

Answer: C

Explanation:

Comprehensive and Detailed Explanation From Exact Extract:

A DHCP reservation binds a specific MAC address to an IP address so the device always receives the same IP from the DHCP server. This ensures network devices like printers maintain consistent connectivity and availability even when the IP pool is low.

Reference: "CompTIA A+ Complete Study Guide" by Quentin Docter – Chapter 18, page 1252.

NEW QUESTION 2

- (Topic 1)

A technician is working on a RAID 1 array that is apparently degraded. The technician verifies the RAM and power are both operating as expected. Which of the following can the technician do to further isolate the issue?

- A. Perform individual drive diagnostics.
- B. Run the chkdsk /i command.
- C. Rebuild the RAID array.
- D. Reconfigure the array as RAID 0.

Answer: A

Explanation:

Comprehensive and Detailed In-Depth Explanation:

A degraded RAID 1 array usually means one of the drives has failed or is failing. The correct next step is to run diagnostics on each drive to identify the faulty one. RAID 1 uses mirroring, so one good drive should still contain all the data.

? Option B: chkdsk checks file system integrity, not hardware drive health.

? Option C: Rebuilding should only occur after identifying and replacing a faulty drive.

? Option D: RAID 0 offers no redundancy and would destroy data in this context. CompTIA A+ Core 1 Exam Objective Reference:

? Objective 3.5: Given a scenario, troubleshoot problems related to storage devices.

NEW QUESTION 3

- (Topic 1)

An IT specialist compares Bluetooth and NFC technologies for mobile device connectivity. Which of the following statements accurately describes a key difference between the two?

- A. NFC is faster than Bluetooth when transferring large files between devices.
- B. NFC consumes more power than Bluetooth, making it less suitable for devices in which battery conservation is crucial.
- C. NFC requires pairing with the receiving host, whereas Bluetooth just needs the available connection.
- D. NFC works best within a few centimeters, but Bluetooth can connect devices that are up to 32ft (10m) apart.

Answer: D

Explanation:

Comprehensive and Detailed In-Depth Explanation:

NFC (Near-Field Communication) operates at very short ranges — usually less than 4cm, and is ideal for quick, secure transactions like contactless payments. Bluetooth supports longer ranges (up to 10 meters or 32 feet) and is suited for ongoing connections like wireless headsets or file transfers.

? Option A: Bluetooth is faster for large file transfers.

? Option B: NFC uses less power, not more.

? Option C: NFC does not require pairing — Bluetooth does. CompTIA A+ Core 1 Exam Objective Reference:

? Objective 1.5: Given a scenario, connect and configure accessories and ports of mobile devices.

=====

NEW QUESTION 4

- (Topic 1)

Several storms cause mission-critical servers to go offline unexpectedly. A server also goes offline suddenly due to hardware failure. Upon assessment, the company purchases new UPSs to condition power and allow the OSs to shut down gracefully in the event of a power failure. However, the UPSs are delayed due to supply chain issues. Which of the following can balance a cost-effective solution with uptime requirements?

- A. Purchasing backup generators
- B. Increasing input voltage
- C. Installing redundant PSUs
- D. Activating a hot site

Answer: C

Explanation:

* C. Installing redundant PSUs (Power Supply Units):

Redundant PSUs provide fault tolerance by ensuring that if one power supply fails, another will take over seamlessly.

This is a cost-effective way to increase uptime while waiting for the UPSs to arrive. Incorrect Options:

- * A. Purchasing backup generators: Generators are costly and are typically used for long-term outages, not as an immediate or cost-effective solution.
- * B. Increasing input voltage: This is not a practical solution to hardware failures or power issues.
- * D. Activating a hot site: A hot site is an expensive, fully operational backup facility that would not be a cost-effective solution for this scenario.

Key Takeaway: Installing redundant PSUs is a cost-effective way to balance uptime requirements in case of power or hardware failure.

Reference: CompTIA A+ Core 1 Exam Objectives (220-1201), Domain 5.3 – Power-related troubleshooting.

NEW QUESTION 5

- (Topic 1)

Which of the following is an advantage of using a hybrid cloud instead of a public cloud?

- A. Ability to reduce management overhead
- B. Ability to use cross-platform virtualization
- C. Ability to meet data residency requirements
- D. Ability to leverage IaaS and PaaS

Answer: C

Explanation:

Comprehensive and Detailed Explanation From Exact Extract:

A hybrid cloud combines on-premises infrastructure with public cloud services. One significant advantage is that it allows organizations to keep sensitive data in a private environment to meet regulatory or data residency requirements, while still utilizing the scalability and cost-efficiency of the public cloud for other workloads. This ensures compliance with legal mandates about data location.

Reference: "CompTIA A+ Complete Study Guide" by Quentin Docter – Chapter 8, "Virtualization and Cloud Computing", page 488. Also supported in CompTIA A+ Exam

Objectives 220-1201 under section 4.1.

NEW QUESTION 6

- (Topic 1)

When turning on a workstation, a technician observes the following message: "Bootable device not found."

The technician verifies the correct boot order in the BIOS. Which of the following steps should the technician take next?

- A. Reformat the HDD.
- B. Run HDD diagnostics.
- C. Reseat the RAM.
- D. Replace the HDD.

Answer: B

Explanation:

Comprehensive and Detailed In-Depth Explanation:

If the system reports "Bootable device not found", and the BIOS is configured correctly, the next step is to run diagnostics on the hard drive to check for physical or logical failure. It could be a sign of a failing drive or corrupt boot sector.

? Option A: Reformatting the drive would erase data — not a diagnostic step.

? Option C: RAM does not affect whether a drive is bootable.

? Option D: Replacing the drive should only be done after diagnostics confirm failure. CompTIA A+ Core 1 Exam Objective Reference:

? Objective 3.5: Given a scenario, troubleshoot problems related to storage devices.

NEW QUESTION 7

- (Topic 1)

Which of the following tools would a technician use to connect wires to an RJ45 connector?

- A. Crimper
- B. Cable stripper
- C. Punchdown
- D. Loopback plug

Answer: A

Explanation:

Comprehensive and Detailed Explanation From Exact Extract:

A crimper is specifically used to attach RJ45 connectors to the ends of network cables. It presses the connector pins into the cable's wires, establishing a secure electrical

connection. A punchdown tool is used for wiring patch panels or keystone jacks, not for attaching connectors.

Reference: "CompTIA A+ Complete Study Guide" by Quentin Docter – Chapter 3, "Cables and Connectors", page 162. Also outlined in the 220-1201 objectives under 3.1.

NEW QUESTION 8

- (Topic 1)

A user brings a laptop to work every morning, correctly seats it in the docking station and then opens the laptop to begin work with no issues. After the user left the laptop at home during a two-week vacation, the laptop is no longer working. Upon returning to the office, the user reports that the keyboard and display are no longer working. Which of the following should the technician ask the user to do first?

- A. Ensure the docking station is plugged in.
- B. Press and release the laptop power button.
- C. Plug the laptop in and let it charge overnight.
- D. Connect the laptop directly to the network.

Answer: B

Explanation:

Reasoning: Many docking stations provide power and functionality only when the laptop is properly powered on. If the laptop was powered off (e.g., during the vacation), docking it will not automatically turn it on. The technician should first ensure the laptop is powered on by pressing the power button.

This is a common troubleshooting step when laptops in docking stations appear non-functional.

Relevance to CompTIA A+ Core 1: This falls under Objective 5.2, which covers diagnosing and resolving common laptop and mobile device issues.

Why the Other Options Are Incorrect:

* A. Ensure the docking station is plugged in:

While ensuring power to the docking station is important, the scenario specifies that the issue occurred after a vacation. The likelihood of the docking station losing power coincidentally during the vacation is low. Verifying the laptop's power state should be the first step.

* C. Plug the laptop in and let it charge overnight:

There is no indication the laptop's battery is drained. While charging could resolve a dead battery, the user is more likely experiencing an issue where the laptop is powered off but docked, so charging overnight is not the best first step.

* D. Connect the laptop directly to the network:

A network connection will not resolve the primary issue of the keyboard and display not working. Addressing the laptop's power state is a higher priority.

Practical Example:

If a user returns from a vacation and places a powered-off laptop into a docking station, it may not automatically power on. Pressing the power button ensures the laptop is operational and communicating with the docking station.

CompTIA A+ Exam Objective Alignment:

Objective 5.2: Troubleshooting common laptop issues, including power, display, and peripheral connectivity.

NEW QUESTION 9

- (Topic 1)

A technician needs to move a workstation to a different logical network segment. Which of the following technologies should the technician use?

- A. DHCP
- B. VLAN
- C. DNS
- D. VPN

Answer: B

Explanation:

Comprehensive and Detailed In-Depth Explanation:

AVLAN (Virtual LAN) is used to logically segment a network without requiring physical separation. It enables grouping devices based on function or department regardless of their physical location.

? Option A (DHCP): Assigns IP addresses dynamically but doesn't create network segments.

? Option C (DNS): Resolves domain names to IP addresses, not used for network segmentation.

? Option D (VPN): Provides secure remote access but does not relate to logical segmentation within a local network.

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 2.3: Explain common logical networking concepts.

NEW QUESTION 10

- (Topic 1)

A management team is concerned about enterprise devices that do not have any controls in place. Which of the following should an administrator implement to address this concern?

- A. MDM
- B. MFA
- C. vpn
- D. SSL

Answer: A

Explanation:

Mobile Device Management (MDM) enables administrators to enforce controls on enterprise devices, such as restricting apps, ensuring compliance, and remotely managing security policies.

Why Not B (MFA): Multi-Factor Authentication secures user access but does not control device configurations.

Why Not C (VPN): VPN secures communication but does not enforce device controls. Why Not D (SSL): SSL secures data in transit but does not provide device management. CompTIA A+ Exam Reference: Core 2 (220-1102), Section 2.7, device management concepts.

NEW QUESTION 10

- (Topic 1)

Which of the following is designed to be used in commercial spaces?

- A. USB 3.1 Gen 2
- B. Straight tip fiber connector
- C. Plenum cabling
- D. Cat 8

Answer: C

Explanation:

Plenum cabling is designed for use in commercial spaces where cables run through air ducts or plenum spaces, as it has fire-resistant properties and emits less toxic smoke.

Why Not A (USB 3.1 Gen 2): USB is for peripheral connections, not large-scale commercial installations.

Why Not B (Straight tip fiber connector): Fiber connectors are for high-speed connections but are not specifically for commercial spaces.

Why Not D (Cat 8): While Cat 8 is high-speed, it is not uniquely suited for commercial spaces like plenum cabling.

CompTIA A+ Exam Reference: Core 1 (220-1201), Section 3.1, cabling standards.

NEW QUESTION 13

- (Topic 1)

A salesperson is unable to reach the internet from a home office PC. A support technician wants to verify the router is receiving a valid public IP address. Which of the following is a valid public IP address in this scenario?

- A. 10.254.128.11
- B. 66.157.195.20
- C. 172.16.0.30
- D. 192.168.1.50

Answer: B

Explanation:

A valid public IP address must fall outside the private IP address ranges: 10.0.0.0 to 10.255.255.255, 172.16.0.0 to 172.31.255.255, 192.168.0.0 to 192.168.255.255. 66.157.195.20 is outside these ranges, making it a public IP address. Why Not A, C, D: These IPs fall within private IP address ranges.
CompTIA A+ Exam Reference: Core 1 (220-1201), Section 2.6, IP addressing.

NEW QUESTION 18

- (Topic 1)

Which of the following types of RAM is typically used in servers?

- A. SODIMM
- B. Rambus
- C. DDR3
- D. ECC

Answer: D

Explanation:

ECC (Error-Correcting Code) RAM is commonly used in servers to provide error detection and correction, improving reliability in critical systems. It is designed to detect and correct single-bit errors, ensuring data integrity in environments where stability is paramount. Option A (SODIMM): Incorrect. SODIMM is typically used in laptops, not servers.

Option B (Rambus): Incorrect. Rambus is an outdated RAM type and not commonly used today.

Option C (DDR3): Incorrect. While DDR3 is a type of RAM, it is not specific to servers and does not provide error correction.

References:

CompTIA A+ Core 1 Objectives: 3.2 (RAM types and their uses)

NEW QUESTION 20

- (Topic 1)

A technician is troubleshooting a desktop PC that is plugged into a UPS. The PC loses the system date/time after every power outage. Which of the following should the technician do to resolve the issue? (Select two).

- A. Run a BIOS update.
- B. Swap out the RAM.
- C. Disable NTP in the OS.
- D. Repair the backup power source.
- E. Replace the CMOS battery.
- F. Install a surge protector.

Answer: DE

Explanation:

Comprehensive and Detailed Explanation From Exact Extract:

The system date/time is maintained by the CMOS battery when the PC is powered off. If this battery fails, time resets will occur. Additionally, since the system is connected to a UPS, ensuring the UPS is functioning correctly (i.e., the backup power source) is essential. Reference: "CompTIA A+ Complete Study Guide" by Quentin Docter – Chapter 1, page 40.

NEW QUESTION 21

- (Topic 1)

A technician is replacing a failed power supply in a ten-year-old computer. When installing the customer-provided power supply, the technician discovers the ATX connector would not plug into the motherboard. The customer wants a cost-effective solution. Which of the following should the technician do next?

- A. Adjust the input voltage.
- B. Install a modular power supply.
- C. Rebuild the failed power supply.
- D. Use a 20-pin to 24-pin adapter.

Answer: D

Explanation:

Older motherboards use 20-pin connectors, while newer power supplies use 24-pin connectors. An adapter resolves the compatibility issue cost-effectively.

Why Not A (Adjust the input voltage): Input voltage adjustment is unrelated to connector compatibility.

Why Not B (Install a modular power supply): While modular supplies are versatile, this doesn't address the connector issue directly.

Why Not C (Rebuild the failed power supply): Rebuilding is costly and complex compared to using an adapter.

CompTIA A+ Exam Reference: Core 1 (220-1201), Section 3.4, power supply compatibility.

NEW QUESTION 23

- (Topic 1)

A user prints a spreadsheet in duplex mode. The spreadsheet is difficult to read because some of the columns spill onto the second side of the page. Which of the

following should the user do to prevent the issue but still print on both sides of the page?

- A. Turn off duplex printing.
- B. Try a smaller font size in the spreadsheet.
- C. Change the page orientation.
- D. Use a different print driver.

Answer: C

Explanation:

Comprehensive and Detailed In-Depth Explanation:

Changing the page orientation(e.g., fromportrait to landscape) allows wider columns to fit on one side of the page. This maintains readability while continuing to use duplex printing.

? Option A:Disabling duplex defeats the goal of printing on both sides.

? Option B:May help, but could make the document harder to read if the font is too small.

? Option D:Unlikely to resolve formatting issues related to layout and dimensions. CompTIA A+ Core 1 Exam Objective Reference:

? Objective 3.7: Given a scenario, troubleshoot common printer problems.

NEW QUESTION 28

- (Topic 1)

A user reports slow internet browsing. The technician finds high CPU and memory usage, and pop-ups occur every minute. Which of the following should the technician do next?

- A. Escalate to the network team to check end-to-end connectivity.
- B. Download and install the latest drivers.
- C. Update the anti-malware signatures and scan the system.
- D. Check the wireless settings and validate the DHCP configuration.

Answer: C

Explanation:

Comprehensive and Detailed In-Depth Explanation:

High resource usage along with frequentpop-upsare strong signs of amalware infection. The next logical step is toudate anti-malware definitionsandrun a full scantodetect and remove threats.

? Option A:Network performance is likely not the root cause — local system behavior points to malware.

? Option B:Drivers affect hardware functionality; they don't resolve malware-related slowness.

? Option D:DHCP issues usually cause IP conflicts or no network access, not CPU spikes or pop-ups.

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 4.2: Given a scenario, detect, remove, and prevent malware using appropriate tools and methods.

NEW QUESTION 30

- (Topic 1)

Which of the following technologies best allows a phone to connect to a point-of-sale terminal for wireless payments?

- A. Bluetooth
- B. NFC
- C. Wi-Fi
- D. Cellular

Answer: B

Explanation:

Comprehensive and Detailed Explanation From Exact Extract:

Near-field communication (NFC) is a short-distance wireless communication method widely used in mobile payment systems like Apple Pay and Google Pay. Simply placing the device near a compatible terminal initiates the payment process.

Reference: "Mike Meyers' CompTIA A+ Certification All-in-One Exam Guide" – Chapter 24, page 1022.

NEW QUESTION 32

- (Topic 1)

A support technician receives a call stating that a user has added a device to the network. The user used the same configurations from another workstation. When both workstations are turned on, neither can access the network reliably. Which of the following is the most likely cause of the issue?

- A. The new computer has a duplicate IP address.
- B. The DNS server is registering both hostnames.
- C. The network cable was improperly terminated.
- D. The security on the switchport needs to be reset.

Answer: A

Explanation:

Comprehensive and Detailed In-Depth Explanation:

If two devices have thesame static IP address, anIP conflictoccurs. This results in both devices being intermittently disconnected or unable to communicate on the network. It's a common mistake when copying configurations manually.

? Option B:DNS conflicts wouldn't cause total disconnection — and wouldn't occur just from copying IP settings.

? Option C:A cable issue would only affect one workstation.

? Option D:Switchport security issues wouldn't affect both machines simultaneously unless port security was configured very specifically.

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 2.6: Given a scenario, configure and troubleshoot network connectivity.

NEW QUESTION 33

- (Topic 1)

Which of the following is a benefit of using a VLAN?

- A. It minimizes collision domains.
- B. It provides private access to cloud resources.
- C. It increases network address space.
- D. It enables secure network segmentation.

Answer: D

Explanation:

A VLAN (Virtual Local Area Network) segments a physical network into separate logical networks, enhancing security by isolating traffic.

Why Not A (Minimizes collision domains): VLANs manage broadcast domains, not collision domains.

Why Not B (Provides private access to cloud resources): VLANs operate within a local network, not cloud-specific.

Why Not C (Increases network address space): VLANs do not affect address space. CompTIA A+ Exam Reference: Core 1 (220-1201), Section 2.6, VLAN concepts.

NEW QUESTION 34

- (Topic 1)

A technician is putting RJ45 connectors on Cat 6 cables. Which of the following tools should the technician use to secure the connectors?

- A. Loopback plug
- B. Wire cutters
- C. Punchdown
- D. Crimping

Answer: D

NEW QUESTION 35

- (Topic 1)

A technician has discovered that some users are connected to a network that is not available on the user interface. Which of the following is the most effective tool the technician can use to identify networks that are not broadcasting SSIDs?

- A. Cable tester
- B. Toner probe
- C. Wi-Fi analyzer
- D. Loopback plug

Answer: C

Explanation:

Comprehensive and Detailed Step-by-Step Explanation: Wi-Fi Analyzer:

A Wi-Fi analyzer is a tool used to detect and analyze wireless networks, even those that are not broadcasting their SSIDs (hidden networks).

It provides detailed information about nearby networks, including signal strength, channel usage, and security protocols.

In this case, the Wi-Fi analyzer can identify the hidden networks that users are connected to, which are not visible on the standard user interface.

Incorrect Options:

* A. Cable tester: A cable tester is used to test the integrity of physical network cables. It does not detect wireless networks or SSIDs.

* B. Toner probe: A toner probe is used to trace and identify cables within a wiring system. It is not applicable to wireless network analysis.

* D. Loopback plug: A loopback plug is used to test the functionality of a network port or NIC. It is unrelated to identifying hidden wireless networks.

Key Takeaway:

The most effective tool for identifying hidden wireless networks is a Wi-Fi analyzer, as it can detect networks that are not broadcasting their SSIDs.

Reference: CompTIA A+ Core 1 Exam Objectives (220-1201), Domain 2.5 – Explain basic wired and wireless networking concepts, including Wi-Fi tools and protocols.

NEW QUESTION 37

- (Topic 1)

Which of the following cable types is the most suitable for delivering 10Gb speeds for distances over 328ft (100m) but under 1,312ft (400m)?

- A. Multimode fiber
- B. Single-mode fiber
- C. Cat 6a
- D. Cat 6

Answer: A

Explanation:

Comprehensive and Detailed Step-by-Step Explanation:

When delivering 10Gbps speeds over long distances, fiber optic cables are the best choice. Here's the breakdown:

* A. Multimode Fiber (Correct Answer):

Multimode fiber is designed for relatively short to medium distances (up to 1,312 feet or 400 meters) while supporting high-speed data transfer (10Gbps and above).

It uses LED light sources and is cost-effective for environments like data centers or within buildings.

For the specified distance of over 328ft but under 1,312ft, multimode fiber is the most suitable option.

Incorrect Options:

* B. Single-mode Fiber: While single-mode fiber supports much greater distances (up to several miles or kilometers) and higher speeds, it is more expensive and unnecessary for the specified range. Single-mode fiber is generally used for long-haul networking or telecommunications.

* C. Cat 6a: Cat 6a is capable of 10Gbps speeds but only up to 328ft (100 meters). It cannot reliably handle the specified distance of over 328ft.

* D. Cat 6: Cat 6 is also limited to 10Gbps speeds at distances up to 328ft (100 meters). Beyond this range, it is unsuitable.

Key Takeaway:

For delivering 10Gbps speeds over distances longer than 328ft (100m) but under 1,312ft (400m), Multimode Fiber is the best choice due to its ability to support high-speed data over medium distances at a reasonable cost.

Reference: CompTIA A+ Core 1 Exam Objectives (220-1201), Domain 3.1 – Cable types and their characteristics, including fiber optic cables.

NEW QUESTION 41

- (Topic 1)

A technician needs to select PC components with a minimal number of visible internal cables. Which of the following should the technician use?

- A. SATA drive connections
- B. Liquid cooling
- C. Modular power supply
- D. Wireless NIC

Answer: C

Explanation:

Comprehensive and Detailed In-Depth Explanation:

A modular power supply allows a technician to connect only the power cables that are needed, reducing clutter and improving airflow. This is ideal when aiming for a clean build with minimal visible internal cables.

? Option A (SATA drive connections): Still require both power and data cables, adding to cable count.

? Option B (Liquid cooling): May reduce some bulk from large air coolers, but adds tubing and still needs cabling.

? Option D (Wireless NIC): Adds wireless capability but has no relation to internal cabling cleanliness.

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 3.3: Given a scenario, apply the appropriate PC configuration.

NEW QUESTION 42

- (Topic 1)

A projector has been shutting down after 30 minutes of use, and it has a strange smell. The technician confirms the power source is not the cause of the issue. Which of the following steps should the technician take next to resolve this issue?

- A. Replace the bulb
- B. Check the projector configuration.
- C. Clean the filter
- D. Adjust the gamma settings.

Answer: C

Explanation:

Reasoning: Projectors have air filters that prevent dust from entering the internal components. A clogged filter can cause the projector to overheat, resulting in shutdowns and even strange smells due to overheating components. Cleaning the filter is a standard troubleshooting step when projectors exhibit overheating symptoms.

Why the Other Options Are Incorrect:

* A. Replace the bulb:

While a failing bulb may eventually cause issues, it would not typically result in a strange smell or repeated shutdowns after a fixed period. Bulb issues usually manifest as dim or flickering images.

* B. Check the projector configuration:

Configuration settings, such as resolution or input options, would not cause overheating or shutdowns. This option does not address the described symptoms.

* D. Adjust the gamma settings:

Gamma settings affect display brightness and contrast but have no impact on overheating or strange smells.

Practical Example:

Dust accumulation in projectors is a common issue, especially in environments with poor air circulation. A clogged filter causes restricted airflow, leading to overheating and automatic shutdowns to protect internal components. Cleaning the filter typically resolves this issue.

CompTIA A+ Exam Objective Alignment:

Objective 5.5: Troubleshoot common video, projector, and display issues.

NEW QUESTION 45

- (Topic 1)

Which of the following printing initiatives would be best to accomplish environmentally friendly objectives?

- A. Requiring user authentication for printing
- B. Locking down printing to only certain individuals
- C. Modifying duplex settings to double-sided
- D. Changing the print quality settings to best

Answer: C

Explanation:

Comprehensive and Detailed Step-by-Step Explanation: Modifying duplex settings to double-sided:

Printing on both sides of the paper (duplex printing) reduces paper usage, making it one of the most effective environmentally friendly printing initiatives.

It directly minimizes waste and supports sustainability goals in the workplace. Incorrect Options:

* A. Requiring user authentication for printing: While this can reduce unnecessary or unauthorized printing, it does not directly address environmental objectives like saving resources.

* B. Locking down printing to only certain individuals: Limiting access may reduce printing overall, but it does not actively contribute to environmentally friendly practices like duplex printing.

* D. Changing the print quality settings to best: Using the "best" print quality increases toner or ink usage, which is counterproductive to environmentally friendly objectives.

Key Takeaway:

Modifying duplex settings to enable double-sided printing is the best initiative to achieve environmentally friendly goals by reducing paper consumption.
Reference: CompTIA A+ Core 1 Exam Objectives (220-1201), Domain 3.8 – Implementing best practices for environmental impact.

NEW QUESTION 47

- (Topic 1)

An end user's domain password expires while they are working from home. The end user tries to reset the password using Ctrl+Alt+Delete and then receives the following message:

Configuration information could not be read from the domain controller, either because the machine is unavailable or because access is denied.

Which of the following will resolve this issue?

- A. Restart the computer.
- B. Connect to the VPN.
- C. Reset the account in Active Directory.
- D. Join the Wi-Fi network.

Answer: B

Explanation:

Comprehensive and Detailed In-Depth Explanation:

To change a domain password from a remote location, the system must communicate with the domain controller. Since the user is working from home, they need to connect to the corporate VPN to establish that secure connection. Without it, the password change cannot be authenticated.

? Option A: Restarting will not resolve the lack of connection to the domain controller.

? Option C: Resetting the password in AD could help, but doesn't let the user reset it themselves.

? Option D: The user may already be on Wi-Fi; the issue is with connecting to the corporate network, not local.

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 1.6: Given a scenario, configure basic mobile device network connectivity and application support.

=====

NEW QUESTION 49

- (Topic 1)

A security team wants to implement compliance controls that only permits the installation of company-approved software on user laptops. Which of the following should the IT department deploy?

- A. EDR
- B. VPN
- C. MDM
- D. SaaS

Answer: C

Explanation:

Mobile Device Management (MDM) allows IT departments to enforce compliance controls, such as restricting the installation of unapproved software, on laptops and mobile devices. Why Not A (EDR): Endpoint Detection and Response focuses on detecting and mitigating security threats, not compliance controls.

Why Not B (VPN): Virtual Private Networks provide secure connections but do not enforce software installation policies.

Why Not D (SaaS): Software as a Service refers to software delivery models and does not enforce compliance controls.

CompTIA A+ Exam Reference: Core 2 (220-1102), Section 2.7, device management and security.

NEW QUESTION 52

- (Topic 1)

A customer reports that the output from their thermal receipt printer has vertical white lines. Which of the following would most likely resolve this issue?

- A. Replacing the ink cartridge
- B. Using the correct paper type
- C. Installing a maintenance kit
- D. Cleaning the heating element

Answer: D

Explanation:

Comprehensive and Detailed In-Depth Explanation:

Thermal printers create images using a heated print head on specially coated thermal paper. Vertical white lines indicate that part of the heating element is dirty or blocked, preventing heat transfer to the paper. Cleaning the print head (heating element) will restore full functionality.

? Option A: Thermal printers do not use ink or toner, so this is not applicable.

? Option B: Wrong paper could cause blank output, but consistent vertical lines point to the print head.

? Option C: Maintenance kits are typically for laser printers, not thermal printers. CompTIA A+ Core 1 Exam Objective Reference:

? Objective 3.7: Given a scenario, troubleshoot common printer problems.

NEW QUESTION 55

- (Topic 1)

Which of the following connectors is found on an optical networking cable?

- A. RJ45
- B. LC
- C. USB-C
- D. Lightning

Answer: B

Explanation:

Comprehensive and Detailed Step-by-Step Explanation: LC Connector (Lucent Connector):

LC is a type of fiber optic connector commonly used in optical networking cables. It is small, compact, and widely used for high-speed data transfer over fiber optic networks.

LC connectors are specifically designed for fiber optic cables, making them the correct answer.

Incorrect Options:

* A. RJ45: RJ45 connectors are used for Ethernet cables (twisted-pair copper cabling) and are not compatible with optical networking cables.

* C. USB-C: USB-C is a connector type used for general-purpose data transfer, charging, and video output, not for optical networking.

* D. Lightning: Lightning connectors are proprietary to Apple devices and are not used in optical networking.

Key Takeaway:

The LC connector is specifically designed for fiber optic cables, making it the correct answer for optical networking.

Reference: CompTIA A+ Core 1 Exam Objectives (220-1201), Domain 3.1 – Cable and connector types, including fiber optic cables.

NEW QUESTION 56

- (Topic 1)

Which of the following would prevent a virtual machine from communicating with any endpoints on a network or the internet?

- A. VDI
- B. Private cloud
- C. Sandbox
- D. Type 1 hypervisor

Answer: C

Explanation:

Comprehensive and Detailed In-Depth Explanation:

A sandbox is an isolated virtual environment used to test or run applications securely without risk to the host or network. It prevents the VM from communicating with external systems, making it ideal for testing malware or suspicious software.

? Option A (VDI): Virtual Desktop Infrastructure allows network communication; it does not restrict it.

? Option B (Private cloud): Refers to a cloud deployment model, not a communication barrier.

? Option D (Type 1 hypervisor): Runs VMs directly on hardware and does not inherently block communication.

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 4.1: Compare and contrast cloud computing concepts.

=====

NEW QUESTION 58

- (Topic 1)

Each time a user tries to print, the paper becomes stuck at the last stage of the print job and the user has to pull the paper out of the printer. Which of the following is the most likely cause?

- A. Rollers
- B. Tray assembly
- C. Toner
- D. Printhead

Answer: A

Explanation:

If paper gets stuck at the last stage of printing, the rollers responsible for moving the paper through the printer are likely worn out or dirty.

Why Not B (Tray assembly): The tray assembly manages paper loading, not feeding during the print process.

Why Not C (Toner): Toner is unrelated to paper jams.

Why Not D (Printhead): Printheads manage ink/toner distribution, not paper movement. CompTIA A+ Exam Reference: Core 2 (220-1102), Section 4.6, printer troubleshooting.

NEW QUESTION 63

- (Topic 1)

A user wants to print files from an overseas office using a shared network folder. The user's laptop has no public-facing internet connectivity. Which of the following can be used to print from the shared network folder?

- A. ADF
- B. USB
- C. PCL
- D. SMB

Answer: D

Explanation:

Comprehensive and Detailed In-Depth Explanation:

SMB (Server Message Block) is a protocol used to access files and printers over a network, including across shared network folders. It enables the user to access and print files stored remotely on a shared directory.

? Option A (ADF): Automatic Document Feeder — hardware, not a network protocol.

? Option B (USB): Used for direct physical connections, not for printing over networks.

? Option C (PCL): Printer Command Language — relates to printer drivers, not file sharing or access.

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 3.4: Given a scenario, install and configure printers.

NEW QUESTION 65

- (Topic 1)

A customer reports that a text-only document prints with unrecognizable characters. The print preview correctly displays the document. Which of the following is the most likely cause of the issue?

- A. Outdated firmware
- B. Incorrect driver
- C. Bad toner cartridge
- D. Corrupted document file

Answer: B

NEW QUESTION 69

- (Topic 1)

When installing a network printer, a technician needs to ensure the printer is available after a network is restarted. Which of the following should the technician set up on the printer to meet this requirement?

- A. Static IP address
- B. Private address
- C. Wi-Fi on the printer
- D. Dynamic addressing

Answer: A

Explanation:

Comprehensive and Detailed In-Depth Explanation:

Assigning a static IP address to a network printer ensures it always retains the same address, allowing users and print servers to consistently reach it even after a reboot or network refresh.

? Option B (Private address): Refers to address ranges (e.g., 192.168.x.x) — doesn't guarantee address persistence.

? Option C (Wi-Fi): Is a connection method, not a method of IP assignment.

? Option D (Dynamic addressing): Via DHCP, which can change over time unless reservations are made (less reliable).

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 3.4: Given a scenario, install and configure printers.

NEW QUESTION 72

- (Topic 1)

A user connects their laptop to a projector in a conference room. Once connected, the user reports the screen is smaller at the bottom than at the top. The user tries restarting the laptop and then disconnecting and reconnecting the cable to the projector. Which of the following should a technician do to resolve the issue?

- A. Replace the HDMI cable.
- B. Power cycle the projector.
- C. Adjust the keystone
- D. Increase the resolution.

Answer: C

Explanation:

Comprehensive and Detailed Explanation From Exact Extract:

A distorted image where the screen is not symmetrical (wider at the top or bottom) is typically due to keystone distortion. Adjusting the projector's keystone settings corrects this trapezoidal effect caused by an angled projection.

Reference: "CompTIA A+ Complete Study Guide" by Quentin Docter – Chapter 3, page 152.

NEW QUESTION 74

- (Topic 1)

A user reports that their desktop PC does not turn on. Which of the following components would most likely cause the issue?

- A. PSU
- B. GPU
- C. RAM
- D. CPU

Answer: A

Explanation:

Comprehensive and Detailed In-Depth Explanation:

If a desktop fails to power on entirely, the most probable cause is a faulty Power Supply Unit (PSU). If there are no lights, fans, or POST beeps, the PSU may have failed, cutting off all power to the motherboard and components.

? Option B (GPU): Could prevent video output, but the system would still power on and beep.

? Option C (RAM): Missing or faulty RAM would cause POST errors but not prevent startup entirely.

? Option D (CPU): A bad CPU may cause POST failure, but the system would usually at least power on.

CompTIA A+ Core 1 Exam Objective Reference:

? Objective 3.5: Given a scenario, troubleshoot problems related to motherboards, RAM, CPU, and power.

=====

NEW QUESTION 78

- (Topic 1)

A company deploys server machines in a public cloud. Which of the following cloud service models is this an example of?

- A. Platform as a service
- B. Anything as a service
- C. Infrastructure as a service
- D. Software as a service

Answer: C

Explanation:

Comprehensive and Detailed Explanation From Exact Extract:

Infrastructure as a Service (IaaS) provides virtualized computing resources over the internet. This includes virtual servers, storage, and networking. Deploying server machines falls under IaaS since the organization is responsible for managing the OS and applications on top of the infrastructure.

Reference: "CompTIA A+ Complete Study Guide" by Quentin Docter – Chapter 8, "Virtualization and Cloud Computing", page 488-490. Also found in the 220-1201 objectives, section 4.1.

NEW QUESTION 81

- (Topic 1)

A financial institution needs a secure way to protect encryption keys used for unlocking chips on its credit cards. Which of the following should the institution use?

- A. TLS
- B. AMD
- C. HSM
- D. ARM

Answer: C

Explanation:

A Hardware Security Module (HSM) securely manages cryptographic keys, including those used to protect credit card chips.

Why Not A (TLS): TLS secures data in transit, not encryption key storage. Why Not B (AMD): AMD refers to processors, not security modules.

Why Not D (ARM): ARM is a processor architecture, not a cryptographic security solution. CompTIA A+ Exam Reference: Core 2 (220-1102), Section 2.5, cryptographic hardware.

NEW QUESTION 86

- (Topic 1)

A company wants to save printing costs by restricting network printer use. The company implements a solution that requires employees to authenticate to the printer to release print jobs. Which of the following has the company implemented?

- A. Access control list
- B. Audit logging
- C. Badging
- D. Print server

Answer: C

Explanation:

Badging is a form of authentication that requires employees to use a badge or ID card to release print jobs. This solution reduces unnecessary printing by ensuring only authorized users print.

Why Not A (Access control list): While ACLs manage permissions, they are not used for physical authentication at printers.

Why Not B (Audit logging): Audit logs track actions but do not restrict printer access. Why Not D (Print server): A print server manages print jobs but doesn't enforce authentication.

CompTIA A+ Exam Reference: Core 2 (220-1102), Section 2.5, authentication mechanisms.

NEW QUESTION 89

- (Topic 1)

Which of the following can a user utilize to share their mobile phone connection with their laptop?

- A. IR
- B. NFC
- C. Wi-Fi Direct
- D. Tethering

Answer: D

Explanation:

Tethering refers to sharing a mobile phone's internet connection with another device, such as a laptop, either through USB, Bluetooth, or Wi-Fi. Tethering effectively turns the mobile phone into a personal hotspot for internet access.

Option A (IR): Incorrect. Infrared (IR) is used for short-range communication, such as remote controls, but it does not support internet sharing.

Option B (NFC): Incorrect. Near-field communication (NFC) is used for close-proximity data transfer, not for internet sharing.

Option C (Wi-Fi Direct): Incorrect. Wi-Fi Direct enables device-to-device communication but does not inherently provide internet sharing.

References:

CompTIA A+ Core 1 Objectives: 1.4 (Configure basic mobile-device network connectivity)

NEW QUESTION 94

SIMULATION - (Topic 2)

A technician is installing a wireless access point and is required to run all cabling and make patch cords if necessary.

INSTRUCTIONS
















Part 1

For each cable type, click the (+) to select the appropriate connector and tool. part 2

An access point was moved and no longer has connectivity. Connect the access point, patch panel, and switch by clicking the (+) to select the appropriate cable end for each corresponding location to create a link.

The link will be visible after making the second selection of each pair. Cable ends may be used multiple times, and all placeholders will be filled.

Part 1 Part 2










	Connectors		Tools	
 LC				 Crimper
 RJ11				 Optical Crimper
 RJ45				 Punchdown

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Check the exhibit diagram for both parts.

Connectors		Tools
 RJ45		 Crimper
 LC		 Optical Crimper
 RJ11		 Crimper

A close-up of several cables
 AI-generated content may be incorrect.
 Part 2



A group of different colored rectangular objects
 AI-generated content may be incorrect.

NEW QUESTION 96

SIMULATION - (Topic 2)

A small ISP has hired a new technician Joe, the new technician, is being trained to configure customers* home networks The trailing instructor gives me technician a starter kit with cables, cable ends, and other network equipment and asks mm to build a working network.

The computer should be connected to have internet connectivity and the phone should be connected to have a dial tone.

INSTRUCTIONS

Use the appropriate cables. cable ends, tools and equipment to configure the network ana connect an components accordingly

There are 3 steps and the simulation starts on step 1.

SOHO Starter Kit Step 1 Step 2 Show Question Reset All Answers

<p style="background-color: #007bff; color: white; padding: 2px;">Connectors</p> <div style="border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;"> <p>RJ11 </p> </div> <div style="border: 1px solid #ccc; padding: 2px; margin-bottom: 5px;"> <p>RJ45 </p> </div> <div style="border: 1px solid #ccc; padding: 2px;"> <p>F Connector </p> </div>			
Tools			


SOHO Starter Kit

Step 1

Step 2

Show Question

Reset All Answers

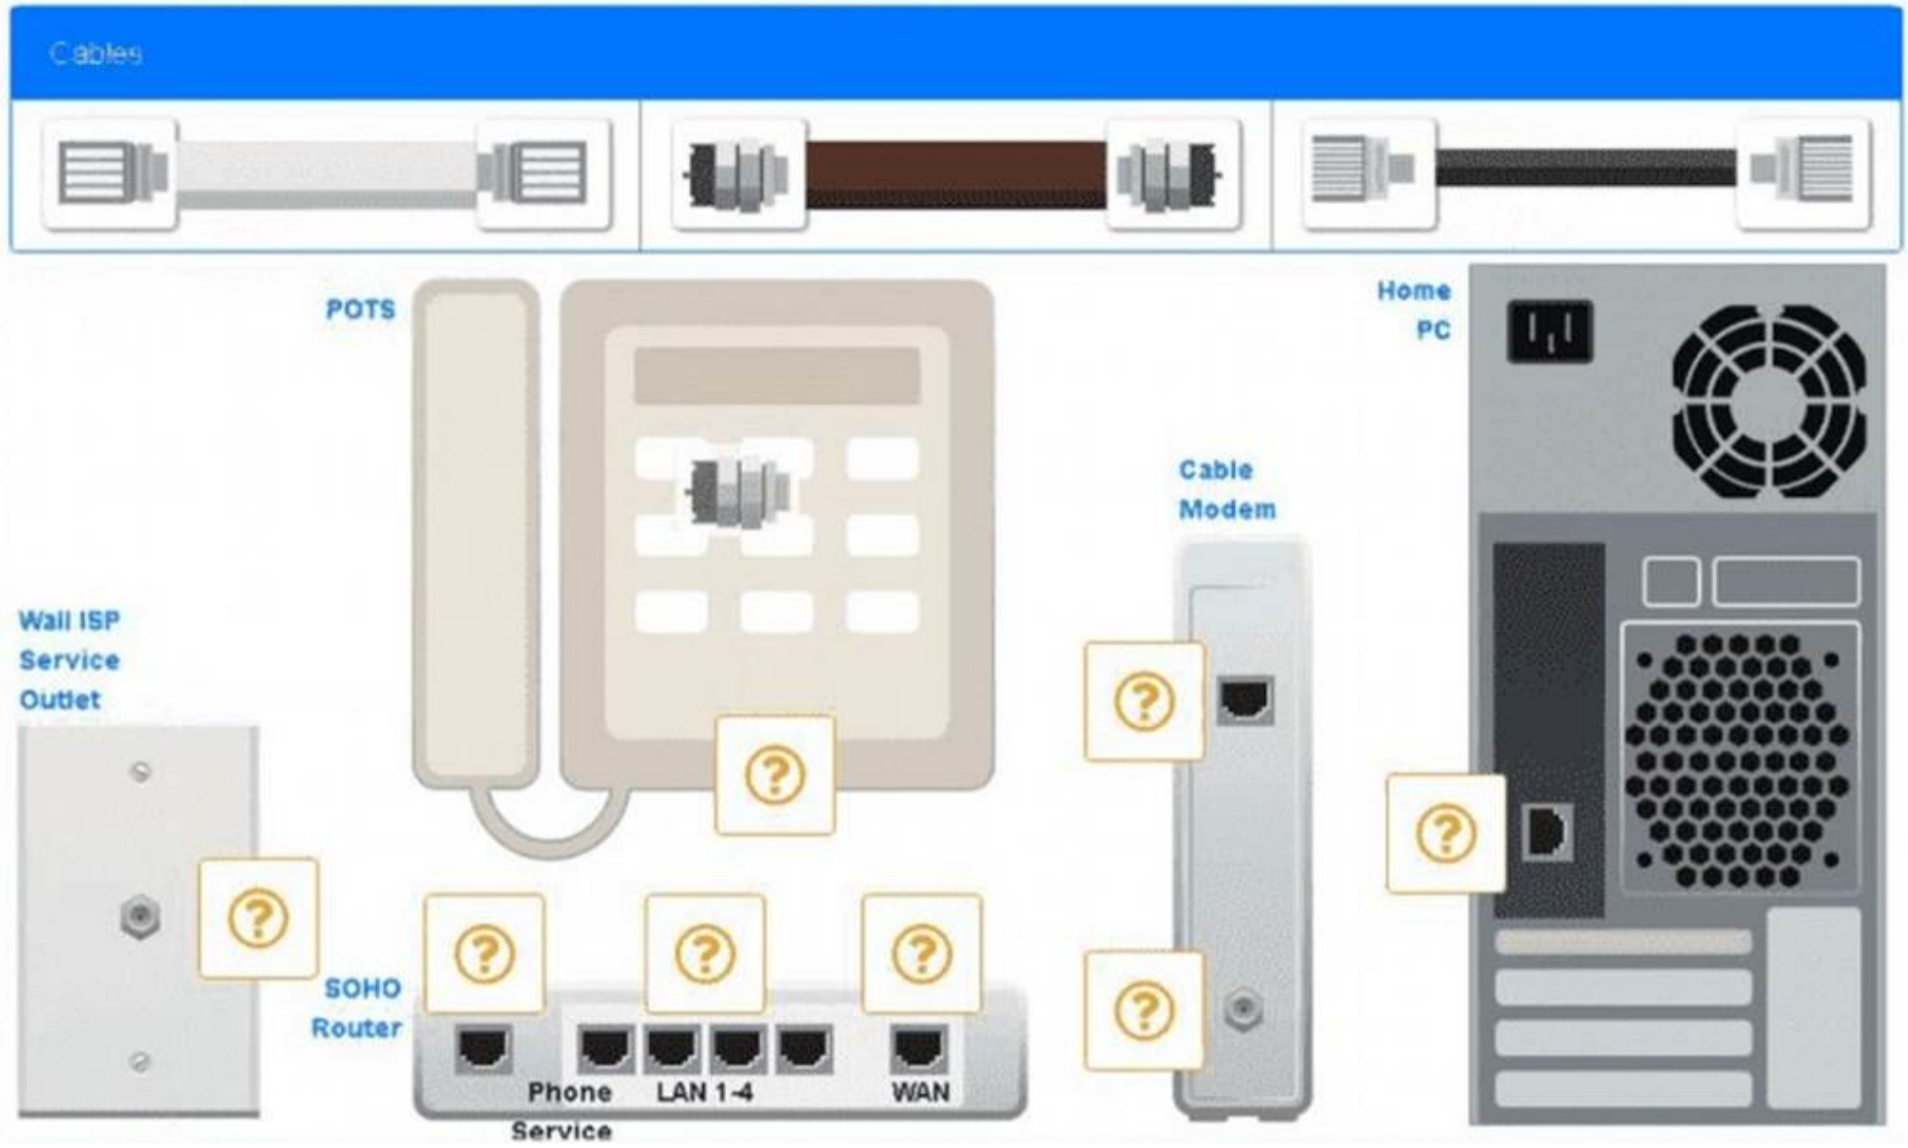


- A. Mastered
- B. Not Mastered


Answer: A

Explanation:

Answer of both steps below.

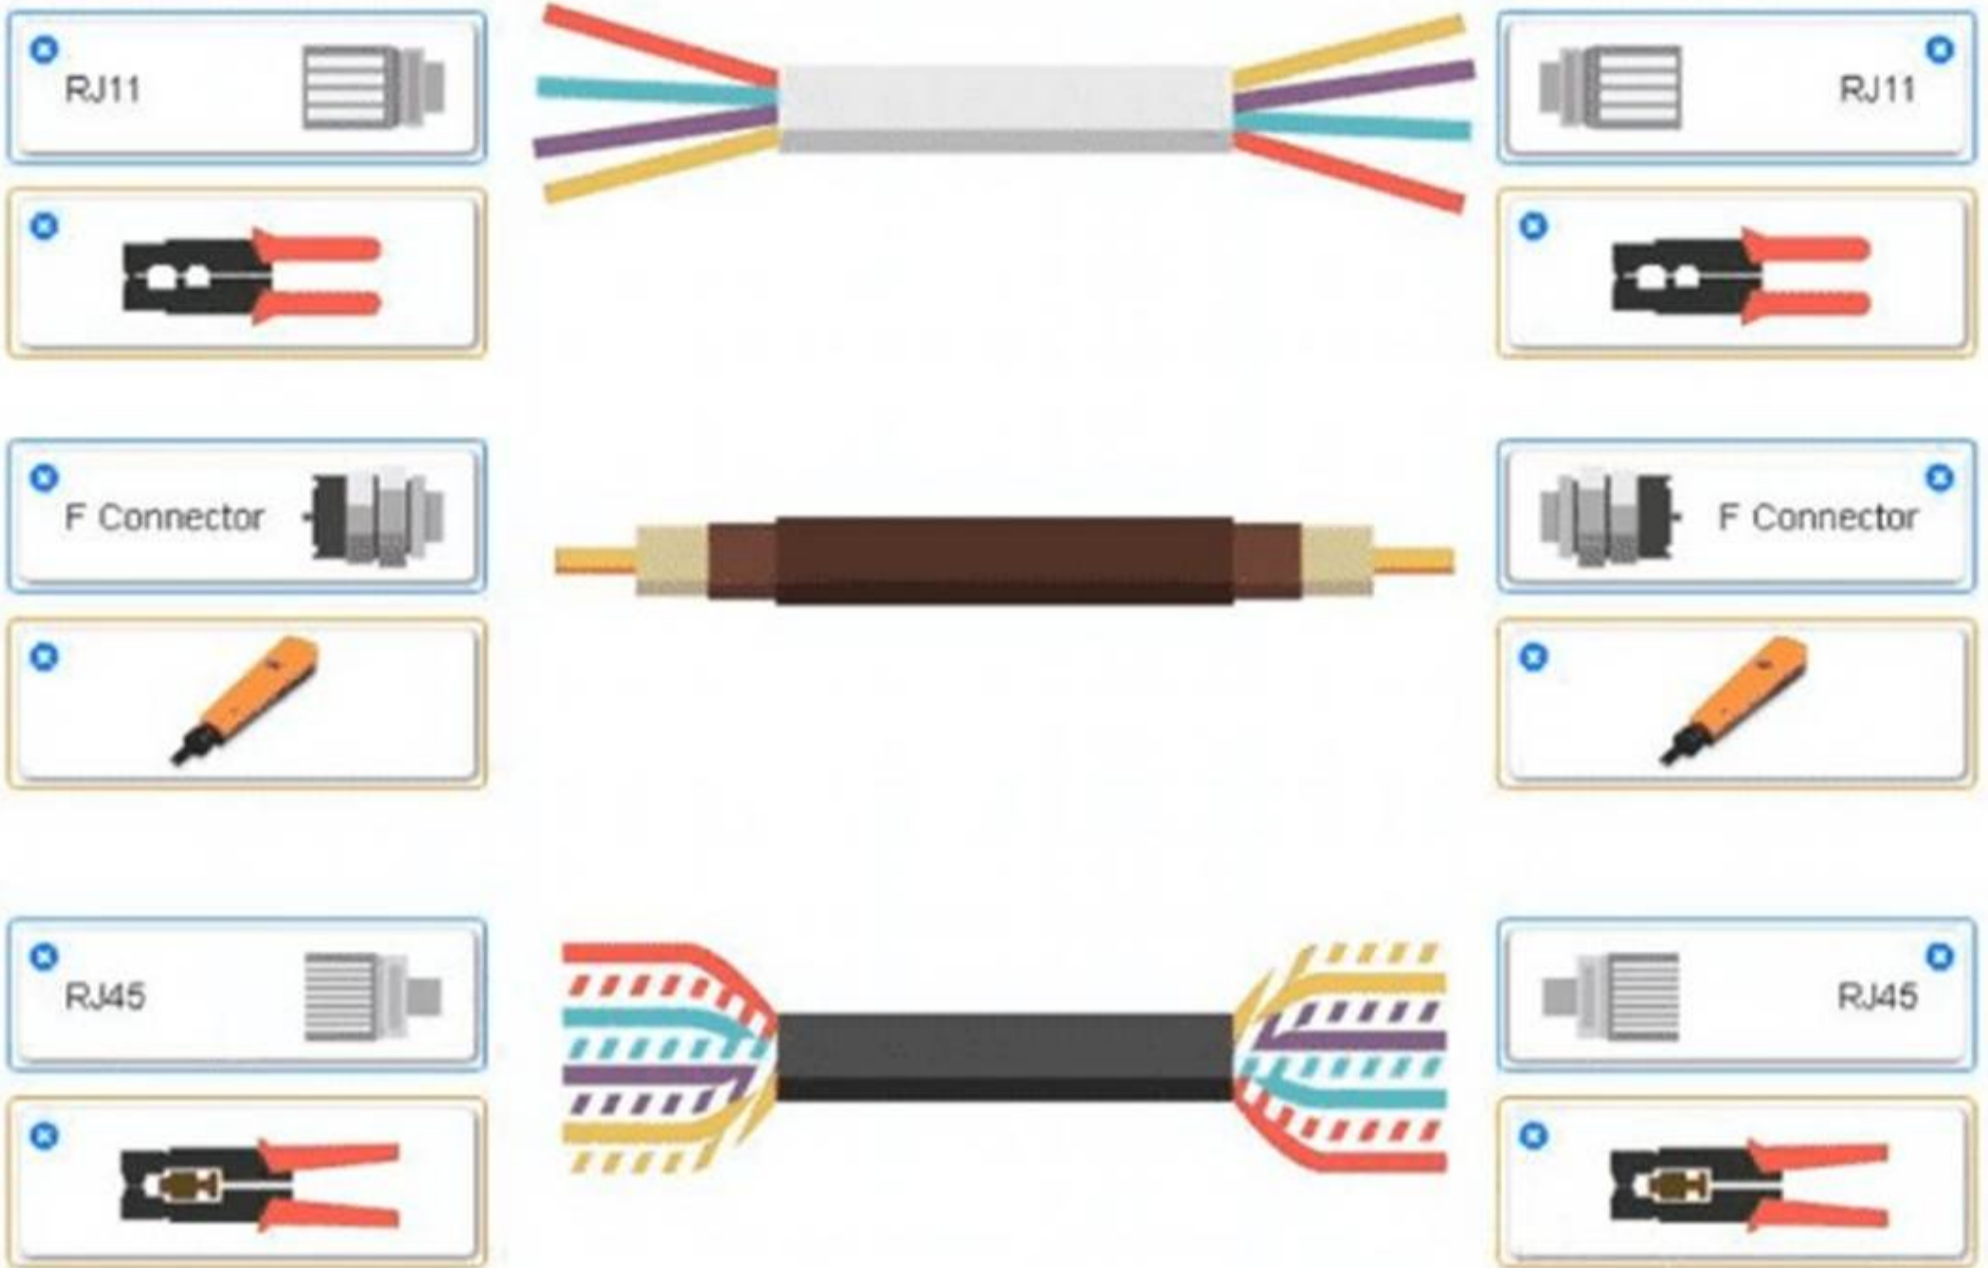

A group of wires with different colors
AI-generated content may be incorrect.

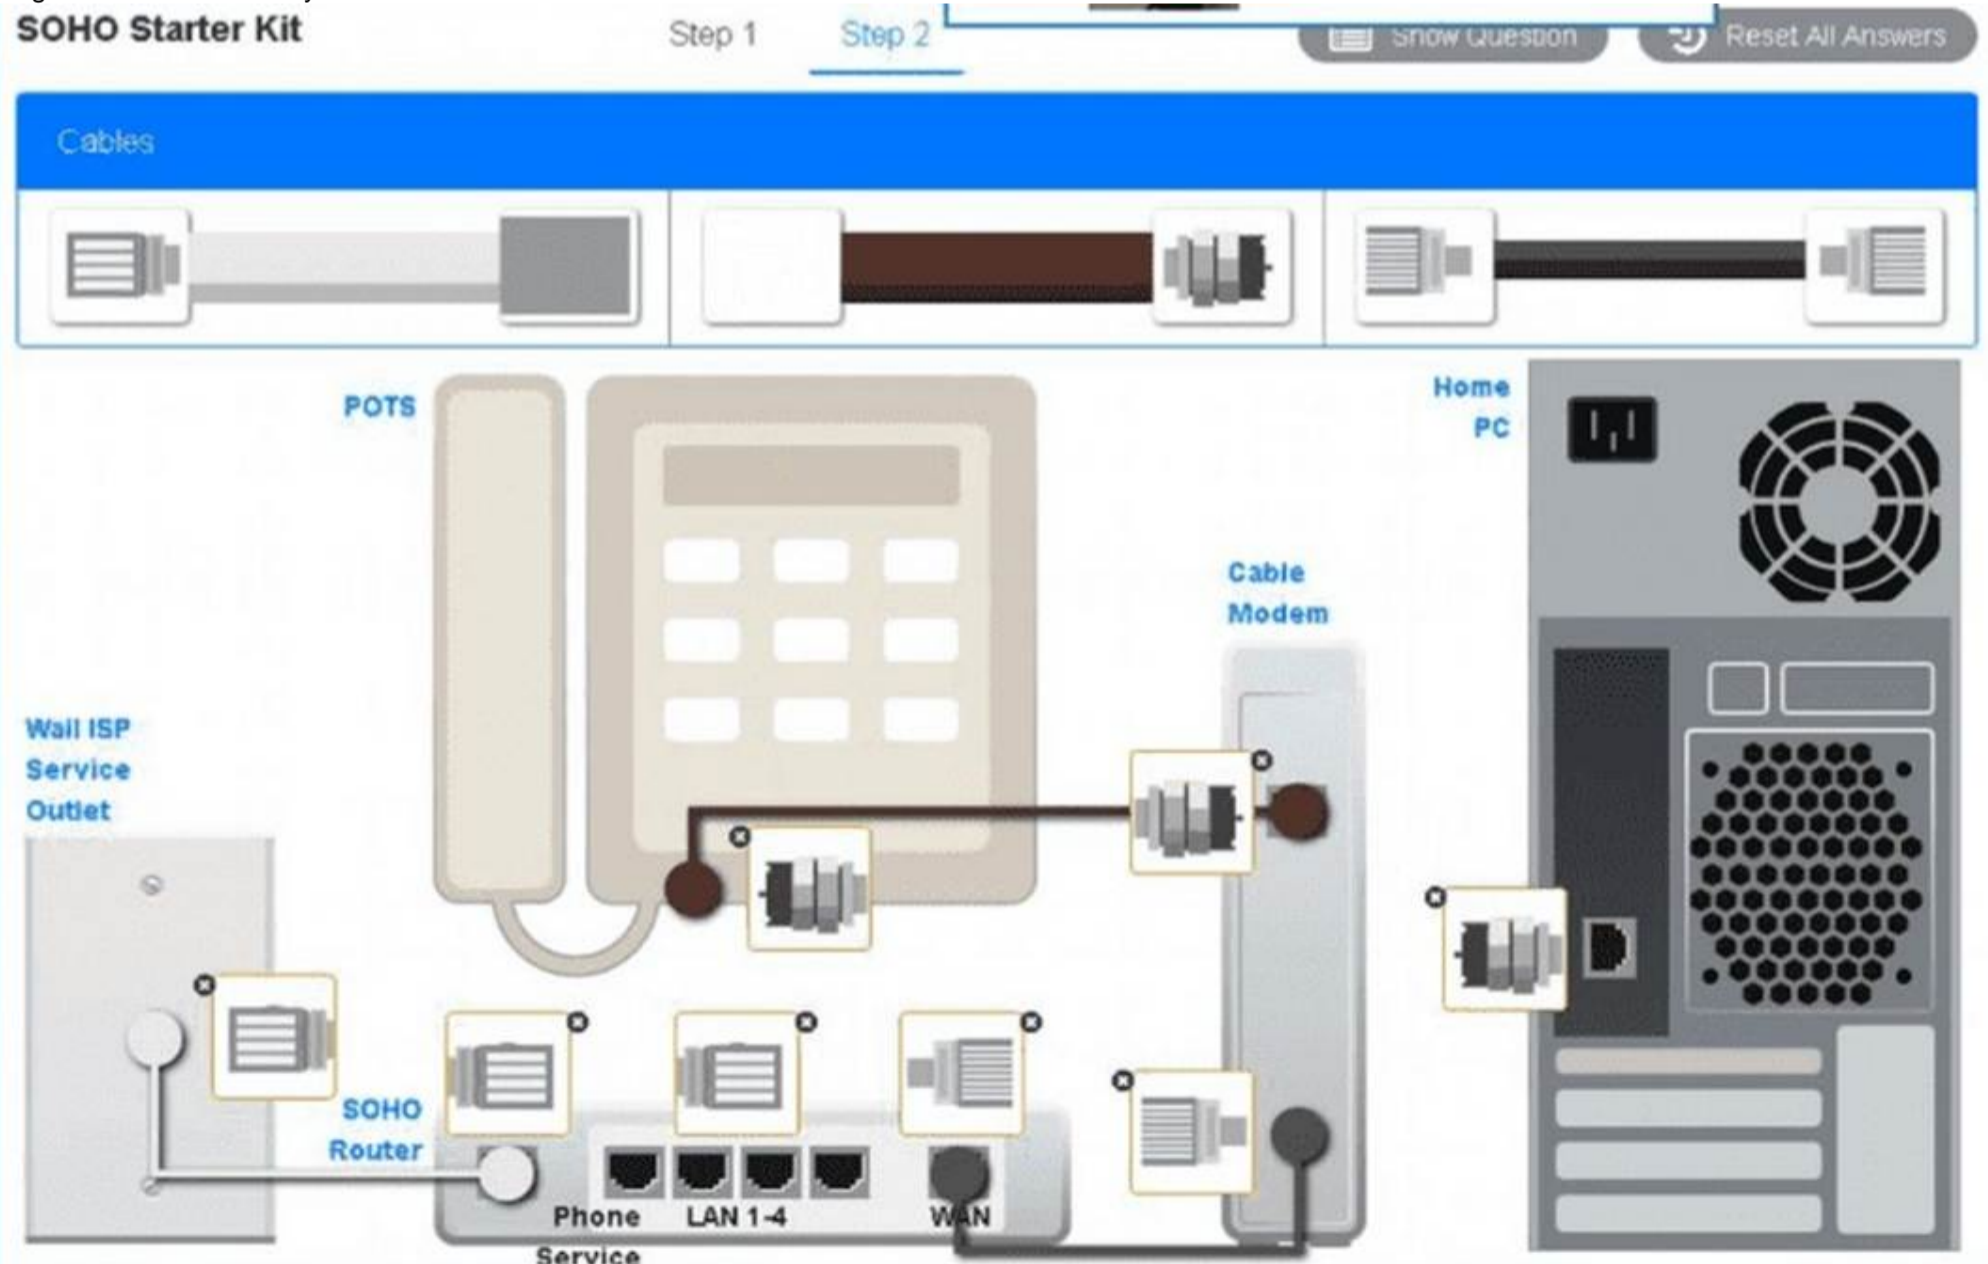

A screenshot of a computer
AI-generated content may be incorrect.

NEW QUESTION 99

SIMULATION - (Topic 2)

A user reports poor performance on the application server.

INSTRUCTIONS

Click on Server 1 and Server 2 and review the information presented in each chart to determine which drives need to be replaced.

Select the appropriate replacement drive that should be used, for the least performance degradation to the server.

If at any time you would like to bring back the initial state of the simulation, please click the Reset All button.

Status	Name	State	Layout	Bus protocol	Media	Read policy	Write policy	Stripe element size	Disk cache policy
<input checked="" type="checkbox"/>	Server 1	Ready	RAID-5	SAS	HDD	No read ahead	Write back	64KB	Disabled
<input type="checkbox"/>	Server 2	Degraded	RAID-5	SAS	HDD	No read ahead	Write back	64KB	Disabled

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

The degraded status on Server 2 indicates a RAID-5 issue, typically due to a failed or failing drive. In RAID-5 configurations, when one drive fails, the system can still operate but with reduced performance as parity data is used to rebuild missing data on-the-fly. Recommended Replacement Drive:

To minimize performance degradation, the replacement drive should be:

SAS HDD with the same specifications (64KB stripe size, no read-ahead, and write-back policy).

Matching the configuration exactly ensures seamless integration and optimizes recovery speed in the RAID-5 array.

In RAID-5, degraded performance is expected when one drive fails, as parity data needs to rebuild missing information during each read/write process. Replacing the failed drive restores the RAID array to optimal status, reducing the load on existing drives and returning the system to normal read/write performance. The write-back policy and disabled disk cache settings are designed to reduce latency and increase efficiency, essential for handling real-time applications.

A user reports poor performance on the application server.

INSTRUCTIONS

Click on Server 1 and Server 2 and review the information presented in each chart to determine which drives need to be replaced. Select the appropriate replacement drive that should be used, for the least performance degradation to the server.

Status	Name	State	Layout	Bus protocol	Media	Read policy	Write policy	Stripe element size	Disk cache policy
✓	Server 1	Ready	RAID-5	SAS	HDD	No read ahead	Write back	64KB	Disabled
⚠	Server 2	Degraded	RAID-5	SAS	HDD	No read ahead	Write back	64KB	Disabled

A computer server with many black and silver parts
 AI-generated content may be incorrect. A computer server with many black boxes Description automatically generated with medium confidence

Server 1

Status	Name	State	Size	Media	Speed	Failure predicted
✓	Physical disk 1:2	Online	4TB	HDD	15k rpm	Yes
✓	Physical disk 1:3	Online	4TB	HDD	15k rpm	No
✓	Physical disk 1:4	Online	4TB	HDD	15k rpm	No
✓	Physical disk 1:5	Online	4TB	HDD	15k rpm	No


A screen shot of a computer
 AI-generated content may be incorrect. A screen shot of a computer Description automatically generated

Server 1, Drive bay 3

Size	Interface	Rotational speed
4TB v	HDD	15k rpm

A computer screen shot of a computer
 AI-generated content may be incorrect. A computer screen shot of a computer Description automatically generated

Server 1, Drive bay 4 ✕



Size	Interface	Rotational speed
4TB v	HDD	15k rpm

A computer screen shot of a computer
 AI-generated content may be incorrect.A computer screen shot of a computer Description automatically generated


Server 1, Drive bay 5 ✕



Size	Interface	Rotational speed
4TB v	HDD	15k rpm

A computer screen shot of a computer
 AI-generated content may be incorrect.A computer screen shot of a computer Description automatically generated

Server 2, Drive bay 2 ✕



Size	Interface	Rotational speed
2TB v	HDD	7200rpm
8TB	SAS	5400rpm
4TB	SATA	7200rpm
2TB	SATA	SSD

Layout	Bus protocol	Media
RAID-5	SAS	HD
RAID-5	SAS	HD

A screenshot of a computer
 AI-generated content may be incorrect.A screenshot of a computer Description automatically generated

Server 2, Drive bay 3
✕

Size	Interface	Rotational speed
2TB v	HDD	7200rpm
8TB	SAS	5400rpm
4TB	SATA	7200rpm
2TB	SATA	SSD
1TB	SAS	10k rpm
4TB	SAS	15k rpm
4TB	SAS	10k rpm
4TB	SATA	SSD

A screenshot of a computer
 AI-generated content may be incorrect. A screenshot of a computer Description automatically generated

NEW QUESTION 103

HOTSPOT - (Topic 2)

A technician is diagnosing several device issues reported by employees.

INSTRUCTIONS

Click on each device to review the issue. Then select the appropriate issue and solution from the drop-down menu. Each option may be used more than once.



- A. Mastered
- B. Not Mastered

Answer: A

Explanation:



A screenshot of a computer
AI-generated content may be incorrect.

NEW QUESTION 105

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questions and Answers in PDF Format

220-1201 Practice Exam Features:

- * 220-1201 Questions and Answers Updated Frequently
- * 220-1201 Practice Questions Verified by Expert Senior Certified Staff
- * 220-1201 Most Realistic Questions that Guarantee you a Pass on Your First Try
- * 220-1201 Practice Test Questions in Multiple Choice Formats and Updates for 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The 220-1201 Practice Test Here](#)