

Microsoft

Exam Questions AZ-104

Microsoft Azure Administrator



NEW QUESTION 1

- (Topic 5)
You have an Azure subscription. The subscription contains virtual machines that connect to a virtual network named VNet1.
You plan to configure Azure Monitor for VM Insights.
You need to ensure that all the virtual machines only communicate with Azure Monitor through VNet1.
What should you create first?

- A. an Azure Monitor Private Link Scope (AMPIS)
- B. a private endpoint
- C. a Log Analytics workspace
- D. a data collection rule (DCR)

Answer: A

Explanation:

Azure Monitor for VM Insights is a feature of Azure Monitor that provides comprehensive monitoring and diagnostics for your Azure virtual machines and virtual machine scale sets. It collects performance data, process information, and network dependencies from your virtual machines and displays them in interactive charts and maps. You can use Azure Monitor for VM Insights to troubleshoot performance issues, optimize resource utilization, and identify network bottlenecks1. To enable Azure Monitor for VM Insights, you need to install two agents on your virtual machines: the Azure Monitor agent (preview) and the Dependency agent. The Azure Monitor agent collects performance metrics and sends them to a Log Analytics workspace. The Dependency agent collects process information and network dependencies and sends them to the InsightsMetrics table in the same workspace2. By default, the agents communicate with Azure Monitor over the public internet. However, if you want to ensure that all the virtual machines only communicate with Azure Monitor through a virtual network named VNet1, you need to configure private network access for the agents. Private network access allows the agents to communicate with Azure Monitor using a private endpoint, which is a special network interface that connects your virtual network to an Azure service without exposing it to the public internet. A private endpoint uses a private IP address from your virtual network address space, so you can secure and control the network traffic between your virtual machines and Azure Monitor3. To configure private network access for the agents, you need to create an Azure Monitor Private Link Scope (AMPIS) first. An AMPIS is a resource that groups one or more Log Analytics workspaces together and associates them with a private endpoint. An AMPIS allows you to manage the private connectivity settings for multiple workspaces in one place4. After creating an AMPIS, you need to create a private endpoint in VNet1 and link it to the AMPIS. This will enable the agents on your virtual machines to send data to the Log Analytics workspaces in the AMPIS using the private IP address of the private endpoint5.

NEW QUESTION 2

HOTSPOT - (Topic 5)
You have an Azure subscription that contains the vaults shown in the following table.

Name	Type
Backup1	Backup vault
Recovery1	Recovery Services vault

You create a storage account that contains the resources shown in the following table.

Name	Type
cont1	Blob container
share1	File share

To which vault can you back up cont1 and share1? To answer, select the appropriate options in the answer area. NOTE: Each correct answer is worth one point.

Answer Area

cont1:

Backup1 only

Backup1 only

Recovery1 only

Backup1 or Recovery1

Cannot be backed up to Backup1 or Recovery1

share1:

Recovery1 only

Backup1 only

Recovery1 only

Backup1 or Recovery1

Cannot be backed up to Backup1 or Recovery1

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

cont1:

Backup1 only

Backup1 only

Recovery1 only

Backup1 or Recovery1

Cannot be backed up to Backup1 or Recovery1

share1:

Recovery1 only

Backup1 only

Recovery1 only

Backup1 or Recovery1

Cannot be backed up to Backup1 or Recovery1

NEW QUESTION 3

- (Topic 5)
You have an Azure subscription that contains two Log Analytics workspaces named Workspace 1 and Workspace? and 100 virtual machines that run Windows Server.
You need to collect performance data and events from the virtual machines. The solution must meet the following requirements:

- Logs must be sent to Workspace! and Workspace?
- All Windows events must be captured
- All security events must be captured.

What should you install and configure on each virtual machine?

- A. the Azure Monitor agent
- B. the Windows Azure diagnostics extension (WAD)
- C. the Windows VM agent

Answer: A

Explanation:
<https://learn.microsoft.com/en-us/azure/azure-monitor/agents/agents-overview> Azure Monitor Agent (AMA) collects monitoring data from the guest operating system of Azure and hybrid virtual machines and delivers it to Azure Monitor for use by features, insights, and other services, such as Microsoft Sentinel and Microsoft Defender for Cloud. Azure Monitor Agent replaces all of Azure Monitor's legacy monitoring agents.

NEW QUESTION 4

HOTSPOT - (Topic 5)
You have an Azure Load Balancer named LB1.
You assign a user named User1 the roles shown in the following exhibit.

User1 assignments - LB1

Assignments for the selected user, group, service principal, or managed identity at this scope or inherited to this scope.

Search by assignment name or description

Answer Area

User1 can [answer choice] LB1.

delete

create a NAT rule for

assign access to other users for

User1 can [answer choice] the resource group.

delete a virtual machine from

modify the load balancing rules in

deploy an Azure Kubernetes Service (AKS) cluster to

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:
User Access Administrator can only assign access to other users
<https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles>
Virtual Machine Contributor can Manage VMs, which includes deleting VMs too. <https://docs.microsoft.com/en-us/azure/role-based-access-control/built-in-roles#virtual-machine-contributor>
<https://docs.microsoft.com/en-us/answers/questions/350635/can-virtual-machine-contributor-create-vm.html>

NEW QUESTION 5

- (Topic 5)
You have an Azure subscription that contains the resources in the following table.

Name	Type	Details
VNet1	Virtual network	<i>Not applicable</i>
Subnet1	Subnet	Hosted on VNet1
VM1	Virtual machine	On Subnet1
VM2	Virtual machine	On Subnet1

VM1 and VM2 are deployed from the same template and host line-of-business applications accessed by using Remote Desktop. You configure the network security group (NSG) shown in the exhibit. (Click the Exhibit button.)

→ Move

🗑 Delete

Resource group (change)

ProductionRG

Location

North Europe

Subscription (change)

Production subscription

Subscription ID

14d26092-8e42-4ea7-b770-9dcef70fb1ea

Tags (change)

Click here to add tags

Security rules

1 inbound, 1 outbound

Associated with

0 subnets, 0 network interfaces

⌆

Inbound security rules

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
1500	Port_80	80	TCP	Internet	Any	❌ Deny ...
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	✅ Allow ...
65001	AllowAzureLoadBalancerInBound	Any	Any	AzureLoadBalancer	Any	✅ Allow ...
65500	DenyAllBound	Any	Any	Any	Any	❌ Deny ...

Outbound security rules

PRIORITY	NAME	PORT	PROTOCOL	SOURCE	DESTINATION	ACTION
1000	DenyWebSites	80	TCP	Any	Internet	❌ Deny ...
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	✅ Allow ...
65001	AllowInternetOutBound	Any	Any	Any	Internet	✅ Allow ...
65500	DenyAllOutBound	Any	Any	Any	Any	❌ Deny ...

You need to prevent users of VM1 and VM2 from accessing websites on the Internet. What should you do?

- A. Associate the NSG to Subnet1.
- B. Disassociate the NSG from a network interface.
- C. Change the DenyWebSites outbound security rule.
- D. Change the Port_80 inbound security rule

Answer: A

Explanation:

Outbound rule “DenyWebSites” is setup correctly to block outbound internet traffic over port 80. In the screenshot it states, "Associated with: 0 subnets, 0 NIC's", so you need to associate the NSG to Subnet1.You can associate or dissociate a network security group from a NIC or Subnet. Reference: <https://docs.microsoft.com/en-us/azure/virtual-network/manage-network-security-group>

NEW QUESTION 6

- (Topic 5)

You deploy an Azure Kubernetes Service (AKS) cluster named Cluster1 that uses the IP addresses shown in the following table.

IP address	Assigned to
131.107.2.1	Load balancer front end
192.168.10.2	Kubernetes DNS service
172.17.7.1	Docker bridge address
10.0.10.11	Kubernetes cluster node

You need to provide internet users with access to the applications that run in Cluster1. Which IP address should you include in the DNS record for Ousted?

- A. 172.17.7.1
- B. 131.107.2.1
- C. 192.168.10.2
- D. 10.0.10.11

Answer: B

Explanation:

When any internet user will try to access the cluster which is behind a load balancer, traffic will first hit to load balancer front end IP. So in the DNS configuration you have to provide the IP address of the load balancer.

Reference:

<https://stackoverflow.com/questions/43660490/giving-a-dns-name-to-azure-load-balancer>

NEW QUESTION 7

- (Topic 5)

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Resource group
VNET1	Virtual network	RG1
VM1	Virtual machine	RG1

The Not allowed resource types Azure policy that has policy enforcement enabled is assigned to RG1 and uses the following parameters:

Microsoft.Network/virtualNetworks Microsoft.Compute/virtualMachines

In RG1, you need to create a new virtual machine named VM2 which is connected to VNET1. What should you do first?

Create an Azure Resource Manager template.

A. Add a subnet to VNET1.

C. Remove Microsoft

D. Network/virtualNetworks from the policy.

E. Remove Microsoft.Compute/virtualMachines from the policy.

Answer: C

Explanation:

To create a new virtual machine named VM2 which is connected to VNET1 in RG1, you need to remove Microsoft.Network/virtualNetworks from the policy. This is because the Not allowed resource types Azure policy denies the deployment of the specified resource types in the scope of the assignment. In this case, the policy is assigned to RG1 and uses the parameters Microsoft.Network/virtualNetworks and Microsoft.Compute/virtualMachines. This means that you cannot create or update any virtual networks or virtual machines in RG1. Therefore, to create VM2 and connect it to VNET1, you need to remove Microsoft.Network/virtualNetworks from the policy parameters. This will allow you to create or update virtual networks in RG1, but still prevent you from creating or updating virtual machines. Alternatively, you can also exclude VNET1 from the policy assignment scope, but this will affect the compliance of the policy for the entire virtual network.

References:

? Not allowed resource types (Deny)

? Create and manage policies to enforce compliance

NEW QUESTION 8

DRAG DROP - (Topic 5)

You have an Azure Active Directory (Azure AD) tenant that has the initial domain name. You have a domain name of contoso.com registered at a third-party registrar.

You need to ensure that you can create Azure AD users that have names containing a suffix of @contoso.com.

Which three actions should you perform in sequence? To answer, move the appropriate cmdlets from the list of cmdlets to the answer area and arrange them in the correct order.

Actions

Answer Area

Configure company branding.

Add an Azure AD tenant.

Verify the domain.

Create an Azure DNS zone.

Add a custom domain name.

Add a record to the public contoso.com DNS zone.



A. Mastered

B. Not Mastered

Answer: A

Explanation:

The process is simple:

? Add the custom domain name to your directory

? Add a DNS entry for the domain name at the domain name registrar

? Verify the custom domain name in Azure AD

References: <https://docs.microsoft.com/en-us/azure/dns/dns-web-sites-custom-domain>

NEW QUESTION 9

- (Topic 5)
You have an Azure subscription that contains two virtual machines named VM1 and VM2. You create an Azure load balancer. You plan to create a load balancing rule that will load balance HTTPS traffic between VM1 and VM2. Which two additional load balance resources should you create before you can create the load balancing rule? Each correct answer presents part of the solution. MOTL Each correct selection is worth one point.

- A. a frontend IP address
- B. a backend pool
- C. a health probe
- D. an inbound NAT rule
- E. a virtual network

Answer: AC

Explanation:

To create a load balancing rule that will load balance HTTPS traffic between VM1 and VM2, you need to create two additional load balance resources: a frontend IP address and a health probe.

A frontend IP address is the IP address that the clients use to access the load balancer. It can be either public or private, depending on the type of load balancer. A frontend IP address is required for any load balancing rule1.

A health probe is used to monitor the health and availability of the backend instances. It can be either TCP, HTTP, or HTTPS, depending on the protocol of the load balancing rule. A health probe is required for any load balancing rule1.

A backend pool is a group of backend instances that receive the traffic from the load balancer. You already have a backend pool that contains VM1 and VM2, so you don't need to create another one.

An inbound NAT rule is used to forward traffic from a specific port on the frontend IP address to a specific port on a backend instance. It's not required for a load balancing rule, but it can be used to access individual instances for troubleshooting or maintenance purposes1.

A virtual network is a logical isolation of Azure resources within a region. It's not a load balance resource, but it's required for creating an internal load balancer or connecting virtual machines to a load balancer2.

NEW QUESTION 10

- (Topic 5)
You have an Azure subscription that uses the public IP addresses shown in the following table.

Name	IP version	SKU	IP address assignment	Availability zone
IP1	IPv6	Basic	Static	Not applicable
IP2	IPv6	Basic	Dynamic	Not applicable
IP3	IPv6	Standard	Static	Zone-redundant

You need to create a public Azure Standard Load Balancer. Which public IP addresses can you use?

- A. IP1 and IP3 only
- B. IP1, IP2, and IP3
- C. IP2 only
- D. IP3 only

Answer: D

Explanation:

A Basic Load Balancer can use the Basic SKU Public IP address's, but a Standard load balancer requires a Standard SKU Public IP address.

Excerpt from link below:
The standard SKU is required if you associate the address to a standard load balancer. For more information about standard load balancers, see Azure load balancer standard SKU.
<https://learn.microsoft.com/en-us/azure/virtual-network/ip-services/virtual-network-public-ip-address>

Excerpt from link below:
Key scenarios that you can accomplish using Azure Standard Load Balancer include:
-Enable support for load-balancing of IPv6.
<https://learn.microsoft.com/en-us/azure/load-balancer/load-balancer-overview#why-use-azure-load-balancer>

NEW QUESTION 10

- (Topic 5)
You have an Azure Active Directory (Azure AD) tenant named contoso.com. You have a CSV file that contains the names and email addresses of 500 external users. You need to create a guest user account in contoso.com for each of the 500 external users. Solution: You create a Power Shell script that runs the New-MgUser cmdlet for each user. Does this meet the goal?

- A. Yes
- B. NO

Answer: B

Explanation:

[https://learn.microsoft.com/en-us/active-directory/external-identities/tutorial-bulk-invite?source=recommendations](https://learn.microsoft.com/en-us/azure/active-directory/external-identities/tutorial-bulk-invite?source=recommendations)

NEW QUESTION 15

HOTSPOT - (Topic 5)

You manage two Azure subscriptions named Subscription 1 and Subscription2. Subscription1 has following virtual networks:

Name	Address space	Region
VNET1	10.10.10.0/24	West Europe
VNET2	172.16.0.0/16	West US

The virtual networks contain the following subnets:

Name	Address range	In virtual network
Subnet11	10.10.10.0/24	VNET1
Subnet21	172.16.0.0/18	VNET2
Subnet22	172.16.128.0/18	VNET2

Subscription2 contains the following virtual network:

- Name: VNETA
- Address space: 10.10.128.0/17
- Region: Canada Central

VNETA contains the following subnets:

Name	Address range
SubnetA1	10.10.130.0/24
SubnetA2	10.10.131.0/24

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
A Site-to-Site connection can be established between VNET1 and VNET2.	<input type="radio"/>	<input type="radio"/>
VNET1 and VNET2 can be peered.	<input type="radio"/>	<input type="radio"/>
VNET1 and VNETA can be peered.	<input type="radio"/>	<input type="radio"/>

Answer:

Answer Area

Statements	Yes	No
A Site-to-Site connection can be established between VNET1 and VNET2.	<input checked="" type="radio"/>	<input type="radio"/>
VNET1 and VNET2 can be peered.	<input checked="" type="radio"/>	<input type="radio"/>
VNET1 and VNETA can be peered.	<input type="radio"/>	<input checked="" type="radio"/>

- A. Mastered
B. Not Mastered

Answer: A

NEW QUESTION 19

HOTSPOT - (Topic 5)

You need to configure a new Azure App Service app named WebApp1. The solution must meet the following requirements:

- WebApp1 must be able to verify a custom domain name of app.contoso.com.
- WebApp1 must be able to automatically scale up to eight instances.
- Costs and administrative effort must be minimized.

Which pricing plan should you choose, and which type of record should you use to verify the domain? To answer, select the appropriate options in the answer area.

NOTE: Each correct answer is worth one point.

Answer Area

Pricing plan:

Standard

Basic

Free

Shared

Standard

Record type:

TXT

A

AAAA

PTR

TXT

Answer:

Answer Area

Pricing plan:

Standard

Basic

Free

Shared

Standard

Record type:

TXT

A

AAAA

PTR

TXT

- A. Mastered
- B. Not Mastered

Answer: A

NEW QUESTION 24

- (Topic 5)
You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	Azure region: East US Contains the following subnets: <ul style="list-style-type: none">Subnet1: 172.16.1.0/24Subnet2: 172.16.2.0/24Subnet3: 172.16.3.0/24
VNET2	Virtual network	Azure region: West US Contains the following subnets: <ul style="list-style-type: none">DemoSubnet1: 172.16.1.0/24RecoverySubnetA: 172.16.5.0/24RecoverySubnetB: 172.16.3.0/24TestSubnet1:172.16.2.0/24
VM1	Virtual machine	Connected to Subnet2

You configure Azure Site Recovery to replicate VM1 between the East US and West US regions. You perform a test failover of VM1 and specify VNET2 as the target virtual network. When the test version of VM1 is created, to which subnet will the virtual machine be connected?

- A. Testsubnet1
- B. RecoverySubnetB
- C. DemoSubnet1

RecoverySubnetA

D.

Answer: A

Explanation:

<https://learn.microsoft.com/en-us/azure/site-recovery/azure-to-azure-network-mapping>
The subnet of the target VM is selected based on the name of the subnet of the source VM.
- If a subnet with the same name as the source VM subnet is available in the target network, that subnet is set for the target VM.
- If a subnet with the same name doesn't exist in the target network, the first subnet in the alphabetical order is set as the target subnet.

NEW QUESTION 26

HOTSPOT - (Topic 5)

You have an Azure subscription that contains a resource group named RG1.


You plan to use an Azure Resource Manager (ARM) template named template1 to deploy resources. The solution must meet the following requirements:

- Deploy new resources to RG1.
- Remove all the existing resources from RG1 before deploying the new resources.

How should you complete the command? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

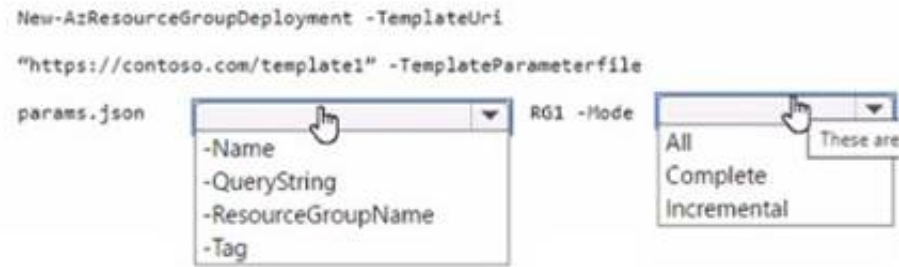

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

<https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-9.3.0#-resourcegroupname> Specifies the name of the resource group to deploy.

<https://learn.microsoft.com/en-us/powershell/module/az.resources/new-azresourcegroupdeployment?view=azps-9.3.0#-mode>

Specifies the deployment mode. The acceptable values for this parameter are:

- Complete: In complete mode, Resource Manager deletes resources that exist in the resource group but are not specified in the template.
- Incremental: In incremental mode, Resource Manager leaves unchanged resources that exist in the resource group but are not specified in the template.

NEW QUESTION 28

- (Topic 5)

You create an Azure Storage account.

You plan to add 10 blob containers to the storage account.

For one of the containers, you need to use a different key to encrypt data at rest. What should you do before you create the container?

- A. Modify the minimum TLS version.
- B. Create an encryption scope.
- C. Generate a shared access signature (SAS).
- D. Rotate the access keys.

Answer: B

Explanation:

<https://learn.microsoft.com/en-us/azure/storage/blobs/encryption-scope-overview#how-encryption-scopes-work>

NEW QUESTION 29

- (Topic 4)

You need to identify which storage account to use for the flow logging of IP traffic from VM5. The solution must meet the retention requirements.

Which storage account should you identify?

- A. storage4
- B. storage1
- C. storage2
- D. storage3

Answer: D

NEW QUESTION 30

- (Topic 3)

You need to implement a backup solution for App1 after the application is moved. What should you create first?

- A. a recovery plan
- B. an Azure Backup Server
- C. a backup policy
- D. a Recovery Services vault

Answer: D

Explanation:

A Recovery Services vault is a logical container that stores the backup data for each

protected resource, such as Azure VMs. When the backup job for a protected resource runs, it creates a recovery point inside the Recovery Services vault.

Scenario:

There are three application tiers, each with five virtual machines. Move all the virtual machines for App1 to Azure.

Ensure that all the virtual machines for App1 are protected by backups. References: <https://docs.microsoft.com/en-us/azure/backup/quick-backup-vm-portal>

NEW QUESTION 33

- (Topic 3)

You need to meet the user requirement for Admin1. What should you do?

- A. From the Subscriptions blade, select the subscription, and then modify the Properties.
- B. From the Subscriptions blade, select the subscription, and then modify the Access control (IAM) settings.
- C. From the Azure Active Directory blade, modify the Properties.
- D. From the Azure Active Directory blade, modify the Groups.

Answer: A

Explanation:

Change the Service administrator for an Azure subscription

? Sign in to Account Center as the Account administrator.

? Select a subscription.

? On the right side, select Edit subscription details.

Scenario: Designate a new user named Admin1 as the service administrator of the Azure subscription.

References: <https://docs.microsoft.com/en-us/azure/billing/billing-add-change-azure-subscription-administrator>

NEW QUESTION 36

- (Topic 2)

You need to prepare the environment to meet the authentication requirements.

Which two actions should you perform? Each correct answer presents part of the solution. NOTE Each correct selection is worth one point.

- A. Azure Active Directory (AD) Identity Protection and an Azure policy
- B. a Recovery Services vault and a backup policy

- C. an Azure Key Vault and an access policy
- D. an Azure Storage account and an access policy

Answer: C

Explanation:

D: Seamless SSO works with any method of cloud authentication - Password Hash Synchronization or Pass-through Authentication, and can be enabled via Azure AD Connect.

B: You can gradually roll out Seamless SSO to your users. You start by adding the following Azure AD URL to all or selected users' Intranet zone settings by using Group Policy in Active Directory: <https://autologon.microsoftazuread-ssso.com>

NEW QUESTION 38

- (Topic 2)

You need to define a custom domain name for Azure AD to support the planned infrastructure.

Which domain name should you use?

- A. Join the client computers in the Miami office to Azure AD.
- B. Add <http://autologon.microsoftazuread-ssso.com> to the intranet zone of each client computer in the Miami office.
- C. Allow inbound TCP port 8080 to the domain controllers in the Miami office.
- D. Install Azure AD Connect on a server in the Miami office and enable Pass-through Authentication
- E.

Install the Active Directory Federation Services (AD FS) role on a domain controller in the Miami office.

Answer: BD

Explanation:

Every Azure AD directory comes with an initial domain name in the form of domainname.onmicrosoft.com. The initial domain name cannot be changed or deleted, but you can add your corporate domain name to Azure AD as well. For example, your organization probably has other domain names used to do business and users who sign in using your corporate domain name. Adding custom domain names to Azure AD allows you to assign user names in the directory that are familiar to your users, such as 'alice@contoso.com.' instead of 'alice@domain name.onmicrosoft.com'.

Scenario:

Network Infrastructure: Each office has a local data center that contains all the servers for that office. Each office has a dedicated connection to the Internet.

Humongous Insurance has a single-domain Active Directory forest named humongousinsurance.com

Planned Azure AD Infrastructure: The on-premises Active Directory domain will be synchronized to Azure AD.

References: <https://docs.microsoft.com/en-us/azure/active-directory/fundamentals/add-custom-domain>

NEW QUESTION 43

- (Topic 1)

You need to ensure that VM1 can communicate with VM4. The solution must minimize administrative effort.

What should you do?

- A. Create a user-defined route from VNET1 to VNET3.
- B. Assign VM4 an IP address of 10.0.1.5/24.
- C. Establish peering between VNET1 and VNET3.
- D. Create an NSG and associate the NSG to VMI and VM4.

Answer: B

Explanation:

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/tutorial-site-to-site-portal>

NEW QUESTION 46

- (Topic 1)

You need to recommend a solution to automate the configuration for the finance department users. The solution must meet the technical requirements. What should you include in the recommended?

- A. Azure AP B2C
- B. Azure AD Identity Protection
- C. an Azure logic app and the Microsoft Identity Management (MIM) client
- D. dynamic groups and conditional access policies

Answer: D

Explanation:

Technically, The finance department needs to migrate their users from AD to AAD using AADC based on the finance OU, and need to enforce MFA use. This is conditional access policy. Employees also often get promotions and/or join other departments and when that occurs, the user's OU attribute will change when the admin puts the user in a new OU, and the dynamic group conditional access exception (OU= [Department Name Value]) will move the user to the appropriate dynamic group on next AADC delta sync.

<https://docs.microsoft.com/en-us/azure/active-directory/enterprise-users/groups-dynamic-membership>

<https://docs.microsoft.com/en-us/azure/active-directory/conditional-access/overview> <https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-mfa-userstates>

NEW QUESTION 51

- (Topic 1)

You need to meet the technical requirement for VM4. What should you create and configure?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Scenario: Create a workflow to send an email message when the settings of VM4 are modified.

You can start an automated logic app workflow when specific events happen in Azure resources or third-party resources. These resources can publish those events to an Azure event grid. In turn, the event grid pushes those events to subscribers that have queues, webhooks, or event hubs as endpoints. As a subscriber, your logic app can wait for those events from the event grid before running automated workflows to perform tasks - without you writing any code.

References:

<https://docs.microsoft.com/en-us/azure/event-grid/monitor-virtual-machine-changes-event-grid-logic-app>

NEW QUESTION 56

- (Topic 5)

You have an Azure subscription named Subscription1 that contains the resources shown in the following table.

Name	Type	Region	Resource group
RG1	Resource group	West Europe	<i>Not applicable</i>
RG2	Resource group	North Europe	<i>Not applicable</i>
Vault1	Recovery Services vault	West Europe	RG1

You create virtual machines in Subscription1 as shown in the following table.

Name	Resource group	Region	Operating system
VM1	RG1	West Europe	Windows Server 2016
VM2	RG1	North Europe	Windows Server 2016
VM3	RG2	West Europe	Windows Server 2016
VMA	RG1	West Europe	Ubuntu Server 18.04
VMB	RG1	North Europe	Ubuntu Server 18.04
VMC	RG2	West Europe	Ubuntu Server 18.04

You plan to use Vault1 for the backup of as many virtual machines as possible. Which virtual machines can be backed up to Vault1?

- A. VM1, VM3, VMA, and VMC only
- B. VM1 and VM3 only
- C. VM1, VM2, VM3, VMA, VMB, and VMC
- D. VM1 only
- E. VM3 and VMC only

Answer: A

Explanation:

To create a vault to protect virtual machines, the vault must be in the same region as the virtual machines. If you have virtual machines in several regions, create a Recovery Services vault in each region.

References:

<https://docs.microsoft.com/bs-cyrl-ba/azure/backup/backup-create-rs-vault>

NEW QUESTION 61

HOTSPOT - (Topic 5)

You plan to deploy five virtual machines to a virtual network subnet.

Each virtual machine will have a public IP address and a private IP address. Each virtual machine requires the same inbound and outbound security rules.

What is the minimum number of network interfaces and network security groups that you require? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Minimum number of network interfaces:

▼

5

10

15

20

Minimum number of network security groups:

▼

1

2

5

10

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: 5

A public and a private IP address can be assigned to a single network interface. Box 2: 1

You can associate zero, or one, network security group to each virtual network subnet and network interface in a virtual machine. The same network security group can be associated to as many subnets and network interfaces as you choose.

NEW QUESTION 63

- (Topic 5)

You have an Azure subscription named Subscription1 that contains a virtual network named VNet1. VNet1 is in a resource group named RG1.

Subscription1 has a user named User1. User1 has the following roles;

- Reader
- Security Admin
- Security Reader

You need to ensure that User1 can assign the Reader role for VNet1 to other users. What should you do?

- A. Assign User1 the Contributor role for VNet1.
- B. Remove User from the Security Reader and Reader roles tot Subscription1.
- C. Assign User1 the Network Contributor role for VNet1.
- D. Assign User1 the User Access Administrator role for VNet1

Answer: D

Explanation:

https://docs.microsoft.com/en-us/azure/role-based-access-control/rbac-and-directory-admin-roles#:~:text=The%20User%20Access%20Administrator%20role%20enables%20the%20user%20to%20grant,Azure%20subscriptions%20and%20management%20groups.

NEW QUESTION 65

HOTSPOT - (Topic 5)

You have an Azure subscription that contains two storage accounts named contoso101 and contoso102.

The subscription contains the virtual machines shown in the following table.

VNet1 has service endpoints configured as shown in the Service endpoints exhibit. (Click the Service endpoints tab.)

VNet1 Service endpoints				
Virtual network				
+ Add Refresh				
Filter service endpoints				
Service	Subnet	Status	Locations	
Microsoft.AzureActiveDirectory	1		***	
	Subnet2	Succeeded	*	***
Microsoft.Storage	1		***	
	Subnet1	Succeeded	*	***

The Microsoft. Storage service endpoint has the service endpoint policy shown in the Microsoft. Storage exhibit. (Click the Microsoft. Storage tab.)

Create a service endpoint policy

Validation passed

Basics

Policy definitions

Tags

Review + create

Basics

Subscription

Resource group

Region

Name

Resources

Tags

Azure Pass - Sponsorship

RG1

East US

Policy1

contoso101 (Storage account)

None

For this policy to take effect, you will need to associate it to one or more subnets that have virtual network service endpoints. Please visit a virtual network in East US region and then select the subnets to which you would like to associate this policy.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area		
Statements	Yes	No
VM1 can access contoso102.	<input type="radio"/>	<input type="radio"/>
VM2 can access contoso101.	<input type="radio"/>	<input type="radio"/>
VM2 uses a private IP address to access Azure AD.	<input type="radio"/>	<input type="radio"/>

Answer:

Answer Area

Statements

VM1 can access contoso102.

Yes

☐

No

☒

VM2 can access contoso101.

☐☒

VM2 uses a private IP address to access Azure AD.

☐☒

- A. Mastered
B. Not Mastered

Answer: A

NEW QUESTION 67

- (Topic 5)

Your on-premises network contains an SMB share named Share1. You have an Azure subscription that contains the following resources: A web app named webapp1

A virtual network named VNET1

You need to ensure that webapp1 can connect to Share1. What should you deploy?

- A. an Azure Application Gateway
B. an Azure Active Directory (Azure AD) Application Proxy
C. an Azure Virtual Network Gateway

Answer: C

Explanation:

A Site-to-Site VPN gateway connection can be used to connect your on- premises network to an Azure virtual network over an IPsec/IKE (IKEv1 or IKEv2) VPN tunnel. This type of connection requires a VPN device, a VPN gateway, located on- premises that has an externally facing public IP address assigned to it.

A: Application Gateway is for http, https and Websocket - Not SMB

B: Application Proxy is also for accessing web applications on-prem - Not SMB. Application Proxy is a feature of Azure AD that enables users to access on- premises web applications from a remote client.

Reference:

<https://docs.microsoft.com/en-us/azure/vpn-gateway/vpn-gateway-howto-site-to-site-resource-manager-portal>

NEW QUESTION 70

- (Topic 5)

You have an Azure AD tenant that contains the groups shown in the following table.

Name	Type	Security
Group1	Security	Enabled
Group2	Mail-enabled security	Enabled
Group3	Microsoft 365	Enabled
Group4	Microsoft 365	Disabled

You purchase Azure Active Directory Premium P2 licenses. To which groups can you assign a license?

- A. Group 1 only
B. Group1 and Group3 only
C. Group3 and Group4 only
D. Group1, Group2, and Group3 only
E. Group1, Group2, Group3, and Group4

Answer: B

Explanation:

To assign a license to a group, the group must be a security group, not an Office 365 group or a mail-enabled security group1. According to the image, Group1 and Group3 are security groups, while Group2 and Group4 are Office 365 groups. Therefore, only Group1 and Group3 can be assigned a license.

To assign a license to a group, you need to follow these steps2:

? Sign in to the Azure portal with a license administrator account.

? Go to Azure Active Directory > Licenses and select the product license that you want to assign to groups.

? Select Assign at the top of the page and then select Users and groups.

? Search for and select the group that you want to assign the license to and then select OK.


? Select Assignment options to enable or disable specific services within the product license and then select OK.

? Select Assign at the bottom of the page to complete the assignment.


NEW QUESTION 75

HOTSPOT - (Topic 5)

You have the App Service plan shown in the following exhibit.

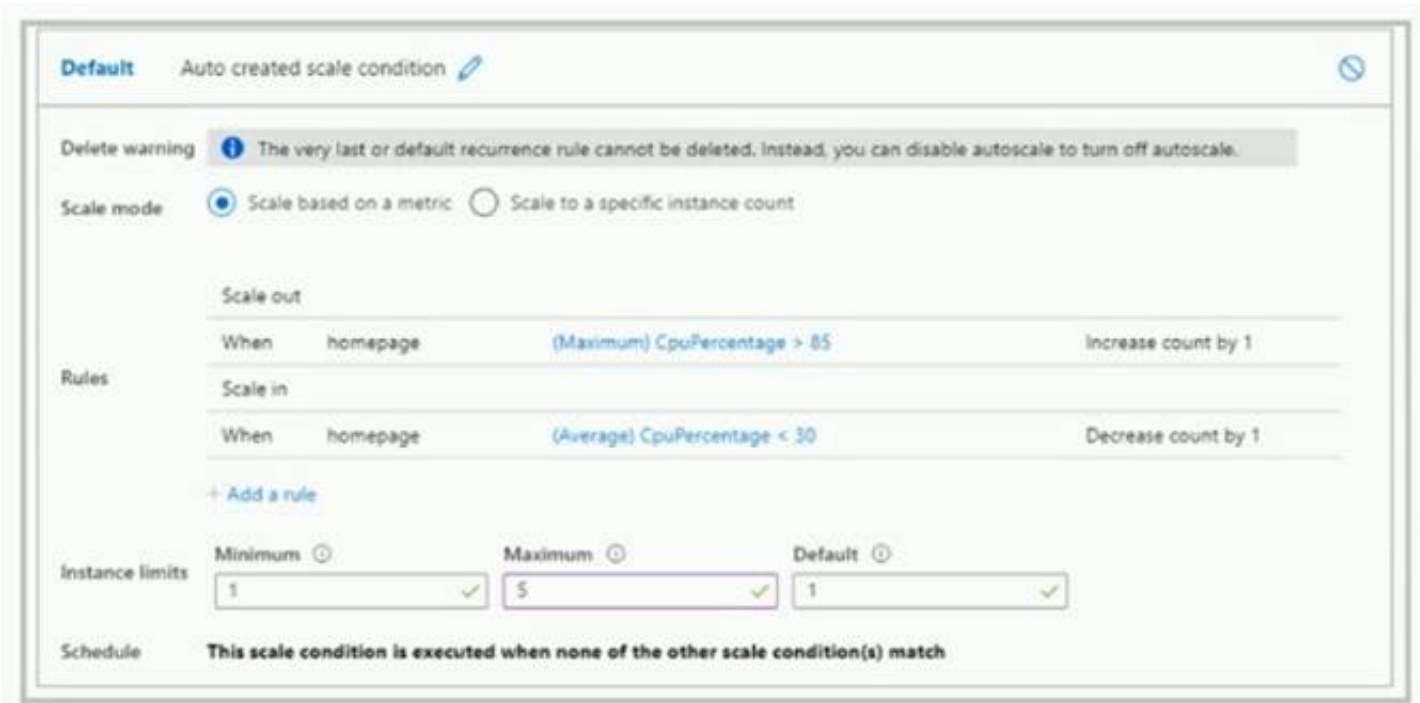

The scale-in settings for the App Service plan are configured as shown in the following exhibit.

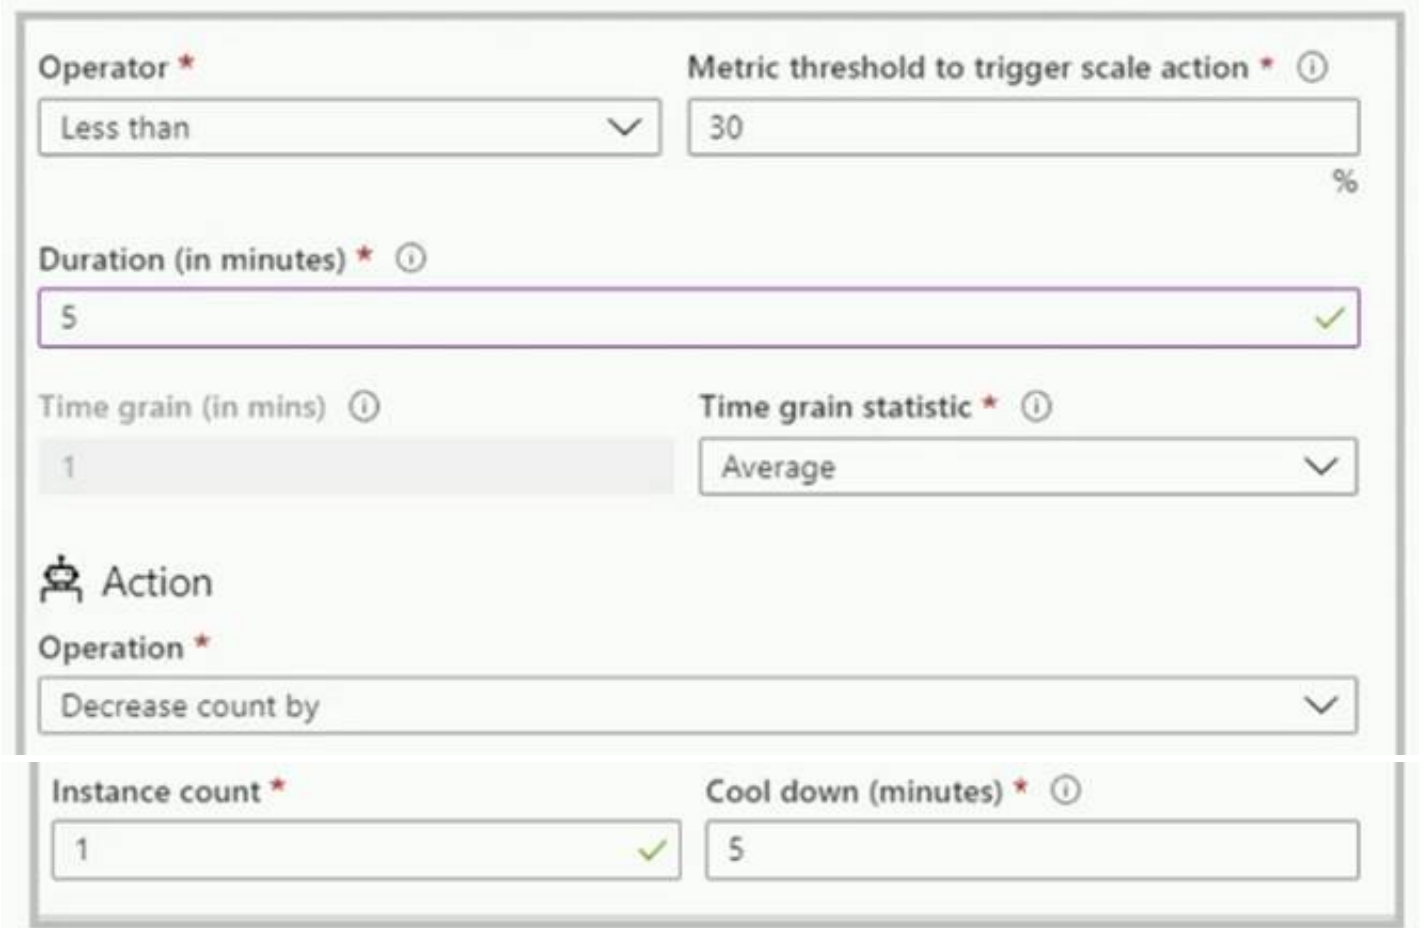

The scale out rule is configured with the same duration and cool down tile as the scale in rule.

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.

If CPU usage is 70 percent for one hour and then reaches 90 percent for five minutes, the total number of instances will be [answer choice].

1
2
3
4
5

If the CPU maintains a usage of 90 percent for one hour, and then the average CPU usage is below 25 percent for nine minutes, the number of instances will be [answer choice].

1
2
3
4
5

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

If CPU usage is 70 percent for one hour and then reaches 90 percent for five minutes, the total number of instances will be [answer choice].

1

2

3

4

5

If the CPU maintains a usage of 90 percent for one hour, and then the average CPU usage is below 25 percent for nine minutes, the number of instances will be [answer choice].

1

2

3

4

5

NEW QUESTION 77
HOTSPOT - (Topic 5)

You are configuring an availability set in the Azure portal. The configuration is shown in the following exhibit.

```
PS Azure:\> az vm availability-set list --resource-group RG1
[
  {
    "id": "/subscriptions/8372f433-2dcd-4361-b5ef-5b188fed87d0/resourceGroups/RG1/providers/Microsoft.Compute/availabilitySets/WEBPROD-AS-USE2",
    "location": "eastus2",
    "name": "WEBPROD-AS-USE2",
    "platformFaultDomainCount": 2,
    "platformUpdateDomainCount": 10,
    "proximityPlacementGroup": null,
    "resourceGroup": "RG1",
    "sku": {
      "capacity": null,
      "name": "Aligned",
      "tier": null
    },
    "statuses": null,
    "tags": {},
    "type": "Microsoft.Compute/availabilitySets",
    "virtualMachines": []
  }
]
```

You add 14 virtual machines to WEBPROD-AS-USE2.
Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.

When Microsoft performs planned maintenance in East US 2, the maximum number of unavailable virtual machines will be [answer choice].

2

7

10

14

If the server rack in the Azure datacenter that hosts WEBPROD-AS-USE2 experiences a power failure, the maximum number of unavailable virtual machines will be [answer choice].

2

7

10

14

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: 2
There are 10 update domains. The 14 VMs are shared across the 10 update domains so four update domains will have two VMs and six update domains will have one VM. Only one update domain is rebooted at a time.
Therefore, a maximum of two VMs will be offline. Box 2: 7

There are 2 fault domains. The 14 VMs are shared across the 2 fault domains, so 7 VMs in each fault domain.
A rack failure will affect one fault domain so 7 VMs will be offline.

NEW QUESTION 79
HOTSPOT - (Topic 5)

```
{
  "id": "b988327b-7dae-4d00-8925-1cc14fd68be4",
  "properties": {
    "roleName": "Role1",
    "description": "",
    "assignableScopes": [
      "/subscriptions/c69lad84-99f2-42fd-949b-58afd7ef6ab3"
    ],
    "permissions": [
      {
        "actions": [
          "Microsoft.Resources/subscription/resourceGroups/resources/read",
          "Microsoft.Resources/subscription/resourceGroups/read",
          "Microsoft.Resourcehealth/*",
          "Microsoft.Authorization/*/read",
          "Microsoft.Compute/*/read",
          "Microsoft.Support/*",
          "Microsoft.Authorization/*/read",
          "Microsoft.Network/virtualNetworks/read",
          "Microsoft.Resources/deployments/*",
          "Microsoft.Resources/subscription/resourceGroups/read",
          "Microsoft.Storage/storageAccounts/read",
          "Microsoft.Compute/virtualMachines/start/action",
          "Microsoft.Compute/virtualMachines/powerOff/action",
          "Microsoft.Compute/virtualMachines/deallocate/action",
          "Microsoft.Compute/virtualMachines/restart/action",
          "Microsoft.Compute/virtualMachines/*",
          "Microsoft.Compute/disks/*",
          "Microsoft.Compute/availabilitySets/*",
          "Microsoft.Network/virtualNetworks/subnets/join/action",
          "Microsoft.Network/virtualNetworks/subnets/read",
          "Microsoft.Network/virtualNetworks/subnets/virtualMachines/read",
          "Microsoft.Network/networkInterfaces/*",
          "Microsoft.Compute/snapshots/*"
        ],
        "notAction": [
          "Microsoft.Authorization/*/Delete",
          "Microsoft.Authorization/*/Write",
          "Microsoft.Authorization/elevateAccess/action"
        ]
      }
    ]
  }
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Answer Area		
Statements	Yes	No
Users that are assigned Role1 can assign Role1 to users.	<input type="radio"/>	<input type="radio"/>
Users that are assigned Role1 can deploy new virtual machines.	<input type="radio"/>	<input type="radio"/>
Users that are assigned Role1 can set a static IP address on a virtual machine.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:
Box 1: N
Because doesn't have:
Microsoft.Authorization/*/Write - Create roles, role assignments, policy assignments, policy definitions and policy set definitions
Box 2; Yes
Has been assigned;
Microsoft.Compute/virtualMachines/* - Perform all virtual machine actions including create, update, delete, start, restart, and power off virtual machines. Execute scripts on virtual machines.
Box 3: Y
Has been assigned;
Microsoft.Network/networkInterfaces/* - Create and manage network interfaces
See;
<https://learn.microsoft.com/en-us/azure/role-based-access-control/built-in-roles>

NEW QUESTION 83
HOTSPOT - (Topic 5)

You have an Azure subscription that contains the resources shown in the following table.

Name	Type
VM1	Virtual machine
storage1	Storage account
Workspace1	Log Analytics workspace
DB1	Azure SQL database

You plan to create a data collection rule named DCRI in Azure Monitor.

Which resources can you set as data sources in DCRI, and which resources can you set as destinations in DCRI? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Data sources:

VM1 only

VM1 and storage1 only

VM1, storage1, and DB1 only

VM1, storage1, Workspace1, and DB1

Destinations:

storage1 only

Workspace1 only

Workspace1 and storage1 only

Workspace1, storage1, and DB1 only1

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Data Sources: VM1 only Destination: Workspace1 Only

NEW QUESTION 88

- (Topic 5)

You have an Azure Active Directory (Azure AD) tenant named contoso.com.

You have a CSV file that contains the names and email addresses of 500 external users. You need to create a guest user account in contoso.com for each of the 500 external users.

Solution: You create a Power Shell script that runs the New-MgUser cmdlet for each user.

Does this meet the goal?

- A. Yes
- B. NO

Answer: B

Explanation:

The New-MgUser cmdlet is part of the Microsoft Graph PowerShell SDK, which is a module that allows you to interact with the Microsoft Graph API. The Microsoft Graph API is a service that provides access to data and insights across Microsoft 365, such as users, groups, mail, calendar, contacts, files, and more1.

The New-MgUser cmdlet can be used to create new users in your Azure AD tenant, but it has some limitations and requirements. For example, you need to have the Global Administrator or User Administrator role in your tenant, you need to authenticate with the Microsoft Graph API using a certificate or a client secret, and you need to specify the required parameters for the new user, such as userPrincipalName, accountEnabled, displayName, mailNickname, and passwordProfile2.

However, the New-MgUser cmdlet does not support creating guest user accounts in your Azure AD tenant. Guest user accounts are accounts that belong to external users from other organizations or domains. Guest user accounts have limited access and permissions in your tenant, and they are typically used for collaboration or sharing purposes3.

To create guest user accounts in your Azure AD tenant, you need to use a different cmdlet: New-AzureADMSInvitation. This cmdlet is part of the Azure AD PowerShell module, which is a module that allows you to manage your Azure AD resources and objects. The New- AzureADMSInvitation cmdlet can be used to create and send an invitation email to an external user, which contains a link to join your Azure AD tenant as a guest user. You can also specify some optional parameters for the invitation, such as the invited user display name, message info, redirect URL, or send invitation message.

Therefore, to meet the goal of creating guest user accounts for 500 external users from a CSV file, you need to use a PowerShell script that runs the New-AzureADMSInvitation cmdlet for each user, not the New-MgUser cmdlet.

NEW QUESTION 91

HOTSPOT - (Topic 5)

You have an Azure subscription that contains the resources shown in the following table:

Name	Type	Resource group	Tag
RG6	Resource group	Not applicable	None
VNET1	Virtual network	RG6	Department: D1

You assign a policy to RG6 as shown in the following table:

Section	Setting	Value
Scope	Scope	Subscription1/RG6
	Exclusions	None
Basics	Policy definition	Apply tag and its default value
	Assignment name	Apply tag and its default value
Parameters	Tag name	Label
	Tag value	Value1

To RG6, you apply the tag: RGroup: RG6.
You deploy a virtual network named VNET2 to RG6.
Which tags apply to VNET1 and VNET2? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

VNET1:

▼

None

Department: D1 only

Department: D1, and RGroup: RG6 only

Department: D1, and Label: Value1 only

Department: D1, RGroup: RG6, and Label: Value1

VNET2:

▼

None

RGroup: RG6 only

Label: Value1 only

RGroup: RG6, and Label: Value1

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:
<https://learn.microsoft.com/en-us/azure/azure-resource-manager/management/tag-policies>

NEW QUESTION 92

- (Topic 5)
You have an Azure subscription that contains a storage account named storage. You have the devices shown in the following table.

Name	Platform
Device1	Windows 10
Device2	Linux
Device3	macOS

From which devices can you use AzCopy to copy data to storage1?

- A. Device1 and Device2 only
- B. Device1, Device2 and Device3
- C. Device' only
- D. Device and Device3 only

Answer: B

Explanation:
<https://learn.microsoft.com/en-us/azure/storage/common/storage-use-azcopy- v10#download-azcopy>

NEW QUESTION 94

- (Topic 5)
You have an Azure subscription that contains a virtual machine named VM1.
You plan to deploy an Azure Monitor alert rule that will trigger an alert when CPU usage on VM1 exceeds 80 percent.

You need to ensure that the alert rule sends an email message to two users named User1 and User2. What should you create for Azure Monitor?

- A. an action group
- B. a mail-enabled security group
- C. a distribution group
- D. a Microsoft 365 group

Answer: A

Explanation:

An action group is a collection of notification preferences that can be used by Azure Monitor to send alerts to users or groups when an alert rule is triggered. An action group can include email recipients, SMS recipients, voice call recipients, webhook URLs, Azure functions, Logic Apps, and more. To send an email message to two users named User1 and User2 when CPU usage on VM1 exceeds 80 percent, you need to create an action group that contains their email addresses and associate it with the alert rule. References:
 ? Create and manage action groups in the Azure portal
 ? Create, view, and manage Metric alerts using Azure Monitor

NEW QUESTION 97

HOTSPOT - (Topic 5)

You have an Azure subscription that contains the public load balancers shown in the following table.

Name	SKU
LB1	Basic
LB2	Standard

You plan to create six virtual machines and to load balance requests to the virtual machines. Each load balancer will load balance three virtual machines. You need to create the virtual machines for the planned solution. How should you create the virtual machines? To answer, select the appropriate options in the answer area.
 NOTE: Each correct selection is worth one point.

The virtual machines that will be load balanced by using LB1 must:

- be created in the same availability set or virtual machine scale set.
- be connected to the same virtual network.
- be created in the same resource group.
- be created in the same availability set or virtual machine scale set.
- run the same operating system.

The virtual machines that will be load balanced by using LB2 must:

- be connected to the same virtual network.
- be connected to the same virtual network.
- be created in the same resource group.
- be created in the same availability set or virtual machine scale set.
- run the same operating system.

Answer:

The virtual machines that will be load balanced by using LB1 must:

- be created in the same availability set or virtual machine scale set.
- be connected to the same virtual network.
- be created in the same resource group.
- be created in the same availability set or virtual machine scale set.
- run the same operating system.

The virtual machines that will be load balanced by using LB2 must:

- be connected to the same virtual network.
- be connected to the same virtual network.
- be created in the same resource group.
- be created in the same availability set or virtual machine scale set.
- run the same operating system.

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

<https://docs.microsoft.com/en-us/azure/load-balancer/skus>>

NEW QUESTION 100

HOTSPOT - (Topic 5)

You have an Azure subscription that contains the resources shown in the following table

Name	Type
ManagementGroup1	Management group
RG1	Resource group
9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75	Subscription ID
Tag1	Tag

In Azure Cloud Shell, you need to create a virtual machine by using an Azure Resource Manager (ARM) template. How should you complete the command? To answer, select the appropriate options in the answer area,
 NOTE: Each correct selection is worth one point.

```
$adminPassword = Read-Host -Prompt "Enter the administrator password" -AsSecureString
```

New-AzVm
New-AzResource
New-AzTemplateSpec
New-AzResourceGroupDeployment

-Tag Tag1 '
-ResourceGroupName RG1 '
-GroupName ManagementGroup1 '
-Subscription 9c8bc1cd-7655-4c66-b3ea-a8ee101d8f75

```
- TemplateUri "https://raw.githubusercontent.com/Azure/azure-quickstart-templates/master/101-vm-simple-windows/azuredeploy.json" `
- adminUsername LocalAdministrator -adminPassword $adminPassword -dnsLabelPrefix ContosoVM1
```

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

NEW QUESTION 103

HOTSPOT - (Topic 5)

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Description
VNET1	Virtual network	Contains subnet1 and subnet2
subnet1	Subnet	IP address space 10.3.0.0/24
subnet2	Subnet	IP address space 10.4.0.0/24
NSG1	Network security group (NSG)	None
vm1	Virtual machine	IP address 10.3.0.15
vm2	Virtual machine	IP address 10.4.0.16
storage1	Storage account	None

NSG1 is configured as shown in the following exhibit.

<div> <div>Essentials</div> <div> <div>Resource group (change) : RG1</div> <div>Location : East US 2</div> <div>Subscription (change) : Microsoft Azure Sponsorship</div> <div>Subscription ID :</div> <div>Tags (change) : Click here to add tags</div> </div> <div> <div>Custom security rules : 1 inbound, 2 outbound</div> <div>Associated with : 1 subnets, 0 network interfaces</div> </div> </div>						
<div> <div>Filter by name</div> <div>Port == all</div> <div>Protocol == all</div> <div>Source == all</div> <div>Destination == all</div> <div>Action == all</div> </div>						
Priority ↑↓	Name ↑↓	Port ↑↓	Protocol ↑↓	Source ↑↓	Destination ↑↓	Action ↑↓
<div>Inbound Security Rules</div>						
110	HTTPS_VM1_Deny	443	TCP	Internet	10.3.0.15	Deny
65000	AllowVnetInBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowAzureLoadBalan...	Any	Any	AzureLoadBalancer	Any	Allow
65500	DenyAllInBound	Any	Any	Any	Any	Deny
<div>Outbound Security Rules</div>						
145	Storage_Access	443	TCP	VirtualNetwork	Storage	Allow
150	Block_Internet	Any	Any	VirtualNetwork	Internet	Deny
65000	AllowVnetOutBound	Any	Any	VirtualNetwork	VirtualNetwork	Allow
65001	AllowInternetOutBound	Any	Any	Any	Internet	Allow
65500	DenyAllOutBound	Any	Any	Any	Any	Deny

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
VM1 can access storage1.	<input type="radio"/>	<input type="radio"/>
VM2 can access VM1 by using the HTTPS protocol.	<input type="radio"/>	<input type="radio"/>
The security rules for NSG1 apply to any virtual machine on VNET1.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

Yes - VM1 can access the Storage account because there is nothing blocking it the on the virtual network. There is a rule that actually allows outbound access to

storage.
Yes- VM2 is on the Same VNET there is nothing blocking access to it from VM1 on the Virtual network. The Deny rule for HTTPS_VM1_Deny is for inbound connections from the internet.
No- You have a inbound deny rule for VM1 from the the internet with a destination of the 10.3.0.15 which is in Subnet1. This proves the NSG is associated to Subnet1 and only subnet one because the image shows it is connected to only 1 subnet. VM2 is on Subnet2 which you can determined by its IP address. This means that NSG1 does not apply to VM2.


NEW QUESTION 107

HOTSPOT - (Topic 5)

You have an Azure subscription. The subscription contains virtual machines that run Windows Server 2016 and are configured as shown in the following table.

Name	Virtual network	DNS suffix configured in Windows Server
VM1	VNET2	Contoso.com
VM2	VNET2	None
VM3	VNET2	Adatum.com

You create a public Azure DNS zone named adatum.com and a private Azure DNS zone named conioso.com.
You create a virtual network link for contoso.com as shown in the following exhibit.

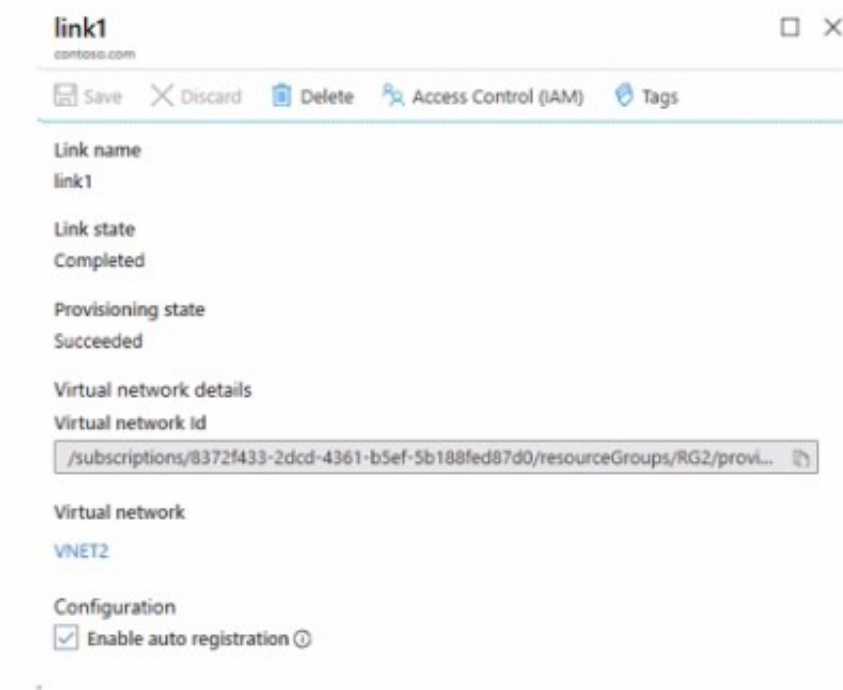

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Statements	Yes	No
When VM1 starts, a record for VM1 is added to the contoso.com DNS zone.	<input type="radio"/>	<input type="radio"/>
When VM2 starts, a record for VM2 is added to the contoso.com DNS zone.	<input type="radio"/>	<input type="radio"/>
When VM3 starts, a record for VM3 is added to the adatum.com DNS zone.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

All three VMs are in VNET2. Auto registration is enabled for private Azure DNS zone named contoso.com, which is linked to VNET2. So, VM1, VM2 and VM3 will auto-register their host records to contoso.com.
None of the VM will auto-register to the public Azure DNS zone named adatum.com. You cannot register private IPs on the internet (adatum.com)
Box 1: Yes
Auto registration is enabled for private Azure DNS zone named contoso.com.
Box 2: Yes
Auto registration is enabled for private Azure DNS zone named contoso.com.
Box 3: No
None of the VM will auto-register to the public Azure DNS zone named adatum.com

NEW QUESTION 112

HOTSPOT - (Topic 5)

You have an Azure Active Directory (Azure AD) tenant that contains three global administrators named Admin1, Admin2, and Admin3.
The tenant is associated to an Azure subscription. Access control for the subscription is configured as shown in the Access control exhibit. (Click the Exhibit tab.)

You sign in to the Azure portal as Admin1 and configure the tenant as shown in the Tenant exhibit. (Click the Exhibit tab.)

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

A. Mastered
B. Not Mastered

Explanation:

You can be GA in one of the subscription, it doesn't mean that you can create the resources in all subscription. As a Global Administrator in Azure Active Directory (Azure AD), you might not have access to all subscriptions and management groups in your directory. Azure AD and Azure resources are secured independently from one another. That is, Azure AD role assignments do not grant access to Azure resources, and Azure role assignments do not grant access to Azure AD. However, if you are a Global Administrator in Azure AD, you can assign yourself access to all Azure subscriptions and management groups in your directory.

- (Topic 5)

You have an Azure subscription that contains an Azure virtual machine named VM1. VM1 runs a financial reporting app named App1 that does not support multiple active instances. At the end of each month, CPU usage for VM1 peaks when App1 runs. You need to create a scheduled runbook to increase the processor performance of VM1 at the end of each month.

What task should you include in the runbook?

- A. Add the Azure Performance Diagnostics agent to VM1.
- B. Modify the VM size property of VM1.
- C. Add VM1 to a scale set.
- D. Increase the vCPU quota for the subscription.
- E. Add a Desired State Configuration (DSC) extension to VM1.

Answer: B


Explanation:

To create a scheduled runbook to increase the processor performance of VM1 at the end of each month, you need to modify the VM size property of VM1. This will allow you to scale up the VM to a larger size that has more CPU cores and memory. You can use Azure Automation to create a PowerShell runbook that changes the VM size using the Set-AzVM cmdlet. You can then schedule the runbook to run at the end of each month using the Azure portal or Azure PowerShell. For more information, see [How to resize a virtual machine in Azure using Azure Automation](#)1.

NEW QUESTION 117

- (Topic 5)

You create an Azure VM named VM1 that runs Windows Server 2019. VM1 is configured as shown in the exhibit (Click the Exhibit tab.)

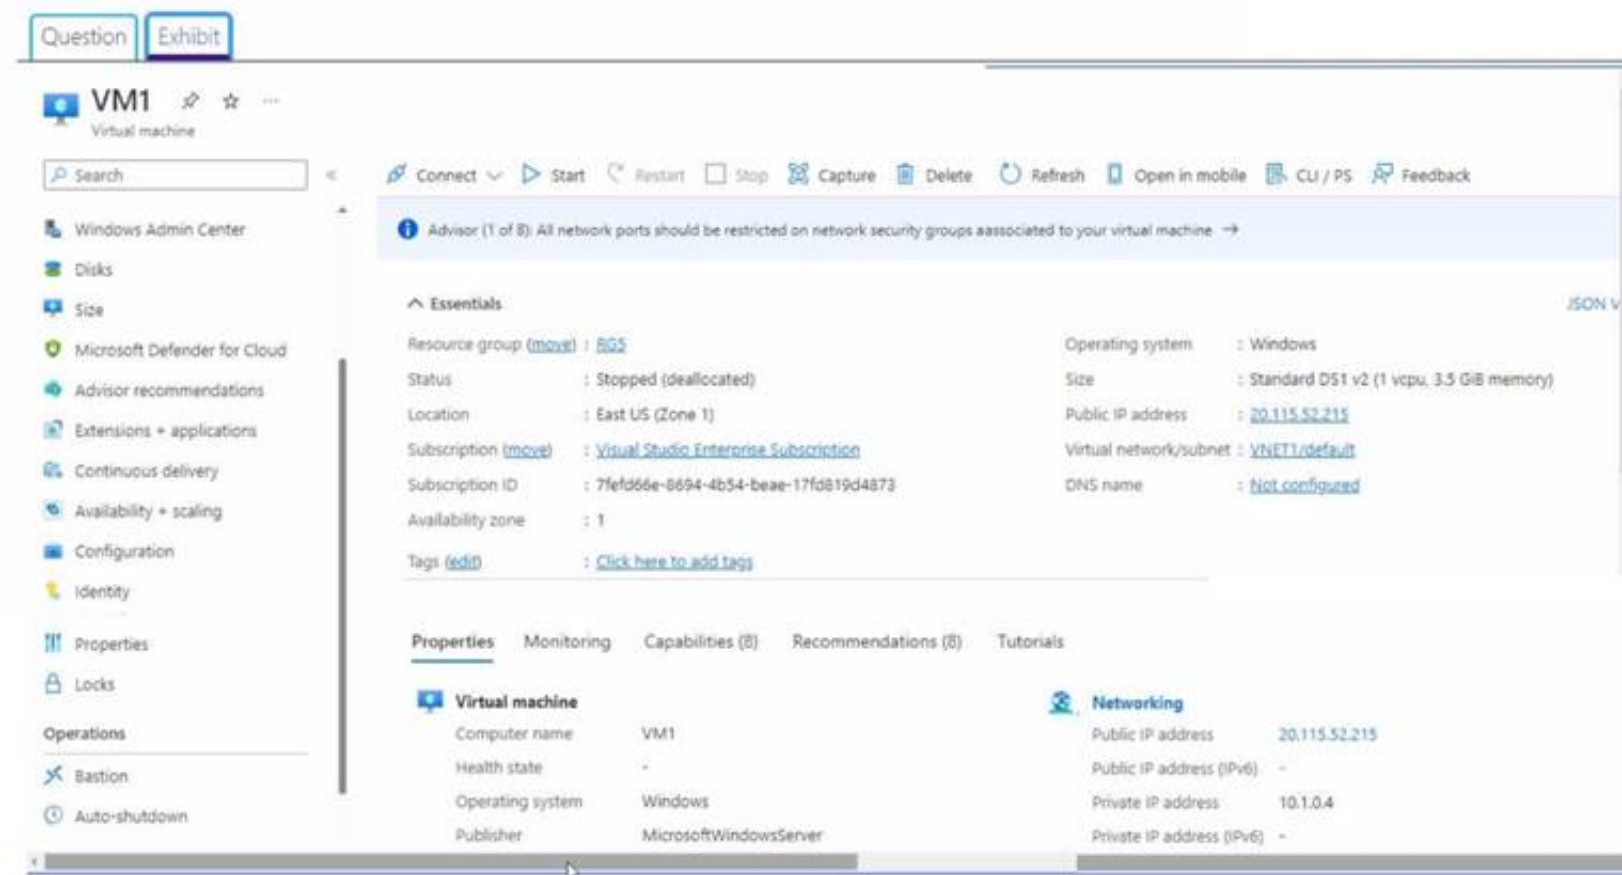

You need to enable Desired State Configuration for VM1. What should you do first?

- A. Mastered
- B. Not Mastered

Answer: A

NEW QUESTION 118

HOTSPOT - (Topic 5)

You have an Azure subscription that contains the virtual networks shown in the following table.

Name	Subnet	Subnet-associated network security group (NSG)	Peered with
VNet1	Subnet1	NSG1	VNet2
VNet2	Subnet2	NSG2	VNet1

The subscription contains the virtual machines shown in the following table.

Name	Connected to
VM1	Subnet1
VM2	Subnet2

The subscription contains the Azure App Service web apps shown in the following table.

Name	Description
WebApp1	Uses the Premium pricing tier and has virtual network integration with VNet1
WebApp2	Uses the Isolated pricing tier and is deployed to Subnet2

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
 NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
WebApp1 can communicate with VM2.	<input type="radio"/>	<input type="radio"/>
NSG1 controls inbound traffic to WebApp1.	<input type="radio"/>	<input type="radio"/>
WebApp2 can communicate with VM1.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
B. Not Mastered

Answer: A

Explanation:

? WebApp1 can communicate with VM2. No, this is not correct. According to the tables, WebApp1 is integrated with VNet1, which has a peering connection with VNet2. Therefore, WebApp1 cannot communicate with VM2

VNet2. However, VM2 is in VNet3, which is not peered with VNet1 or across different virtual networks1.

? NSG1 controls inbound traffic to WebApp1. No, this is not correct. According to the tables, NSG1 is associated with Subnet1 in VNet1, which is integrated with WebApp1. However, network security groups only control outbound traffic from App Service apps to virtual networks, not inbound traffic to App Service apps from virtual networks2. Therefore, NSG1 does not control inbound traffic to WebApp1.

? WebApp2 can communicate with VM1. Yes, this is correct. According to the tables, WebApp2 is integrated with VNet3, which has a peering connection with VNet2. VM1 is in Subnet2 in VNet2, which has a network security group named NSG2 that allows inbound traffic from any source on port 803. Therefore, WebApp2 can communicate with VM1 on port 80 across peered virtual networks.

NEW QUESTION 119

- (Topic 5)

You sign up for Azure Active Directory (Azure AD) Premium.

You need to add a user named admin1@contoso.com as an administrator on all the computers that will be joined to the Azure AD domain.

What should you configure in Azure AD?

- A. Device settings from the Devices blade.
B. General settings from the Groups blade.
C. User settings from the Users blade.
D. Providers from the MFA Server blade.

Answer: A

Explanation:

<https://docs.microsoft.com/en-us/azure/active-directory/devices/assign-local-admin>

NEW QUESTION 121

- (Topic 5)

You have an Azure subscription that contains 20 virtual machines, a network security group (NSG) named NSG1, and two virtual networks named VNET1 and VNET2 that are peered.

You plan to deploy an Azure Bastion Basic SKU host named Bastion1 to VNET1. You need to configure NSG1 to allow inbound access from the internet to Bastion1.

Which port should you configure for the inbound security rule?

- A. 22
B. 443
C. 3389
D. 8080

Answer: B

Explanation:

Azure Bastion is a service that provides secure and seamless RDP/SSH connectivity to virtual machines directly over TLS from the Azure portal or via native client. Azure Bastion uses an HTML5 based web client that is automatically streamed to your local device. Your RDP/SSH session is over TLS on port 443. This enables the traffic to traverse firewalls more securely. To allow inbound access from the internet to Bastion1, you need to configure NSG1 to allow port 443 for the inbound security rule. References:

? What is Azure Bastion?

? About Azure Bastion configuration settings

NEW QUESTION 122

- (Topic 5)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.

Another administrator plans to create several network security groups (NSGs) in the subscription.

You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.

Solution: You configure a custom policy definition, and then you assign the policy to the subscription.

Does this meet the goal?

- A. Yes
B. No

Answer: B

Explanation:

A custom policy definition is a way to define your own rules for using Azure resources. You can use custom policies to enforce compliance, security, cost management, or organization-specific requirements. However, a custom policy definition alone is not enough to meet the goal of automatically blocking TCP port 8080 between the virtual networks. You also need to create a policy assignment that applies the custom policy definition to the scope of the subscription. A policy assignment is the link between a policy definition and an Azure resource. Without a policy assignment, the custom policy definition will not take effect. Therefore, the solution does not meet the goal.

References:

- ? Tutorial: Create a custom policy definition
- ? Create and manage policies to enforce compliance

NEW QUESTION 123

- (Topic 5)

You have an Azure subscription that contains a virtual network named VNet1. VNet1 contains four subnets named Gateway, Perimeter, NVA and Production. The NVA subnet contains two network virtual appliances (NVAs) that will perform network traffic inspection between the Perimeter subnet and the Production subnet.

You need to implement an Azure load balancer for the NVAs. The solution must meet the following requirements:

- The NVAs must run in an active-active configuration that uses automatic failover.
- The load balancer must load balance traffic to two services on the Production subnet. The services have different IP addresses.

Which three actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. Add two load balancing rules that have HA Ports enabled and Floating IP disabled.
B. Deploy a basic load balancer.
C. Add a frontend IP configuration, a backend pool, and a health probe.
D. Add two load balancing rules that have HA Ports and Floating IP enabled.
E. Deploy a standard load balancer.
F. Add a frontend IP configuration, two backend pools, and a health probe.

Answer: DEF

NEW QUESTION 126

- (Topic 5)

You plan to automate the deployment of a virtual machine scale set that uses the Windows Server 2016 Datacenter image.

You need to ensure that when the scale set virtual machines are provisioned, they have web server components installed.

Which two actions should you perform? Each correct answer presents part of the solution. NOTE Each correct selection is worth one point.

- A. Modify the extensionProfile section of the Azure Resource Manager template.
B. Create a new virtual machine scale set in the Azure portal.
C. Create an Azure policy.
D. Create an automation account.
E. Upload a configuration script.

Answer: AB

Explanation:

To automate the deployment of a virtual machine scale set that uses the Windows Server 2016 Datacenter image and has web server components installed, you need to perform the following actions:

? Modify the extensionProfile section of the Azure Resource Manager template. This section defines the extensions that are applied to the scale set virtual machines after they are provisioned. You can use the Custom Script Extension to run PowerShell scripts that install and configure the web server components. For more information, see Deploy an application to an Azure Virtual Machine Scale Set1.

? Upload a configuration script. This is the PowerShell script that contains the commands to install and configure the web server components. You can upload the script to a storage account or a GitHub repository, and then reference it in the extensionProfile section of the template. For an example of a configuration script, see Tutorial: Install applications in Virtual Machine Scale Sets with Azure PowerShell2.

NEW QUESTION 131

- (Topic 5)

You have an app named App1 that runs on an Azure web app named webapp1.

The developers at your company upload an update of App1 to a Git repository named GUI. Webapp1 has the deployment slots shown in the following table.

Name	Function
webapp1-prod	Production
webapp1-test	Staging

You need to ensure that the App1 update is tested before the update is made available to users.

Which two actions should you perform? Each correct answer presents part of the solution. NOTE: Each correct selection is worth one point.

- A. Swap the slots
B. Deploy the App1 update to webapp1-prod, and then test the update
C. Stop webapp1-prod
D. Deploy the App1 update to webapp1-test, and then test the update
E. Stop webapp1-test

Answer: AD

Explanation:

<https://docs.microsoft.com/en-us/azure/app-service/deploy-staging-slots>

NEW QUESTION 135

HOTSPOT - (Topic 5)

You have an Azure subscription that contains a storage account named storage1. The subscription is linked to an Azure Active Directory (Azure AD) tenant named contoso.com that syncs to an on-premises Active Directory domain.

The domain contains the security principals shown in the following table.

Name	Type
User1	User
Computer1	Computer

In Azure AD, you create a user named User2.

The storage1 account contains a file share named share1 and has the following configurations.

```
"kind": "StorageV2",
"properties": {
  "azureFilesIdentityBasedAuthentication": {
    "directoryServiceOptions": "AD",
    "activeDirectoryProperties": {
      "domainName": "Contoso.com",
      "netBiosDomainName": "Contoso.com",
      "forestName": "Contoso.com",
    }
  }
}
```

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Statements	Yes	No
You can assign the Storage File Data SMB Share Contributor role to User1 for share1.	<input type="radio"/>	<input type="radio"/>
You can assign the Storage File Data SMB Share Reader role to Computer1 for share1.	<input type="radio"/>	<input type="radio"/>
You can assign the Storage File Data SMB Share Elevated Contributor role to User2 for share1.	<input type="radio"/>	<input type="radio"/>

A. Mastered

B. Not Mastered

Answer: A

Explanation:

Statements	Yes	No
You can assign the Storage File Data SMB Share Contributor role to User1 for share1.	<input checked="" type="radio"/>	<input type="radio"/>
You can assign the Storage File Data SMB Share Reader role to Computer1 for share1.	<input type="radio"/>	<input checked="" type="radio"/>
You can assign the Storage File Data SMB Share Elevated Contributor role to User2 for share1.	<input checked="" type="radio"/>	<input type="radio"/>

NEW QUESTION 138

- (Topic 5)

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an Azure subscription that contains 10 virtual networks. The virtual networks are hosted in separate resource groups.

Another administrator plans to create several network security groups (NSGs) in the subscription.

You need to ensure that when an NSG is created, it automatically blocks TCP port 8080 between the virtual networks.

Solution: From the Resource providers blade, you unregister the Microsoft.ClassicNetwork provider.

Does this meet the goal?

A. Yes

B. No

Answer: B

Explanation:

No, this does not meet the goal. Unregistering the Microsoft.ClassicNetwork provider does not affect the creation of network security groups (NSGs) in the subscription. The Microsoft.ClassicNetwork provider is used for managing classic deployment model resources, such as virtual networks, network interfaces, and public IP addresses1. However, NSGs are only supported for Resource Manager deployment model resources2. Therefore, unregistering the

Microsoft.ClassicNetwork provider will not automatically block TCP port 8080 between the virtual networks.
To meet the goal, you need to create a custom policy definition that enforces a default security rule for NSGs. A policy definition is a set of rules and actions that Azure performs when evaluating your resources³. You can use a policy definition to specify the required properties and values for NSGs, such as the direction, protocol, source, destination, and port of the security rule. You can then assign the policy definition to the subscription scope, so that it applies to all the resource groups and virtual networks in the subscription.

NEW QUESTION 143

HOTSPOT - (Topic 5)

You have an Azure subscription.

You plan to use an Azure Resource Manager template to deploy a virtual network named VNET1 that will use Azure Bastion.

How should you complete the template? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

```
{
  "type": "Microsoft.Network/virtualNetworks",
  "name": "VNET1"
  "apiVersion": "2019-02-01",
  "location": "[resourceGroup().location]",
  "properties": {
    "addressSpace": {
      "addressPrefixes": ["10.10.10.0/24"]
    },
    "subnets": [
      {
        "name": 
        "properties": {
          "addressPrefix": 
        }
      },
      {
        "name": "LAN02",
        "properties": {
          "addressPrefix": "10.10.10.128/25"
        }
      }
    ]
  }
}
```

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Answer Area

```
{
  "type": "Microsoft.Network/virtualNetworks",
  "name": "VNET1"
  "apiVersion": "2019-02-01",
  "location": "[resourceGroup().location]",
  "properties": {
    "addressSpace": {
      "addressPrefixes": ["10.10.10.0/24"]
    },
    "subnets": [
      {
        "name":
          AzureBastionSubnet
          AzureFirewallSubnet
          LAN01
          RemoteAccessSubnet

        "properties": {
          "addressPrefix":
            10.10.10.0/27
            10.10.10.0/29
            10.10.10.0/30

        }
      },
      {
        "name": "LAN02",
        "properties": {
          "addressPrefix": "10.10.10.128/25"
        }
      }
    ]
  }
}
```

NEW QUESTION 148
HOTSPOT - (Topic 5)
You have an Azure Kubernetes Service (AKS) cluster named AKS1 and a computer named Computer1 that runs Windows 10. Computer1 that has the Azure CLI installed.
You need to install the kubectl client on Computer1.
Which command should you run? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

az
docker
msiexec.exe
Install-Module

aks
/package
-name
pull

Install-cli

- A. Mastered
- B. Not Mastered

Answer: A
Explanation:
To install kubectl locally, use the az aks install-cli command: az aks install-cli

NEW QUESTION 150
- (Topic 5)

You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users. You need to create a guest user account in contoso.com for each of the 500 external users.
Solution: from Azure AD in the Azure portal, you use the Bulk create user operation. Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:
<https://learn.microsoft.com/en-us/azure/active-directory/external-identities/tutorial-bulk-invite?source=recommendations>
information and invitation preferences
- Use "Bulk invite users" to prepare a comma-separated value (.csv) file with the user information and invitation preferences
- Upload the .CSV file to Azure AD
- Verify the users were added to the directory

NEW QUESTION 154

- (Topic 5)
You have a Recovery Services vault named RSV1. RSV1 has a backup policy that retains instant snapshots for five days and daily backup for 14 days. RSV1 performs daily backups of VM1. VM1 hosts a static website that was updated eight days ago. You need to recover VM1 to a point eight days ago. The solution must minimize downtime. What should you do first?

- A. Deallocate VM1.
- B. Restore VM1 by using the Replace existing restore configuration option.
- C. Delete VM1.
- D. Restore VM1 by using the Create new restore configuration option.

Answer: D

Explanation:
<https://learn.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms#restore-options>
To recover VM1 to a point eight days ago, you need to use the Azure Backup service to restore the VM from a recovery point. A recovery point is a snapshot of the VM data at a specific point in time. Azure Backup creates recovery points according to the backup policy that you configure for the Recovery Services vault1. In this case, the Recovery Services vault named RSV1 has a backup policy that retains instant snapshots for five days and daily backup for 14 days. This means that you can restore the VM from any point in the last 14 days, as long as there is a recovery point available. Since you need to recover VM1 to a point eight days ago, you can use the daily backup recovery point that was created on that day2. To restore the VM from a recovery point, you have two options: Replace existing or Create new. The Replace existing option overwrites the existing VM with the restored data, while the Create new option creates a new VM with the restored data. The Replace existing option requires you to deallocate or delete the existing VM before restoring it, which can cause downtime and data loss. The Create new option allows you to restore the VM without affecting the existing VM, which minimizes downtime and data loss3. Therefore, the best option is to restore VM1 by using the Create new restore configuration option. This will create a new VM with the same name as VM1 and append a suffix to it, such as -Restored. You can then verify that the new VM has the correct data and configuration, and switch over to it when you are ready. You can also delete the original VM if you don't need it anymore3.

NEW QUESTION 156

- (Topic 5)
You have an Azure subscription that contains the virtual machines shown in the following table.
javascript:void(0)

Name	Public IP SKU	Connected to	Status
VM1	None	VNET1/Subnet1	Stopped (deallocated)
VM2	Basic	VNET1/Subnet2	Running

You deploy a load balancer that has the following configurations:
• Name: LB1
• Type internal
• SKU: Standard
• Virtual network VNET1
You need to ensure that you can add VM1 and VM2 to the backend pool of LB1.
Solution: You create a Basic SKU public IP address, associate the address to the network interface of VM1, and then start VM1.
Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:
You can only attach virtual machines that are in the same location and on the same virtual network as the LB. Virtual machines must have a standard SKU public IP or no public IP. The LB needs to be a standard SKU to accept individual VMs outside an availability set or vmss. VMs do not need to have public IPs but if they do have them they have to be standard SKU. Vms can only be from a single network. When they don't have a public IP they are assigned an ephemeral IP. Also, when adding them to a backend pool, it doesn't matter in which status are the VMs. Note: Load balancer and the public IP address SKU must match when you use them with public IP addresses.


NEW QUESTION 160

- (Topic 5)
Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an app named App1 that is installed on two Azure virtual machines named VM1 and VM2. Connections to App1 are managed by using an Azure Load Balancer.

The effective network security configurations for VM2 are shown in the following exhibit.

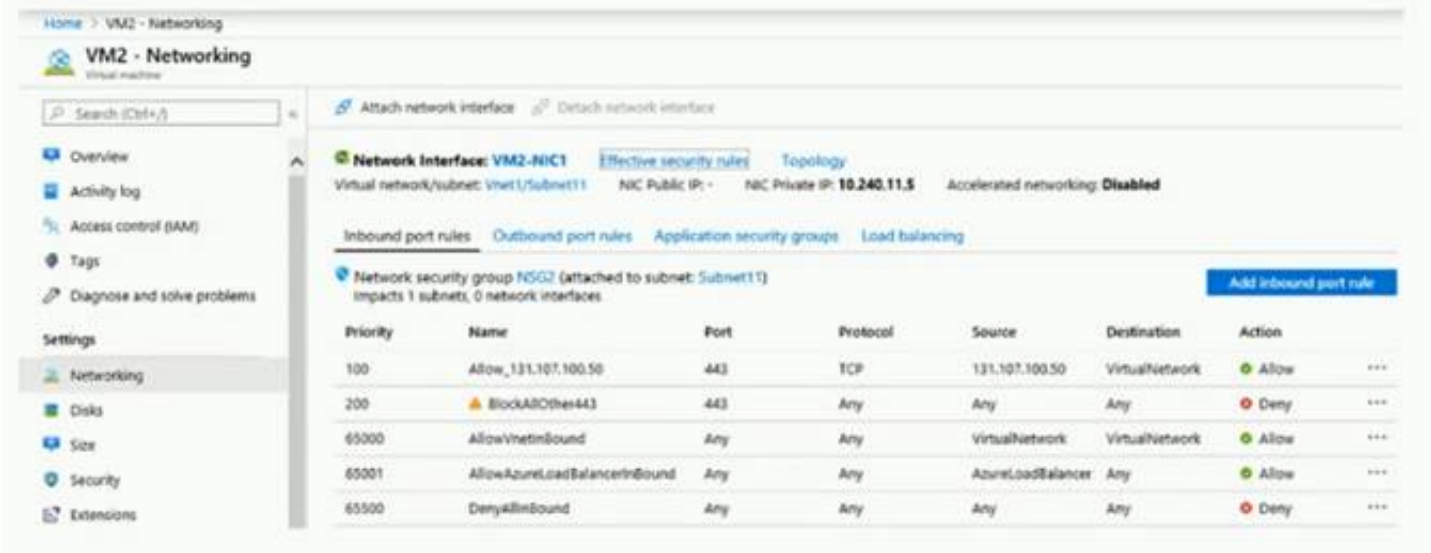

You discover that connections to App1 from 131.107.100.50 over TCP port 443 fail. You verify that the Load Balancer rules are configured correctly. You need to ensure that connections to App1 can be established successfully from 131.107.100.50 over TCP port 443.

Solution: You create an inbound security rule that denies all traffic from the 131.107.100.50 source and has a cost of 64999.

Does this meet the goal?

- A. Yes
- B. No

Answer: B

NEW QUESTION 165

HOTSPOT - (Topic 5)

You have an Azure Storage account named storage1 that contains a blob container. The blob container has a default access tier of Hot. Storage1 contains a container named container1.

You create lifecycle management rules in storage1 as shown in the following table.

Name	Rule scope	Blob type	Blob subtype	Rule block	Prefix match
Rule1	Limit blobs by using filters.	Block blobs	Base blobs	If base blobs were not modified for two days, move to archive storage. If base blobs were not modified for nine days, delete the blob.	container1/Dep1
Rule2	Apply to all blobs in storage1.	Block blobs	Base blobs	If base blobs were not modified for three days, move to cool storage. If base blobs were not modified for nine days, move to archive storage.	Not applicable

You perform the actions shown in the following table.

Date	Action
October 1	Upload three files named Dep1File1.docx, File2.docx, and File3.docx to container1.
October 2	Edit Dep1File1.docx and File3.docx.
October 5	Edit File2.docx.

For each of the following statements, select Yes if the statement is true. Otherwise, select No. NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
On October 10, you can read Dep1File1.docx without a delay.	<input type="radio"/>	<input type="radio"/>
On October 10, you can read File2.docx without a delay.	<input type="radio"/>	<input type="radio"/>
On October 10, you can read File3.docx without a delay.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

File3.docx is a blob in container1 that was uploaded on October 1 and edited on October 2. According to the lifecycle management rule 2, any blob in container1 that has not been modified for 5 days will be deleted. Therefore, on October 7, File3.docx will be deleted from the storage account. Therefore, on October 10, you cannot read File3.docx because it no longer exists.

NEW QUESTION 168

- (Topic 5)

You have two Azure subscriptions named Sub1 and Sub2.

Sub1 contains a virtual machine named VM1 and a storage account named storage1.

VM1 is associated to the resources shown in the following table. You need to move VM1 to Sub2.

Which resources should you move to Sub2?

- A. VM1, Disk1, and NetInt1 only
- B. VM1, Disk1, and VNet1 only
- C. VM1, Disk1, and storage1 only
- D. VM1, Disk1, NetInt1, and VNet1

Answer: D

Explanation:

When you move a virtual machine to a different subscription, you need to move all the resources that are associated with the virtual machine, such as the disks, the network interface, and the virtual network. You cannot move a virtual machine without moving its dependent resources. You also need to ensure that the target subscription supports the same region, resource type, and API version as the source subscription. Then, References: [Move a Windows VM to another Azure subscription or resource group]

NEW QUESTION 171

- (Topic 5)

You have an Azure Active Directory (Azure AD) tenant named contoso.onmicrosoft.com. The User administrator role is assigned to a user named Admin1.

An external partner has a Microsoft account that uses the user1@outlook.com sign in.

Admin1 attempts to invite the external partner to sign in to the Azure AD tenant and receives the following error message: "Unable to invite user user1@outlook.com – Generic authorization exception." You need to ensure that Admin1 can invite the external partner to sign in to the Azure AD tenant.

What should you do?

- A. From the Roles and administrators blade, assign the Security administrator role to Admin1.
- B. From the Organizational relationships blade, add an identity provider.
- C. From the Custom domain names blade, add a custom domain.
- D. From the Users settings blade, modify the External collaboration settings.

Answer: D

Explanation:

You can adjust the guest user settings, their access, who can invite them from "External collaboration settings" check this link <https://docs.microsoft.com/en-us/azure/active-directory/external-identities/delegate-invitations>

NEW QUESTION 175

HOTSPOT - (Topic 5)


You have an Azure App Service app named WebApp1 that contains two folders named Folder1 and Folder2.

You need to configure a daily backup of WebApp1. The solution must ensure that Folder2 is excluded from the backup.

What should you create first and what should you use to exclude Folder2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

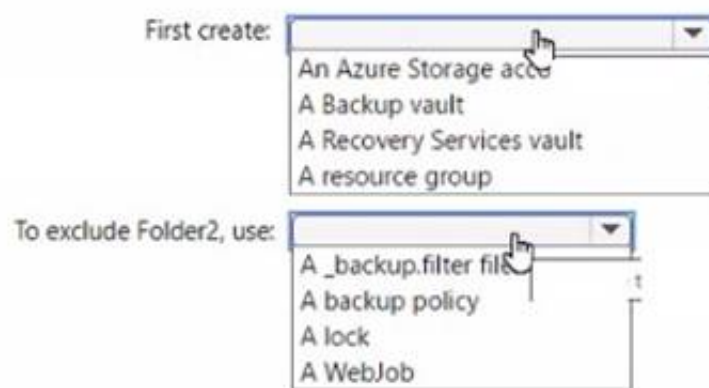

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

<https://learn.microsoft.com/en-us/azure/app-service/manage-backup?tabs=portal#create-a-custom-backup>

In Storage account, select an existing storage account (in the same subscription) or select Create new. Do the same with Container. <https://learn.microsoft.com/en-us/azure/app-service/manage-backup?tabs=portal#configure-partial-backups>

Partial backups are supported for custom backups (not for automatic backups). Sometimes you don't want to back up everything on your app. To exclude folders and files from being stored in your future backups, create a _backup.filter file in the %HOME%\site\wwwroot folder of your app. Specify the list of files and folders you want to exclude in this file.

NEW QUESTION 179

- (Topic 5)

You have an Azure subscription. The subscription contains a storage account named storage1 that has the lifecycle management rules shown in the following table.

Name	If base blobs were last modified more than (days)	Then
Rule1	5 days	Move to cool storage
Rule2	5 days	Delete the blob
Rule3	5 days	Move to archive storage

On June 1, you store a blob named File1 in the Hot access tier of storage1. What is the state of File1 on June 7?

- A. stored in the Archive access tier
- B. stored in the Hot access tier
- C. stored in the Cool access tier
- D. deleted

Answer: D

Explanation:

If you define more than one action on the same blob, lifecycle management applies the least expensive action to the blob. For example, action delete is cheaper than action tierToArchive. Action tierToArchive is cheaper than action tierToCool. <https://learn.microsoft.com/en-us/azure/storage/blobs/lifecycle-management-overview>

NEW QUESTION 182

- (Topic 5)

You have two Azure virtual networks named VNet1 and VNet2. VNet1 contains an Azure virtual machine named VM1. VNet2 contains an Azure virtual machine named VM2.

VM1 hosts a frontend application that connects to VM2 to retrieve data.

Users report that the frontend application is slower than usual.

You need to view the average round-trip time (RTT) of the packets from VM1 to VM2. Which Azure Network Watcher feature should you use?

- A. NSG flow logs
- B. Connection troubleshoot
- C. IP flow verify
- D. Connection monitor

Answer: D

Explanation:

<https://learn.microsoft.com/en-us/azure/network-watcher/network-watcher-monitoring-overview#monitoring>

The connection monitor capability monitors communication at a regular interval and informs you of reachability, latency, and network topology changes between the VM and the endpoint.

Connection monitor also provides the minimum, average, and maximum latency observed over time. After learning the latency for a connection, you may find that you can decrease the latency by moving your Azure resources to different Azure regions.

NEW QUESTION 187

HOTSPOT - (Topic 5)

You plan to deploy the following Azure Resource Manager (ARM) template.

```
{
  "$schema": "https://schema.management.azure.com/schemas/2015-01-01/deploymentTemplate.json#",
  "contentVersion": "1.0.0.0",
  "parameters": {},
  "variables": {
    "vnetId": "[resourceId('Microsoft.Network/virtualNetworks/', 'VNET1')]",
    "lbId": "[resourceId('Microsoft.Network/loadBalancers/', 'LB1')]",
    "sku": "Standard",
    "netname": "APP1"
  },
  "resources": [
    {
      "apiVersion": "2017-08-01",
      "type": "Microsoft.Network/loadBalancers",
      "name": "LB1",
      "location": "EastUS",
      "sku": {
        "name": "[variables('sku')]"
      },
      "properties": {
        "frontendIPConfigurations": [
          {
            "name": "[variables('netname')]",
            "id": "[concat(variables('vnetId'), '/subnets/', variables('netname'))]"
          }
        ],
        "backendAddressPools": [
          {
            "name": "[variables('netname')]-Servers",
            "id": "[concat(variables('lbId'), '/backendAddressPools/', variables('netname'), '-Servers')]"
          }
        ],
        "probes": [
          {
            "name": "probe",
            "properties": {
              "protocol": "Tcp",
              "port": 8080,
              "intervalInSeconds": 15,
              "numberOfProbes": 2
            }
          }
        ],
        "loadDistribution": "SourceIPProtocol"
      }
    }
  ],
  "loadBalancingRules": [
    {
      "name": "[variables('netname')]-Rule",
      "id": "[concat(variables('lbId'), '/loadBalancingRules/', variables('netname'))]",
      "properties": {
        "frontendIPConfiguration": "[variables('netname')]",
        "backendAddressPool": "[variables('netname')]-Servers",
        "probe": "[variables('netname')]-probe"
      }
    }
  ]
}
```

For each of the following statements, select Yes . Otherwise, select No. NOTE: Each correct selection is worth one point.

Statements	Yes	No
LB1 will be connected to a subnet named VNET1/netname.	<input type="radio"/>	<input type="radio"/>

LB1 can be deployed only to the resource group that contains VNET1.	<input type="radio"/>	<input type="radio"/>
---	-----------------------	-----------------------

The value of the sku variable can be provided as a parameter when the template is deployed	<input type="radio"/>	<input type="radio"/>
--	-----------------------	-----------------------

Answer:

Statements	Yes	No
LB1 will be connected to a subnet named VNET1/netname.	<input checked="" type="radio"/>	<input type="radio"/>

LB1 can be deployed only to the resource group that contains VNET1.	<input type="radio"/>	<input checked="" type="radio"/>
---	-----------------------	----------------------------------

The value of the sku variable can be provided as a parameter when the template is deployed	<input type="radio"/>	<input checked="" type="radio"/>
--	-----------------------	----------------------------------

A. Mastered
B. Not Mastered

Answer: A

Explanation:

? LB1 will be connected to a subnet named LB1 in VNET1. Yes, this is correct. The template specifies that the load balancer resource named LB1 has a property called frontendIPConfigurations, which defines the subnet where the load balancer is located. The value of this property is a reference to the resource ID of the subnet named LB1 in VNET1. You can see this reference in line 38 of the template1.

? LB1 can be deployed only to the resource group that contains VNET1. No, this is not correct. The template does not specify a resource group for the load balancer resource, which means it can be deployed to any resource group in the same

subscription as VNET1. However, if you want to deploy the load balancer to a specific resource group, you can add a property called resourceGroup to the reference of the subnet in line 382.

? The value of the sku variable can be provided as a parameter when the template is

deployed. No, this is not correct. The template defines the sku variable as a constant value of "Standard" in line 9. This means that the value cannot be changed or overridden by a parameter when the template is deployed. If you want to make the sku value configurable, you need to change the variable definition to a parameter definition, and use the parameter reference instead of the variable reference in line 363.

NEW QUESTION 192

- (Topic 5)

You have an Azure subscription that contains an Azure SQL database named DB1.

You plan to use Azure Monitor to monitor the performance of DB1. You must be able to run queries to analyze log data.

Which destination should you configure in the Diagnostic settings of DB 1?

- A. Send to a Log Analytics workspace.
- B. Archive to a storage account.
- C. Stream to an Azure event hub.

Answer: A

Explanation:

? According to the Microsoft documentation, Azure Monitor collects and analyzes monitoring data from Azure resources, including Azure SQL databases. You can use Azure Monitor to monitor the performance of DB1 and run queries to analyze log data.

? To use Azure Monitor, you need to configure the diagnostic settings of DB1, which define the sources and destinations of the monitoring data. The sources are the types of metric and log data to send to the destinations, such as SQLInsights, Errors, Blocks, Deadlocks, etc. The destinations are one or more locations where you want to send the monitoring data, such as a Log Analytics workspace, a storage account, or an event hub.

? A Log Analytics workspace is a unique environment for Azure Monitor log data.

Each workspace has its own data repository and configuration, and data sources and solutions are configured to store their data in a particular workspace. You can use a Log Analytics workspace to run queries on the log data collected from DB1 and other resources using the Kusto query language. You can also create alerts, dashboards, and workbooks based on the log data in the workspace.

? A storage account is a place where you can store large amounts of unstructured

data, such as files, blobs, queues, tables, and disks. You can use a storage account to archive the monitoring data from DB1 for long-term retention or backup purposes. However, you cannot run queries on the log data in a storage account directly. You would need to use another tool or service to analyze the log data in a storage account.

? An event hub is a service that enables you to ingest and process large volumes of

streaming data from multiple sources. You can use an event hub to stream the monitoring data from DB1 to other applications or services that can consume and analyze the data in real time. However, you cannot run queries on the log data in an event hub directly. You would need to use another tool or service to analyze the log data in an event hub.

NEW QUESTION 195

HOTSPOT - (Topic 5)

You have several Azure virtual machines on a virtual network named VNet1. You configure an Azure Storage account as shown in the following exhibit.

Storage account

Firewalls and virtual networks

Private endpoint connections

Save

Discard

Refresh

Allow access from

All networks

Selected networks

Configure network security for your storage accounts.

Learn more

Virtual networks

Add existing virtual network

Add new virtual network

Virtual Network	Subnet	Address range	Endpoint Status	Resource Group	Subscription
VNET1	1			RG1	Visual Studio Premium with MSDN
	Prod	10.2.0.0/24	Enabled	RG1	Visual Studio Premium with MSDN

Firewall

Add IP ranges to allow access from the internet or your on-premises networks.

Add your client IP address ('51.145.137.40')

Address range

IP address or CIDR

Resource instances

Specify resource instances that will have access to your storage account based on their system-assigned managed identity.

Resource type

Instance name

Select a resource type

Select one or more instances

Exceptions

Allow trusted Microsoft services to access this storage account

Allow read access to storage logging from any network

Allow read access to storage metrics from any network

Network Routing

Determine how you would like to route your traffic as it travels from its source to an Azure endpoint.

Routing preference *

Microsoft network routing

Internet routing

Publish route-specific endpoints

Microsoft network routing

Internet routing

Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
 NOTE: Each correct selection is worth one point.

Answer Area

The virtual machines on the 10.2.9.0/24 subnet will have network connectivity to the file shares in the storage account [answer choice].

never

always

during a backup

never

Azure Backup will be able to back up the unmanaged hard disks of the virtual machines in the storage account [answer choice].

never

always

during a backup

never

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

NEW QUESTION 200

- (Topic 5)

You have an Azure subscription that contains a user named User1.

You need to ensure that User1 can deploy virtual machines and manage virtual networks. The solution must use the principle of least privilege.

Which role-based access control (RBAC) role should you assign to User1?

- A. Owner
- B. Virtual Machine Administrator Login Contributor
- C. Virtual Machine Contributor

Answer: D

Explanation:

To ensure that User1 can deploy virtual machines and manage virtual networks, you need to assign an RBAC role that grants the necessary permissions to

Passing Certification Exams Made Easy

visit - <https://www.surepassexam.com>

perform these tasks. The solution must also use the principle of least privilege, which means that you should only grant the minimum level of access required to accomplish the goal.

Based on these requirements, the best RBAC role to assign to User1 is D. Virtual Machine Contributor. This role allows User1 to create and manage virtual machines, disks, snapshots, and network interfaces. It also allows User1 to connect virtual machines to existing virtual networks and subnets. However, it does not allow User1 to create or delete virtual networks or subnets, or to access the virtual machines themselves. This role follows the principle of least privilege by limiting User1's access to only the resources and actions that are relevant to deploying virtual machines and managing virtual networks1.

NEW QUESTION 201

HOTSPOT - (Topic 5)

You create a Recovery Services vault backup policy named Policy1 as shown in the following exhibit.

Policy1

 Associated items  Delete  Save  Discard

Backup schedule

* Frequency * Time * Timezone
 Daily 11:00 PM (UTC) Coordinated Universal Time

Retention range

☒ Retention of daily backup point

* At * For
 11:00 PM 30 Day(s)

☒ Retention of weekly backup point

* On * At * For
 Sunday 11:00 PM 10 Week(s)

☒ Retention of monthly backup point

Week Based Day Based

* On * At * For
 1 11:00 PM 36 Month(s)

☒ Retention of yearly backup point

Week Based Day Based

* In * On * At * For
 March 1 11:00 PM 10 Year(s)

Answer Area

The backup that occurs on Sunday, March 1, will be retained for [answer choice].

The backup that occurs on Sunday, November 1, will be retained for [answer choice].

30 days
 10 weeks
 36 months
 10 years

These are the selections for the statement The backup that occurs on Sunday, March 1, will be retained for [answer choice].

30 days
 10 weeks
 36 months
 10 years

These are the selections for the statement The backup that occurs on Sunday, November 1, will be retained for [answer choice].

Answer:

Answer Area

The backup that occurs on Sunday, March 1, will be retained for [answer choice].

The backup that occurs on Sunday, November 1, will be retained for [answer choice].

30 days
 10 weeks
 36 months
 10 years

These are the selections for the statement The backup that occurs on Sunday, March 1, will be retained for [answer choice].

30 days
 10 weeks
 36 months
 10 years

These are the selections for the statement The backup that occurs on Sunday, November 1, will be retained for [answer choice].

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: 10 years

The yearly backup point occurs to 1 March and its retention period is 10 years.

Box 2: 36 months

The monthly backup point occurs on the 1 of every month and its retention period is 36 months.
Note: Azure retention policy takes the longest period of retention for each backup. In case of conflict between 2 different policies.

NEW QUESTION 203

- (Topic 5)
You have an Azure Storage account named storage1. You plan to use AzCopy to copy data to storage1. You need to identify the storage services in storage1 to which you can copy the data.
What should you identify?

- A. blob, file, table, and queue
- B. blob and file only
- C. file and table only
- D. file only
- E. blob, table, and queue only

Answer: B

Explanation:
<https://docs.microsoft.com/en-us/azure/import-export/storage-import-export-requirements>

NEW QUESTION 207

HOTSPOT - (Topic 5)
You plan to use Azure Network Watcher to perform the following tasks:
? Task1: Identify a security rule that prevents a network packet from reaching an Azure virtual machine
? Task2: Validate outbound connectivity from an Azure virtual machine to an external host
Which feature should you use for each task? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Task1:

IP flow verify

Next hop

Packet capture

Security group view

Traffic Analytics

Task2:

Connection troubleshoot

IP flow verify

Next hop

NSG flow logs

Traffic Analytics

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:
Box 1: IP flow verify
At some point, a VM may become unable to communicate with other resources, because of a security rule. The IP flow verify capability enables you to specify a source and destination IPv4 address, port, protocol (TCP or UDP), and traffic direction (inbound or outbound). IP flow verify then tests the communication and informs you if the connection succeeds or fails. If the connection fails, IP flow verify tells you which.
Box 2: Connection troubleshoot
Diagnose outbound connections from a VM: The connection troubleshoot capability enables you to test a connection between a VM and another VM, an FQDN, a URI, or an IPv4 address. The test returns similar information returned when using the connection monitor capability, but tests the connection at a point in time, rather than monitoring it over time, as connection monitor does. Learn more about how to troubleshoot connections using connection-troubleshoot.

NEW QUESTION 212

- (Topic 5)
Your company has an Azure subscription named Subscription1.
The company also has two on-premises servers named Server1 and Server2 that run Windows Server 2016. Server1 is configured as a DNS server that has a primary DNS zone named adatum.com. Adatum.com contains 1,000 DNS records.
You manage Server1 and Subscription1 from Server2. Server2 has the following tools installed:
? The DNS Manager console
? Azure PowerShell

? Azure CLI 2.0
You need to move the adatum.com zone to Subscription1. The solution must minimize administrative effort.
What should you use?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:
Azure DNS supports importing and exporting zone files by using the Azure command-line interface (CLI). Zone file import is not currently supported via Azure PowerShell or the Azure portal.
References: <https://docs.microsoft.com/en-us/azure/dns/dns-import-export>

NEW QUESTION 217
- (Topic 5)
You have an Azure Subscription that contains the virtual networks Shown in the following table.

Name	Location
Vnet1	US East
Vnet2	US East
Vnet3	US East
Vnet4	UK South
Vnet5	UK South
Vnet6	UK South
Vnet7	Asia East
Vnet8	Asia East
Vnet9	Asia East
Vnet10	Asia East

All the virtual networks are peered. Each virtual network contains nine virtual machines. You need to configure secure RDP connections to the virtual machines by using Azure Bastion.
What is the minimum number of Bastion hosts required?

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:
? According to the Microsoft documentation, Azure Bastion is a service that provides more secure and seamless RDP and SSH access to virtual machines without any exposure through public IP addresses. You can provision the service directly in your local or peered virtual network to get support for all the VMs within it.
? In your scenario, you have three virtual networks that are peered with each other.
This means that they can communicate with each other as if they were in the same virtual network. Therefore, you can deploy one Bastion host in any of the virtual networks and use it to connect to all the virtual machines in the peered virtual networks. You don't need to deploy a separate Bastion host for each virtual network or each virtual machine.
? For more information about how to deploy and use Azure Bastion, see Tutorial: Deploy Bastion using specified settings: Azure portal.

NEW QUESTION 218
- (Topic 5)
You have an Azure subscription that has Traffic Analytics configured.
You deploy a new virtual machine named VM1 that has the following settings:
• Region- East US
• Virtual network: VNet1
• NIC network security group: NSG1
You need to monitor VM1 traffic by using Traffic Analytics. Which settings should you configure?

- A. Diagnostic settings for VM1
- B. Insights for VM1
- C. NSG flow logs for NSG1
- D. Diagnostic settings for NSG1

Answer: C

Explanation:
Traffic Analytics analyzes the network security group (NSG) flow logs to provide insights into traffic flow in your Azure cloud1. NSG flow logs are a feature of Network Watcher that allows you to view information about ingress and egress IP traffic through an NSG2. To use Traffic Analytics, you need to enable NSG flow logs for the network security groups you want to monitor1.
Diagnostic settings for VM1 or NSG1 are not required for Traffic Analytics. Diagnostic settings are used to stream log data from an Azure resource to different destinations such as Log Analytics workspace, Event Hubs, or Storage account3. Insights for VM1 are also not required for Traffic Analytics. Insights are a feature

of Azure Monitor that provide analysis of the performance and health of an Azure resource4.

NEW QUESTION 220

HOTSPOT - (Topic 5)

You have an Azure subscription named Subscription1. In Subscription1, you create an alert rule named Alert1. The Alert1 action group is configured as shown in the following exhibit.

```
PS Azure:\> Get-AzureRmActionGroup

ResourceGroupName: default-activitylogalerts
GroupShortName    : AG1
Enabled           : True
EmailReceivers    : {Action1_-EmailAction-}
SmsReceivers      : {Acrtion_-SMSAction-}
WebhookReceivers  : {}
Id                : /subscriptions/a4fde29b-d56a-4f6c-8298-6c53cd0b720c/
resourceGroups/default-activitylogalerts/providers/microsoft.insights/actionGroups/ActionGroup1
Name              : ActionGroup1
Type              : Microsoft.Insights/ActionGroups
Location          : Global
Tags              : {}
```

Alert1 alert criteria is triggered every minute.
Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.

The number of email messages that Alert1 will send in an hour is [answer choice].

0
4
6
12
60

The number of SMS messages that Alert1 will send in an hour is [answer choice].

0
4
6
12
60

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1: 60
One alert per minute will trigger one email per minute.
Box 2: 12
No more than 1 SMS every 5 minutes can be send, which equals 12 per hour.
Note: Rate limiting is a suspension of notifications that occurs when too many are sent to a particular phone number, email address or device. Rate limiting ensures that alerts are
manageable and actionable.
The rate limit thresholds are:
_ SMS: No more than 1 SMS every 5 minutes. Voice: No more than 1 Voice call every 5 minutes. Email: No more than 100 emails in an hour.
_ Other actions are not rate limited.
References:
<https://github.com/MicrosoftDocs/azure-docs/blob/master/articles/monitoring-and-diagnostics/monitoring-overview-alerts.md>

NEW QUESTION 222

HOTSPOT - (Topic 5)

You have two Azure virtual machines as shown in the following table.

Name	Operating system	Private IP address	Public IP address	DNS suffix configured in the operating system	Connected to
vm1	Windows Server 2019	10.0.1.4	131.107.50.20	Contoso.com	vnet1
vm2	SUSE Linux Enterprise Server 15 (SLES) SP2	10.0.1.5	131.107.90.80	None	vnet1

You create the Azure DNS zones shown in the following table.

Name	Type
Contoso.com	DNS zone
Fabrikam.com	Private DNS zone

You perform the following actions:
? To fabrikam.com, you add a virtual network link to vnet1 and enable auto registration.
? For contoso.com, you assign vm1 and vm2 the Owner role.
For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worm one point.

Statements	Yes	No
The DNS A record for vm1 is added to contoso.com and has the IP address of 131.107.50.20.	<input type="radio"/>	<input type="radio"/>
The DNS A record for vm1 is added to fabrikam.com and has the IP address of 10.0.1.4.	<input type="radio"/>	<input type="radio"/>
The DNS A record for vm2 is added to fabrikam.com and has the IP address of 10.0.1.5.	<input type="radio"/>	<input type="radio"/>

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Statements	Yes	No
The DNS A record for vm1 is added to contoso.com and has the IP address of 131.107.50.20.	<input checked="" type="radio"/>	<input type="radio"/>
The DNS A record for vm1 is added to fabrikam.com and has the IP address of 10.0.1.4.	<input checked="" type="radio"/>	<input type="radio"/>
The DNS A record for vm2 is added to fabrikam.com and has the IP address of 10.0.1.5.	<input type="radio"/>	<input checked="" type="radio"/>

NEW QUESTION 224

- (Topic 5)
Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.
After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.
You need to ensure that an Azure Active Directory (Azure AD) user named Admin1 is assigned the required role to enable Traffic Analytics for an Azure subscription.
Solution: You assign the Network Contributor role at the subscription level to Admin1. Does this meet the goal?

- A. Yes
- B. NO

Answer: A

Explanation:

Your account must meet one of the following to enable traffic analytics:
Your account must have any one of the following Azure roles at the subscription scope: owner, contributor, reader, or network contributor.
Reference:
<https://docs.microsoft.com/en-us/azure/network-watcher/traffic-analytics-faq>

NEW QUESTION 226

HOTSPOT - (Topic 5)
You have two Azure subscriptions named Sub1 and Sub2. Sub1 is in a management group named MG1. Sub2 is in a management group named MG2.
You have the resource groups shown in the following table.

Name	Subscription
RG1	Sub1
RG2	Sub2

You have the virtual machines shown in the following table.

Name	Resource group
VM1	RG1
VM2	RG2
VM3	RG2

You assign roles to users as shown in the following table.

User	Role	Resource
User1	Virtual Machine Contributor	MG1
User1	Virtual Machine User Login	Sub2
User2	Virtual Machine Contributor	MG2
User2	Virtual Machine User Login	Sub1
User2	Virtual Machine User Login	VM3

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
 NOTE: Each correct selection is worth one point.

Answer Area

Statements

Yes

No

User1 can sign in to VM1.

☐

☐

User2 can manage disks and disk snapshots of VM1.

☐

☐

User2 can manage disks and disk snapshots of VM3.

☐

☐

Answer:

Answer Area

Statements

Yes

No

User1 can sign in to VM1.

☒

☐

User2 can manage disks and disk snapshots of VM1.

☐

☒

User2 can manage disks and disk snapshots of VM3.

☒

☐

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

User 2 has the Disk Snapshot Contributor role assigned at the scope of MG2. This role allows the user to manage disk snapshots in the management group. VM3 is a virtual machine in RG3, which is in Sub2, which is in MG2. Therefore, User 2 has the permission to manage disks and disk snapshots of VM3.

NEW QUESTION 229

- (Topic 5)

You have an Azure subscription that contains the resources shown in the following table.

Name	Type	Location
VNET1	Virtual network	East US
IP1	Public IP address	West Europe
RT1	Route table	North Europe

You need to create a network interface named NIC1. In which location can you create NIC1?

- A. East US and North Europe only.
- B. East US and West Europe only.
- C. East US, West Europe, and North Europe.
- D. East US only.

Answer: D

Explanation:

Before creating a network interface, you must have an existing virtual network in the same location and subscription you create a network interface in. If you try to create a NIC on a location that does not have any Vnets you will get the following error: "The currently selected subscription and location lack any existing virtual networks. Create a virtual network first."

Reference:

<https://docs.microsoft.com/en-us/azure/virtual-network/virtual-network-network-interface>

NEW QUESTION 233

- (Topic 5)

You create an Azure Storage account named Contoso storage. You plan to create a file share named data. Users need to map a drive to the data file share from home computers that run Windows 10. Which outbound port should be open between the home computers and the data file share?

- A. 80
- B. 443
- C. 445
- D. 3389

Answer: C

Explanation:

Ensure port 445 is open: The SMB protocol requires TCP port 445 to be open; connections will fail if port 445 is blocked.
References: <https://docs.microsoft.com/en-us/azure/storage/files/storage-how-to-use-files- windows>

NEW QUESTION 234

HOTSPOT - (Topic 5)

You have an Azure subscription named Subscription1. Subscription1 contains two Azure virtual machines named VM1 and VM2. VM1 and VM2 run Windows Server 2016. VM1 is backed up daily by Azure Backup without using the Azure Backup agent. VM1 is affected by ransomware that encrypts data. You need to restore the latest backup of VM1. To which location can you restore the backup? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

You can perform a file recovery of VM1 to:

<input type="checkbox"/>	VM1 only
<input type="checkbox"/>	VM1 or a new Azure virtual machine only
<input type="checkbox"/>	VM1 and VM2 only
<input type="checkbox"/>	A new Azure virtual machine only
<input type="checkbox"/>	Any Windows computer that has Internet connectivity

You can restore VM1 to:

<input type="checkbox"/>	VM1 only
<input type="checkbox"/>	VM1 or a new Azure virtual machine only
<input type="checkbox"/>	VM1 and VM2 only
<input type="checkbox"/>	Any Windows computer that has Internet connectivity

Answer:

You can perform a file recovery of VM1 to:

<input type="checkbox"/>	VM1 only
<input type="checkbox"/>	VM1 or a new Azure virtual machine only
<input checked="" type="checkbox"/>	VM1 and VM2 only
<input type="checkbox"/>	A new Azure virtual machine only
<input type="checkbox"/>	Any Windows computer that has Internet connectivity

You can restore VM1 to:

<input type="checkbox"/>	VM1 only
<input checked="" type="checkbox"/>	VM1 or a new Azure virtual machine only
<input type="checkbox"/>	VM1 and VM2 only
<input type="checkbox"/>	Any Windows computer that has Internet connectivity

- A. Mastered
- B. Not Mastered

Answer: A

Explanation:

Box 1 : VM1 and VM2 only
When recovering files, you can't restore files to a previous or future operating system version.You can restore files from a VM to the same server operating system, or to the compatible client operating system. Therefore -
"VM1 and VM2 only" is the best answer since both run on Windows Server 2016.
"A new Azure virtual machine only" ,this will also work but why to create unnecessary new VM in Azure if existing VM will do the task. So this option is incorrect.
Box 2 : VM1 or A new Azure virtual machine only

When restoring a VM, you can't use the replace existing VM option for encrypted VMs. This option is only supported for unencrypted managed disks. And also You can restore files from a VM to the same server operating system, or to the compatible client operating system only. Hence "VM1 or A new Azure virtual machine only" is correct answer.

References: <https://docs.microsoft.com/en-us/azure/backup/backup-azure-arm-restore-vms> <https://docs.microsoft.com/en-us/azure/backup/backup-azure-restore-files-from-vm#system-requirements>

NEW QUESTION 236

- (Topic 5)
You have an Azure subscription named Subscription1. Subscription1 contains the resource groups in the following table.

Name	Azure region	Assigned Azure Policy
RG1	West Europe	Policy1
RG2	North Europe	Policy2
RG3	France Central	Policy3

RG1 has a web app named WebApp1. WebApp1 is located in West Europe. You move WebApp1 to RG2.
What is the effect of the move?

- A. The App Service plan for WebApp1 moves to North Europ
- B. Po1icy2 applies to WebApp1.
- C. The App Service plan for WebApp1 remains in West Europ
- D. Policy2 applies to WebApp1.
- E. The App Service plan for WebApp1 moves to North Europ
- F. Policy1 applies to WebApp1.
- G. The App Service plan for WebApp1 remains in West Europ
- H. Policy1 applies to WebApp1.

Answer: B

NEW QUESTION 239

- (Topic 5)
You have an Azure Active Directory (Azure AD) tenant named contoso.com.
You have a CSV file that contains the names and email addresses of 500 external users. You need to create a quest user account in contoso.com for each of the 500 external users.
Solution: from Azure AD in the Azure portal, you use the Bulk create user operation. Does this meet the goal?

- A. Yes
- B. No

Answer: B

Explanation:
"Bulk Create" is for new Azure AD Users. For Guests:
- Use "Bulk invite users" to prepare a comma-separated value (.csv) file with the user information and invitation preferences
- Upload the .csv file to Azure AD
- Verify the users were added to the directory

NEW QUESTION 240

.....

Thank You for Trying Our Product

We offer two products:

1st - We have Practice Tests Software with Actual Exam Questions

2nd - Questons and Answers in PDF Format

AZ-104 Practice Exam Features:

- * AZ-104 Questions and Answers Updated Frequently
- * AZ-104 Practice Questions Verified by Expert Senior Certified Staff
- * AZ-104 Most Realistic Questions that Guarantee you a Pass on Your FirstTry
- * AZ-104 Practice Test Questions in Multiple Choice Formats and Updatesfor 1 Year

100% Actual & Verified — Instant Download, Please Click
[Order The AZ-104 Practice Test Here](#)